

NS 35/15 AL UNPERF 2000MM

Order No.: 1201756

The illustration shows version NS 35/15-AL without holes with captive slide nut
GLM 4<http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1201756>DIN rail, deep-drawn, high profile, unperforated, 1.5 mm thick,
material: Aluminum, height 15 mm, width 35 mm, length 2 m

Commercial data

EAN	4017918017477
Pack	5 pcs.
Customs tariff	76042990
Weight/Piece	0.71 KG
Catalog page information	Page 695 (CL-2009)

Product notes

WEEE/RoHS-compliant since:
01/01/2003

<http://www.download.phoenixcontact.com>
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General data


Height	15 mm
Length	2000 mm
Width	35 mm
Material	Aluminum
Color	silver

Test standard

Similar to EN 60715: 2001

Diagrams/Drawings

Dimensioned drawing

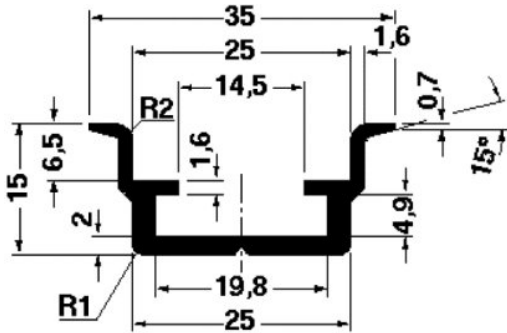

Address

PHOENIX CONTACT Deutschland GmbH
Flachmarktstr. 8
32825 Blomberg, Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
<http://www.phoenixcontact.de>



© 2010 Phoenix Contact
Technical modifications reserved;