
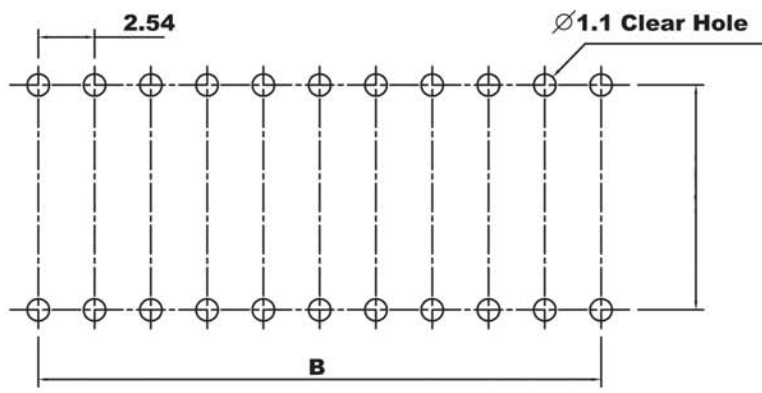
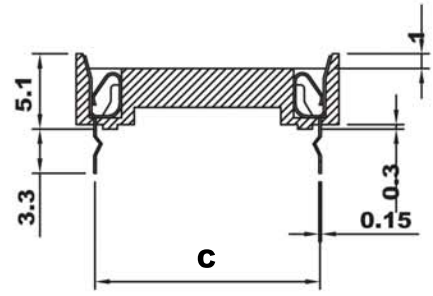
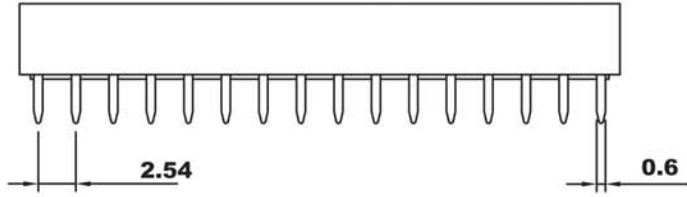


IC Socket 2.54mm(0.100")

Specifications

Contact Resistance: 30 mohms max. at DC 100mA
 Insulator Resistance: 1000 megohms min. at DC 500V
 Current Rating: 1 Amp
 Dielectric Withstanding Voltage: AC 500V for 1 minute
 Operating Temperature: -55°~+105°C
 Contact: Phosphor Bronze
 Housing: PBT & 30% Glass Fiber (UL 94V-0)

| No. of Contacts | Qty per Tube | Dimensions | | |
|-----------------|--------------|------------|-------|-------|
| | | A | B | C |
| 06 | 80 | 7.62 | 10.0 | 7.62 |
| 08 | 60 | 10.06 | 9.96 | 7.62 |
| 14 | 34 | 17.68 | 9.96 | 7.62 |
| 16 | 30 | 20.22 | 9.96 | 7.62 |
| 18 | 26 | 22.76 | 9.96 | 7.62 |
| 20 | 24 | 22.86 | 9.96 | 7.62 |
| 22 | 21 | 27.80 | 9.96 | 7.62 |
| 22* | 21 | 27.70 | 12.62 | 10.16 |
| 24 | 20 | 30.38 | 17.68 | 15.24 |
| 24** | 20 | 30.38 | 17.68 | 7.62 |
| 28 | 17 | 35.46 | 17.68 | 15.24 |
| 28** | 17 | 35.46 | 17.68 | 7.62 |
| 32 | 15 | 40.50 | 17.68 | 15.24 |
| 40 | 12 | 50.70 | 17.68 | 15.24 |

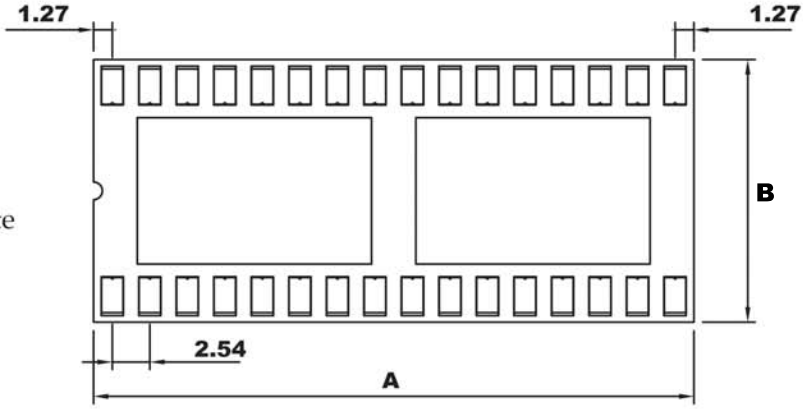

Recommended P.C.B. Layout

| | |
|---|--|
| Description | |
| Name: AXX-LC-TR-R | |
| Low Cost IC Socket 2.54mm, Retentive Leg | |
| | |

THIS DRAWING IS UNPUBLISHED

© Copyright 2005 by Assmann Electronic Components All International Rights Reserved

This drawing is a controlled document for Assmann Electronics, Inc. It is subject to change and the controlling engineering organization should be contacted for the latest revision.