

Ultra compact and efficient 1-stage filter in ECO design for 3-phase systems



Description

- High attenuation value
- Cost optimized filter design with excellent price / performance ratio
- Very light due to partial potting

Standards

- IEC 60939
- UL 1283

Approvals

- VDE Certificate Number: pending
- UL File Number: pending

Applications

- Voltage rating 480 VAC for world wide acceptance
- Especially designed for industrial applications such as: Frequency Converters, Stepper Motor Drives, UPS-Systems, Inverters
- Qualified for use in equipment according IEC/EN 60950

References

Weblinks

[General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)


Technical Data

| | |
|---------------------------------|--|
| Rated Current | 16 - 150A @ Ta 40°C |
| Rated voltage | 480VAC, 50/60 Hz |
| Approval for | 16 - 150A @ Ta 40 °C / 480VAC; 50/60Hz |
| Overload Current | 1.5 x Ir |
| Leakage Current | < 33mA (440V / 50Hz) |
| Dielectric Strength for 480 VAC | > 2.25kVDC between L-L > 3kVDC between L-PE Test voltage 2 sec |
| Number of Filter Stages | 1 |
| Weight | 1 - 7 kg |
| Sealing Compound | UL 94V-0 |


| | |
|----------------------------|---|
| Mounting | Screw-on mounting on chassis, upright or lengthwise |
| Terminal | Screw terminals |
| Operating Temperature [°C] | -25°C to 100°C |
| Climatic Category | 25/100/21 acc. to IEC 60068-1 |
| Degree of Protection | IP 20 acc. to IEC 60529 |
| Protection Class | Suitable for appliances with protection class 1 acc. to IEC 61140 |
| MTBF | > 200'000h acc. to MIL-HB-217 F |

Dimensions

Case 1C

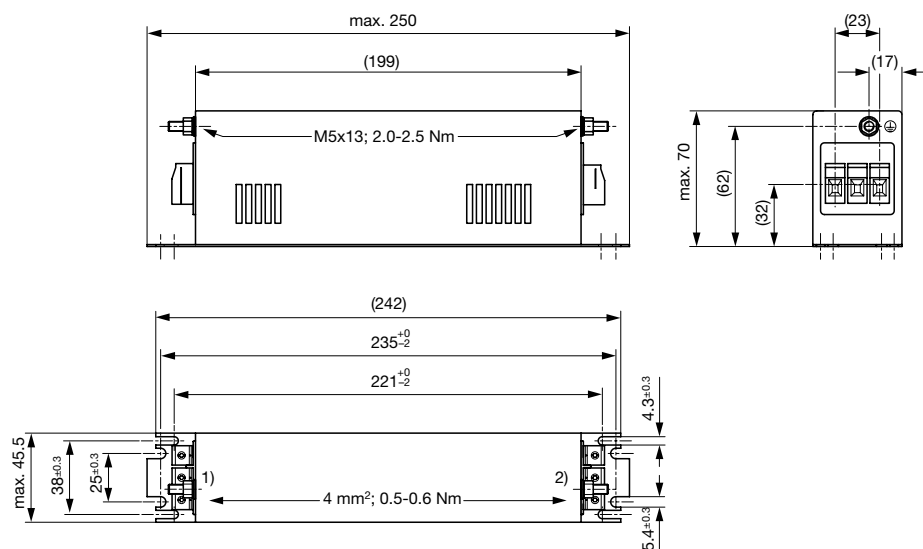


1) Line
2) Load
Case 1D-6

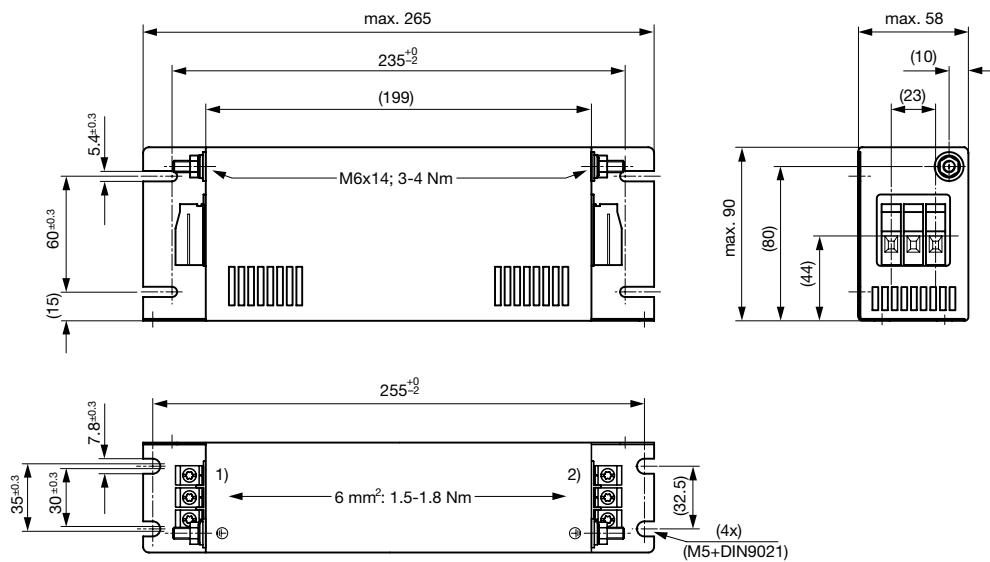


1) Line
2) Load

Case 1D-10

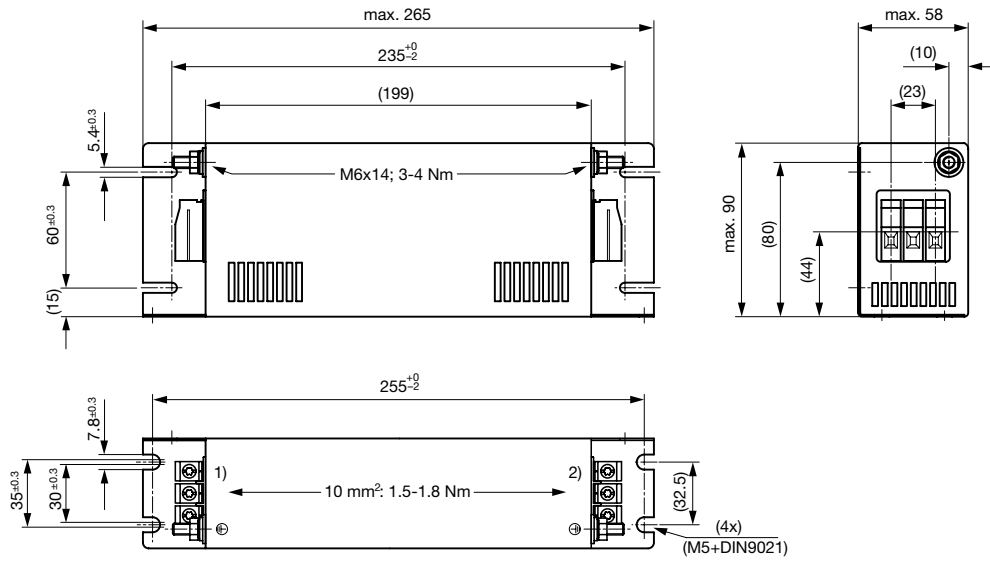


- 1) Line
- 2) Load

Case 1E

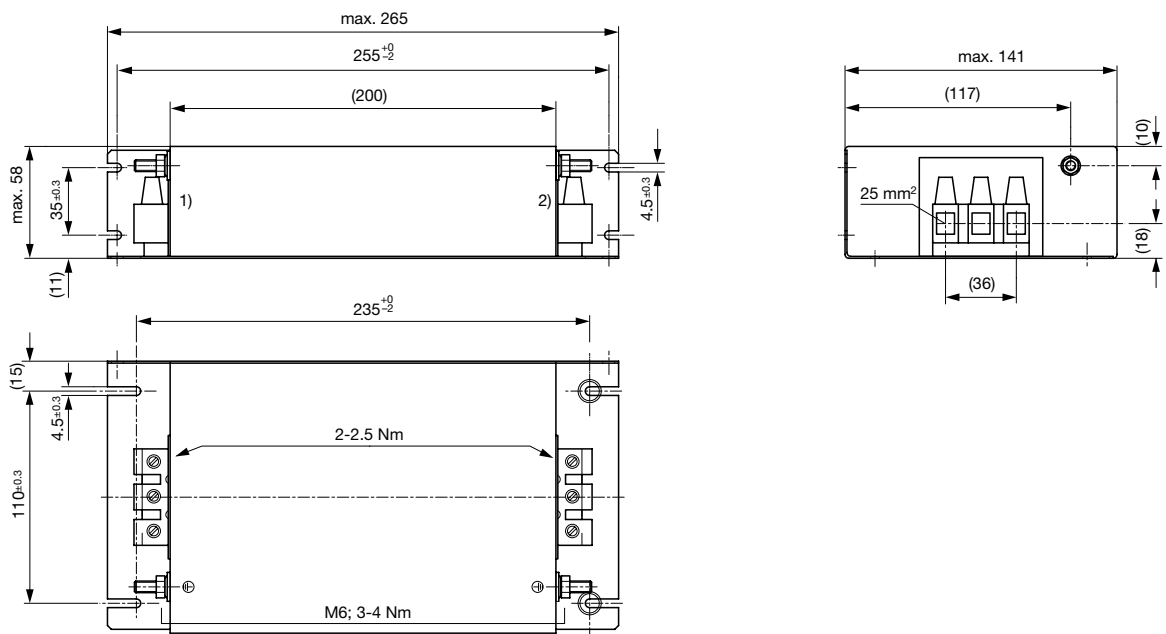


- 1) Line
- 2) Load

Case 1T

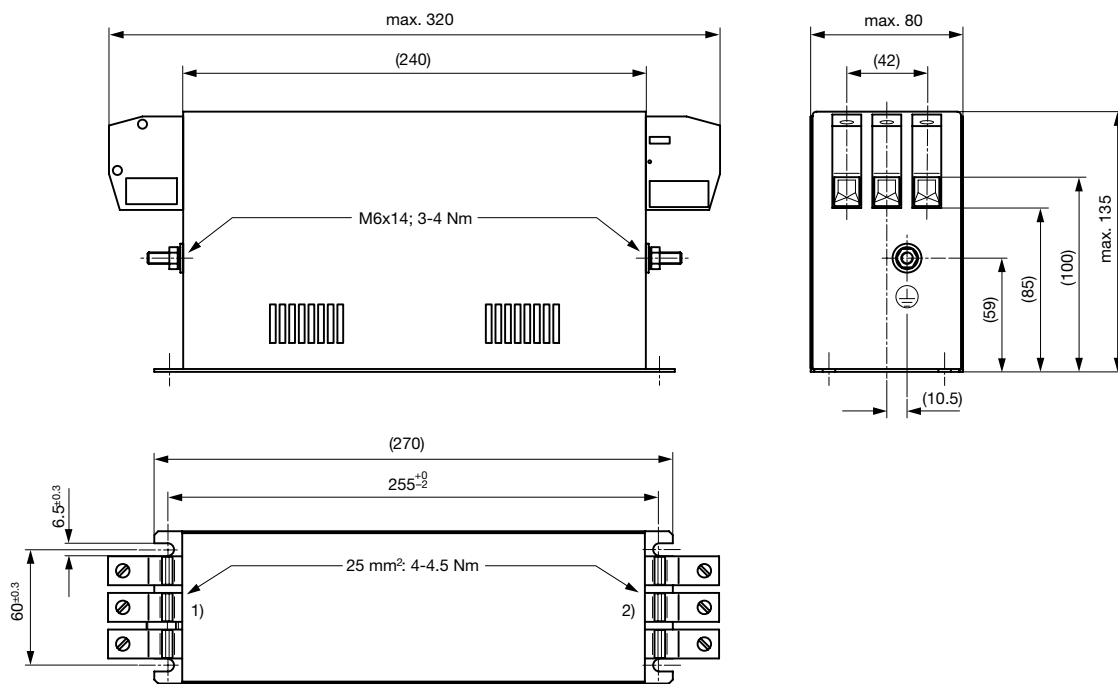

- 1) Line
- 2) Load

Case 1G

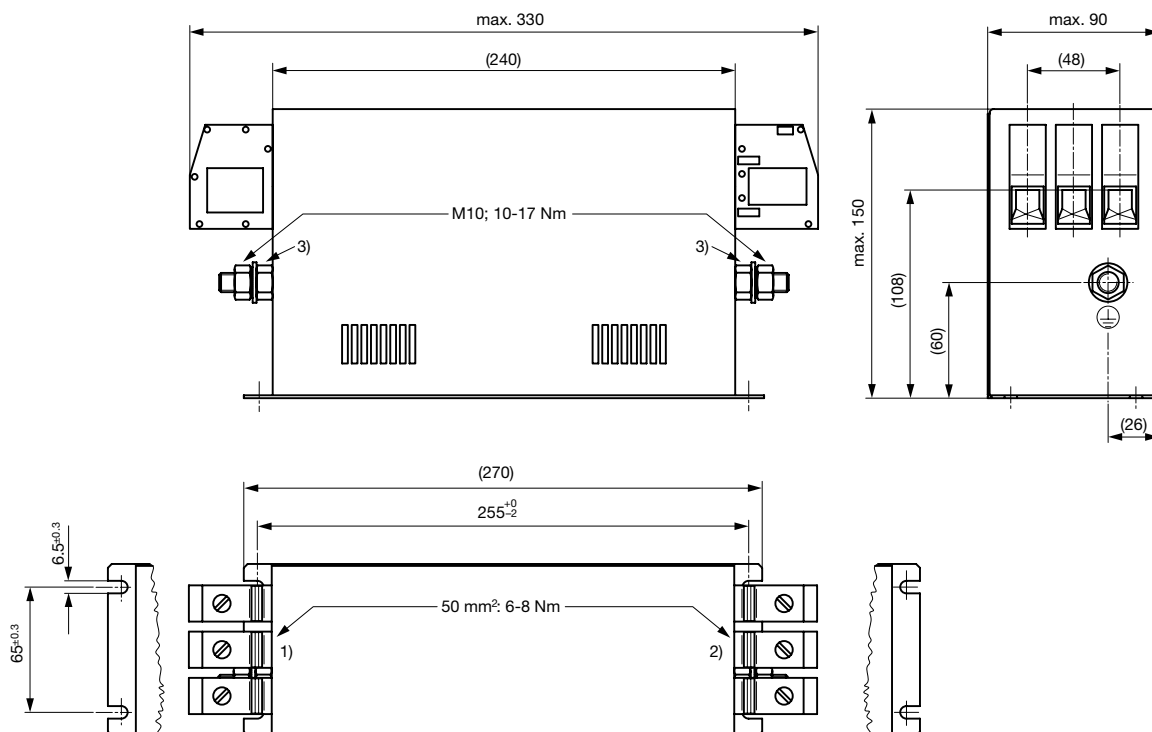


- 1) Line
- 2) Load
- 3) Do not unscrew lock-nut, keep lock-nut fastened while tightening

Technical data to the filter components

| Rated Current [A] | L [mH] | C1 [µF] | C2 [µF] | C3 [µF] | R1 [MΩ] | R2 [MΩ] | Filter-Type |
|-------------------|--------|---------|---------|---------|---------|---------|-------------|
| 110 | 0.55 | 6.6 | 6.6 | 3.3 | 1 | 1 | Indus- |
| 150 | 0.48 | 6.6 | 6.6 | 3.3 | 1 | 1 | Indus- |
| 16 | 0.55 | 2.2 | 2.2 | 3.3 | 1 | 1 | Indus- |
| 25 | 0.45 | 2.2 | 2.2 | 3.3 | 1 | 1 | Indus- |
| 36 | 0.57 | 2.2 | 2.2 | 3.3 | 1 | 1 | Indus- |
| 43/80 | 0.55 | 4.7 | 4.7 | 3.3 | 1 | 1 | Indus- |
| 50 | 0.65 | 4.7 | 3.3 | 3.3 | 1 | 1 | Indus- |
| 55 | 0.75 | 4.7 | 3.3 | 3.3 | 1 | 1 | Indus- |
| 64 | 0.55 | 4.7 | 4.7 | 3.3 | 1 | 1 | Indus- |

Diagrams

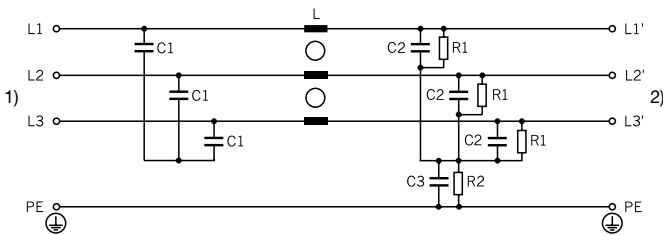


- 1) Line
- 2) Load


Attenuation Loss 0.1/100Ω differential mode 100/0.1Ω differential mode - - - - differential mode ____ common mode

Industrial Version


16A (FMAC-091C-1610)




25A (FMAC-091C-2510)




36A (FMAC-091D-3610)




50A (FMAC-091D-5010)




55A (FMAC-091D-5510)




64A (FMAC-091E-6410)




80A (FMAC-091T-8010)



110A (FMAC-091G-H110)



150A (FMAC-091G-H210)



Variants

| Rated Current @ Ta 40°C (75°C) [A] | Characteristic | Rated Voltage [VAC] | Tripped Power Dissipation [W] | Leakage Current [mA] ¹⁾ | Contact Resistance [mΩ] | Weight [kg] | Screw clamps [mm ²] ²⁾ | Housing | Order Number |
|--|------------------|---------------------|-------------------------------|------------------------------------|-------------------------|-------------|---|---------|----------------|
| 16 | High attenuation | 480 | 6 | 96 | 7.6 | 1 | 4 | 1C | FMAC-091C-1610 |
| 25 | High attenuation | 480 | 8 | 96 | 4.1 | 1 | 4 | 1C | FMAC-091C-2510 |
| 36 | High attenuation | 480 | 10 | 96 | 2.5 | 1.3 | 6 | 1D-6 | FMAC-091D-3610 |
| 50 | High attenuation | 480 | 13 | 103 | 1.7 | 1.7 | 10 | 1D-10 | FMAC-091D-5010 |
| 55 | High attenuation | 480 | 14 | 103 | 1.5 | 1.7 | 10 | 1D-10 | FMAC-091D-5510 |
| 64 | High attenuation | 480 | 17 | 103 | 1.4 | 2 | 25 | 1E | FMAC-091E-6410 |
| 43/80 | High attenuation | 480 | 22 | 110 | 1.1 | 5.1 | 25 | 1T | FMAC-091T-8010 |
| 110 | High attenuation | 480 | 28 | 110 | 0.8 | 5.8 | 50 | 1G | FMAC-091G-H110 |
| 150 | High attenuation | 480 | 40 | 110 | 0.6 | 7 | 50 | 1G | FMAC-091G-H210 |

1) Worst case leakage current acc. to IEC60950 - Annex G4 (situation with two interrupted lines). Nominal leakage current acc. to IEC60950 - 5.2.5. can be found in section technical data.

2) Maximum conductor cross section (wire gauge) to be used; a comparative table for AWG and mm² values can be found in the general product information www.schurter.com/emc_info

Packaging unit 1 Pcs