


PT. NO.	PARTS NAME	MATERIAL	Q'TY	NOTE
1	INSULATOR	PPS RESIN GLASS REINFORCED (UL94V-0)	1	COLOR : BROWN
2	CONTACT	PHOSPHOR BRONZE	n	PLATING : Sn Ni UNDER PLATED
3	MOUNTING PLATE		2	

RECOMMENDED PC BOARD LAYOUT
(COMPONENT SIDE)

n : NO. OF CONTACTS

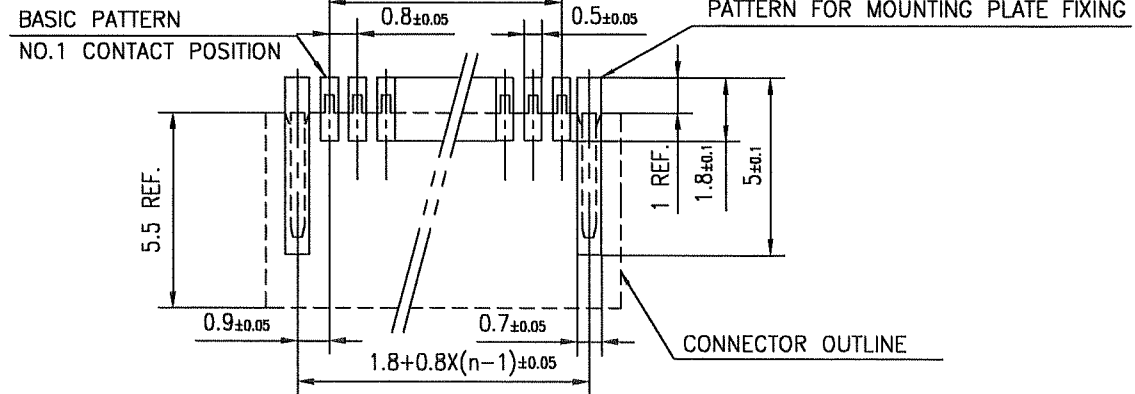

NOTE

- THIS IS SMT CONNECTOR FOR AUTOMATIC MOUNTING.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK TEMPERATURE FOR 10 SECONDS IN A REFLOW SOLDERING OVEN.

mat'l. code				surface ISO 1302 ✓	tolerance ISO 406 ISO 1101	projection 	product family 58AF	CODE JP	
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm 	title 0.8mm SPACING CONNECTOR (Cat. No. HFR__R-2ST__LF)		
A	J05-0450	H.T	7/15/05	angles	linear		scale \times	dwg no JSA 96606	
B	J05-0729	H.T	10/28/05					sheet 1 of 1 size A4	
C	J06-0494	H.T	11/22/06	dr	<i>[Signature]</i> 11/22/06		type Product Customer Drawing		
				enrg	<i>[Signature]</i> 11/22/06		sheet 1 of 1 size A4		
				chr	<i>[Signature]</i> 11/22/06		type Product Customer Drawing		
				appd	<i>[Signature]</i> 11/22/06		type Product Customer Drawing		
sheet index	revision sheet	C	1					Rev. c	

SC-HFR02 JSA96605
form: A4