



REV.	DESCRIPTION	DATE
A	NEW DRAWING	10/25/2005
B	added missing dimensions	1/29/2008

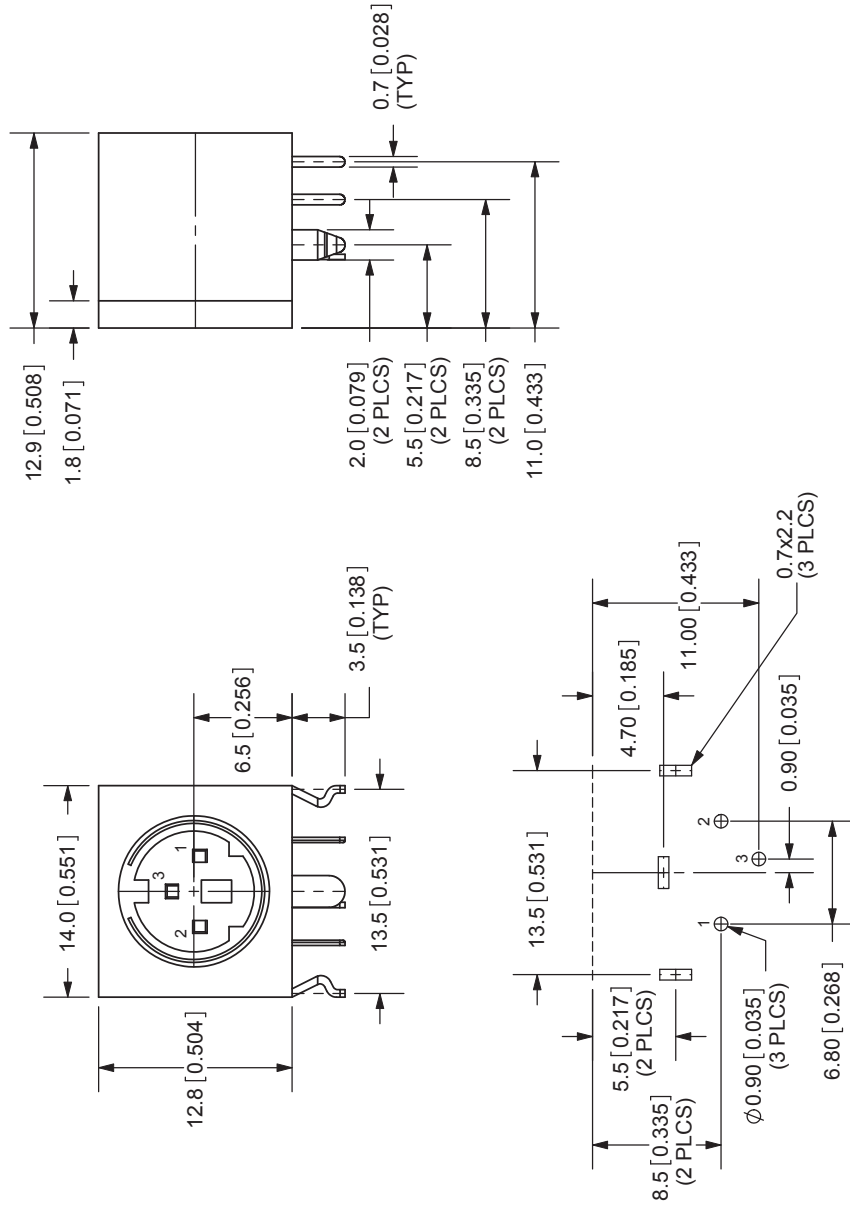

SPECIFICATIONS:
 RATING: 12V DC @ 2A; 100V AC @ 1A
 INSULATION RESISTANCE: 10M OHMS MIN: 250V DC
 VOLTAGE WITHSTAND: 250V AC R.M.S. FOR 1 MINUTE
 CONTACT RESISTANCE: 30m OHMS MAX
 INSERTION FORCE: 5KG MAX
 WITHDRAWAL FORCE: 0.8KG~3.5KG
 LIFE: 5,000 CYCLES
 OPERATING TEMP: -40° ~ +85°C

**HOLE LAYOUT
TOP VIEW**

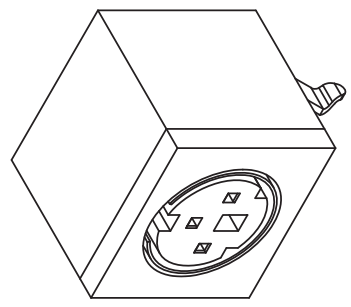

TOLERANCE:
 ±0.2mm UNLESS OTHERWISE
 SPECIFIED



20050 SW 112th Ave.
 Tualatin, OR 97062
 Phone: 503-612-2300
 800-275-4899
 Fax: 503-612-2383
 Website: www.cui.com

TITLE:	MINIATURE CIRCULAR DIN CONNECTOR	REV:	B
PART NO:	MD-30SMK	UNITS:	MM [INCHES]
DRAWN BY:	ZRJ	APPROVED BY:	
		SCALE:	2:1

SHIELDING PLATE	MATERIAL	PLATING
CONTACT TERMINALS (1-3)	Steel	Tin
EARTH TERMINALS	Phosphor Bronze	Silver
HOUSING	Brass	Tin
	PBT	