


LOC	DIST	P	F	ZONE	LTR	REVISIONS	DATE	APPD
AD	39				H	REV PER 063C-0185-00	26APR00	JPM

△ MOLDED CIRCUIT #1 IDENTIFIER IN LOCATION SHOWN.

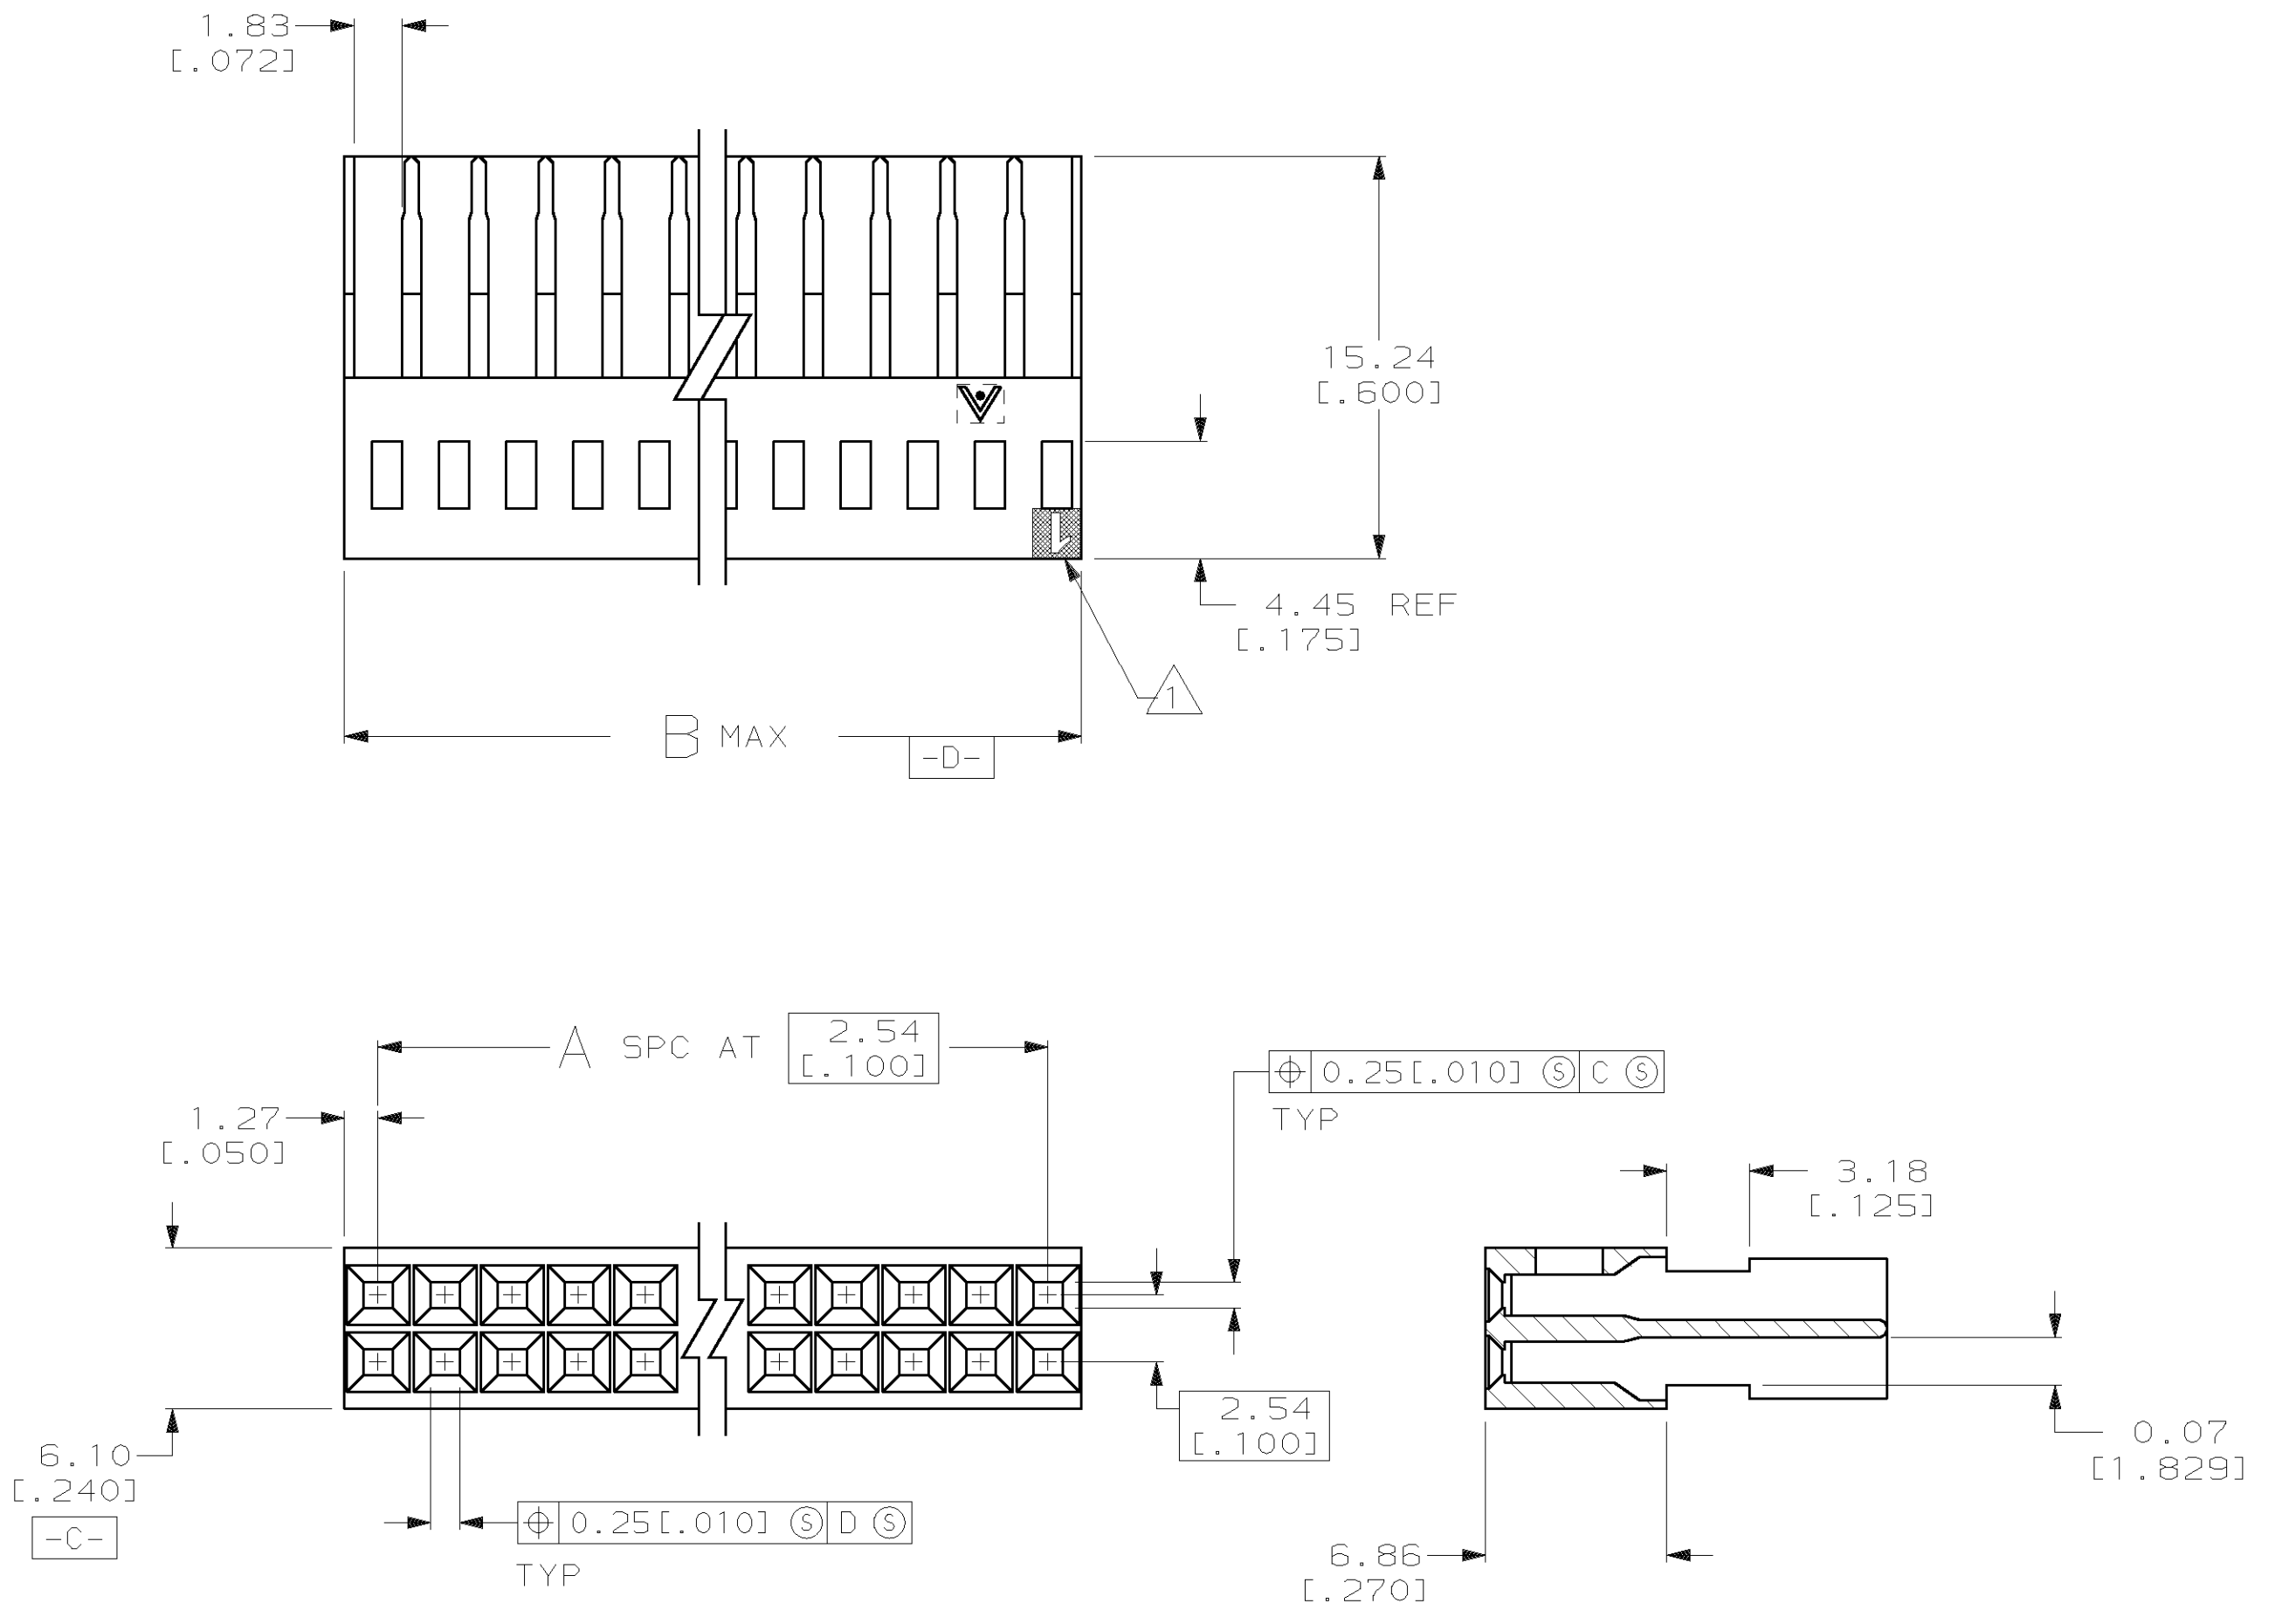

OBSOLETE

81.28 [3.200]	31	64	3-102394-0
78.74 [3.100]	30	62	2-102394-9
76.20 [3.000]	29	60	2-102394-8
73.66 [2.900]	28	58	2-102394-7
71.12 [2.800]	27	56	2-102394-6
68.58 [2.700]	26	54	2-102394-5
66.04 [2.600]	25	52	2-102394-4
63.50 [2.500]	24	50	2-102394-3
60.96 [2.400]	23	48	2-102394-2
58.42 [2.300]	22	46	2-102394-1
55.88 [2.200]	21	44	2-102394-0
53.34 [2.100]	20	42	1-102394-9
50.80 [2.000]	19	40	1-102394-8
48.26 [1.900]	18	38	1-102394-7
45.72 [1.800]	17	36	1-102394-6
43.18 [1.700]	16	34	1-102394-5
40.64 [1.600]	15	32	1-102394-4
38.10 [1.500]	14	30	1-102394-3
35.56 [1.400]	13	28	1-102394-2
33.02 [1.300]	12	26	1-102394-1
30.48 [1.200]	11	24	1-102394-0
27.94 [1.100]	10	22	102394-9
25.40 [1.000]	9	20	102394-8
22.86 [.900]	8	18	102394-7
20.32 [.800]	7	16	102394-6
17.78 [.700]	6	14	102394-5
15.24 [.600]	5	12	102394-4
12.70 [.500]	4	10	102394-3
10.16 [.400]	3	8	102394-2
7.62 [.300]	2	6	102394-1

91.44 [3.600]	35	72	3-102394-4
88.90 [3.500]	34	70	3-102394-3
86.36 [3.400]	33	68	3-102394-2
83.82 [3.300]	32	66	3-102394-1

PART NO.				PART NO.			
DO NOT SCALE PRINT. UNLESS SPECIFIED DIMENSIONS IN mm [INCHES]	DR 7-24-91 S. SHUEY	<b>AMP</b> AMP Incorporated Harrisburg, PA 17105-3508 NAME HSG, DBL ROW, 2.54 [.100] x 2.54 [.100] Q MT, AMPMODU					
TOLERANCES ON:	CHK 7-24-91 M. RIDER						
2 PLC DEC ± 0.13 [.005]	APPD 7-24-91 M. RIDER						
3 PLC DEC ± -	APPD 7-24-91 R. FELIX						
ANGLES ± -	PRODUCT SPEC -	SIZE D	CAGE CODE 00779	DRAWING NO 102394	SHEET 1 OF 1		
MATERIAL FLAME RETARDANT THERMOPLASTIC COLOR - BLACK	APPLICATION SPEC -	SCALE 4:1					
FINISH -	WEIGHT -						

