

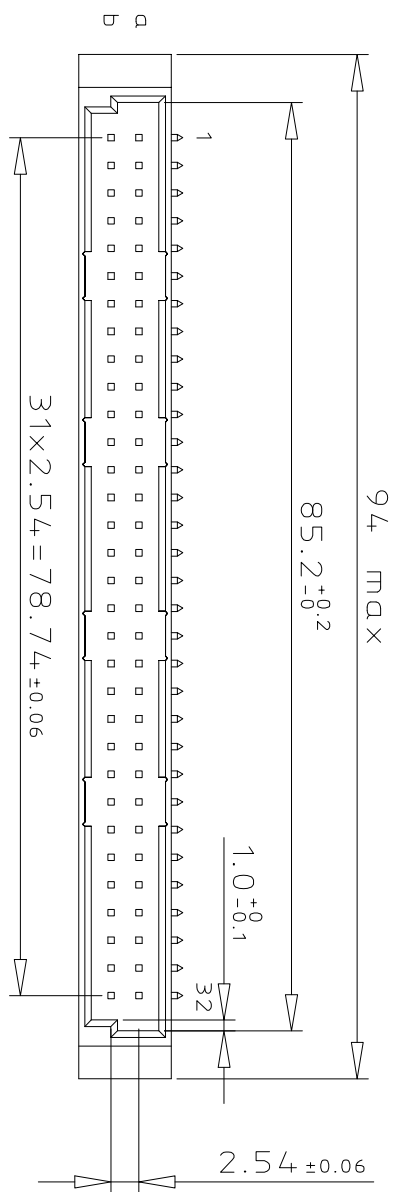



DIMENSIONS

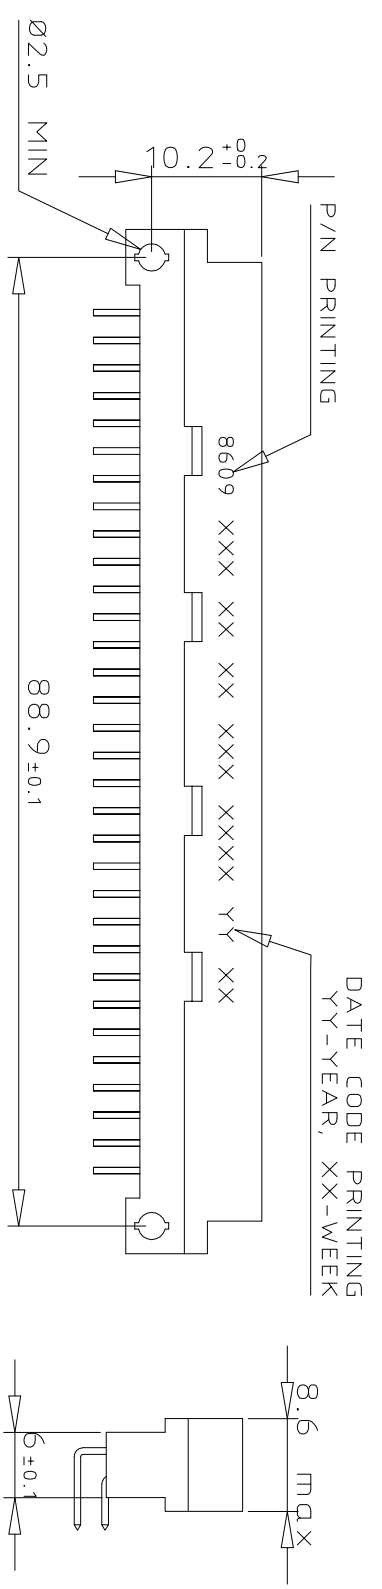

TERMINATION

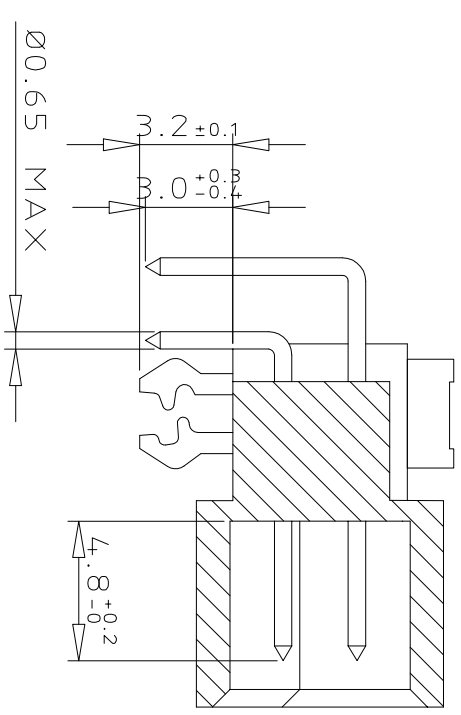

PCB LAYOUT

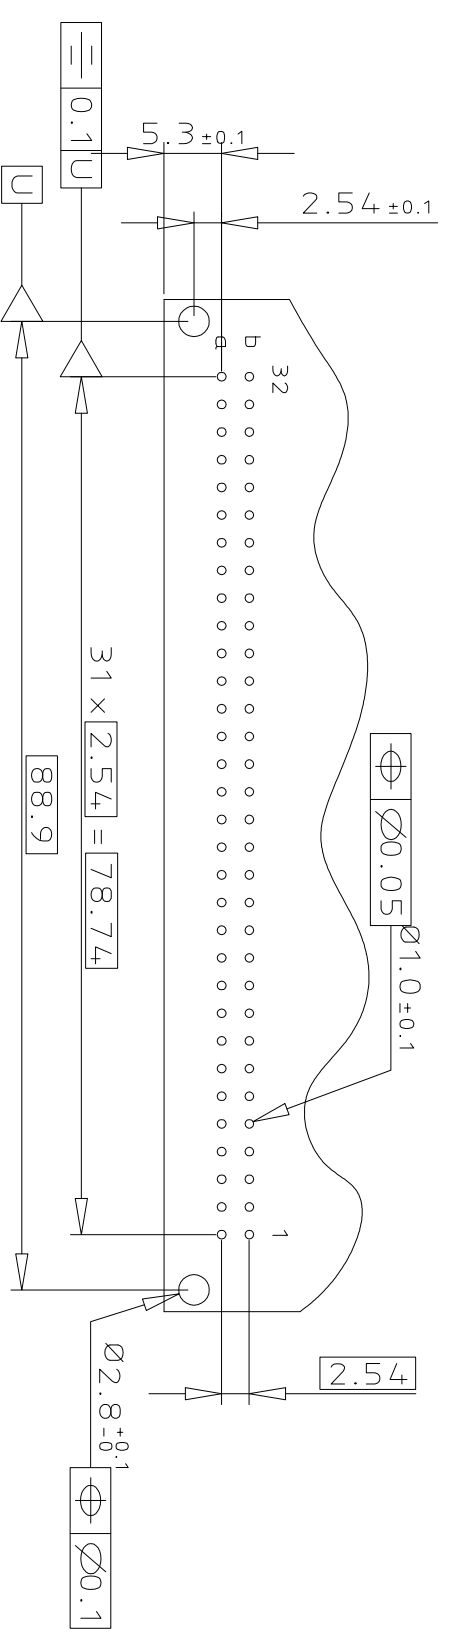

ORDERING INFORMATION

SERIES	8609	2	64	5	1	13	7	4	5	ELF
ROWS FITTED WITH CONTACTS	ROW a	-	-	-	-	-	-	-	-	1
ROW b	-	-	-	-	-	-	-	-	-	2
NO. OF CONTACTS	32									
TYPE OF INSULATOR	2 ROW MALE INSULATOR									
METHOD OF MOUNTING	STANDARD MOUNTING - STYLE B									
TERMINATION	ANGLED SPILL									
OPTIONS	NO OPTION WITH HARPOONS									
PERFORMANCE CLASS	DIN 41612 CLASS 3									
	DIN 41612 CLASS 2									
	DIN 41612 CLASS 1									
	AS PER MIL C 55302 / JSS 50808									
PITCH PER ROW	2.54 mm									
LEAD FREE VERSION	ELF									

GENERAL CHARACTERISTICS & ROHS INFO

REFER DRAWING C-8609-0000A

mat'l. code	SEE DWG C-8609-0000A		surface	ISO 1302	tolerance	ISO 406	ISO 1101	projection	product family	
tr	ecn	no	dr	date	angles	linear	0.X	±0.1	8609	
A	104-0063	MINI	2004-09-17	2004-09-17	0.XX	±0.1	0.XXX	±0.1	DIN STANDARD HEADER	
B	105-0089	MINI	2005-05-19	2005-05-19	0.XX	±0.1	0.XXX	±0.1	ANGLED SPILL DIN 41612 STYLE B	
C	106-0061	MINI	2006-05-31	0*2*	0.XXX	±0.1	SCOLE 3:2	FCI		
D	106-0164	MINI	2006-08-31	dr	MINI K V	2004-09-17	dwg no			
E	108-0146	KR	2008-10-21	engr	RAKHEE G	2004-09-17	sheet 1 of 1 size			
		chr	2008-10-21	engr	KESAVAN R	2008-10-21	C-8609-2008 A3			
		pppd	2008-10-21	engr	KESAVAN R	2008-10-21	type Product Customer Drawing			
sheet index	revision	sheet	1	1	1	1	1	1	1	1