


DIMENSIONS mm (inches)

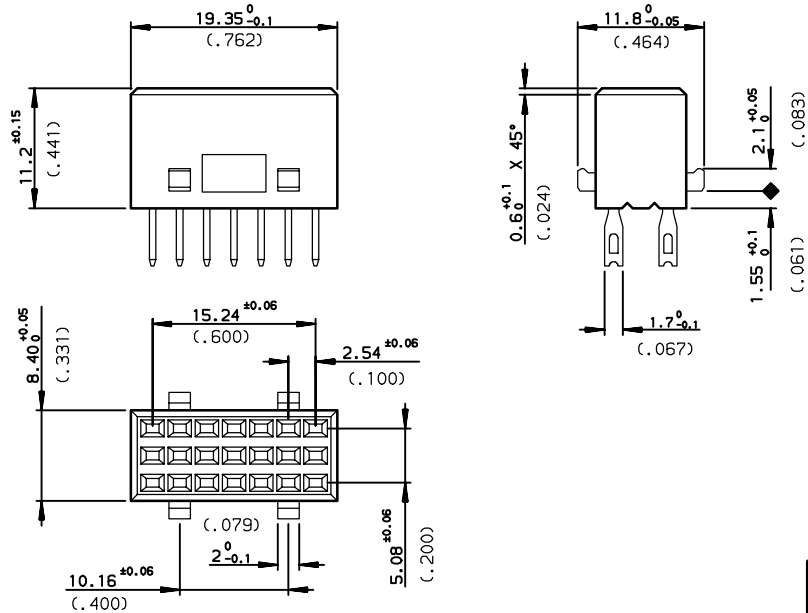

GENERAL CHARACTERISTICS AND ROHS INFORMATIONS:  
SEE DRAWING C-8609-0000B


PART NUMBER	8609			40		3		5	
PIN OUT									
rows a-b-c									
rows a-c									
NUMBER OF CONTACTS									
TERMINATION									
L1 = 5.7 ±0.3 (.224)									09
L2 = 13.7 ±0.3 (.539)									10
L1 and L2									08
PERFORMANCE CLASS									
DIN 41612 class 3									4
DIN 41612 class 2									6
DIN 41612 class 1									6
TERMINATION TYPE									
TIN LEAD									000E1
LEAD FREE									E1LF

TERMINATION

TYPE 09

TYPE 10

TYPE 08

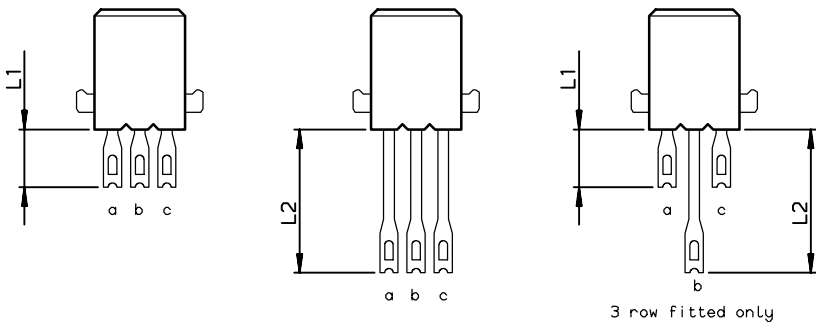

rev	ecn no	dr	date
B	-	ROU	2006/10/24
C	LS05-005	JTA	2005/03/17
D	LS06-0095	LGO	2006/06/22
-	-	-	-
-	-	-	-
-	-	-	-

www.fciconnect.com		surface ISO 1302	tolerance std ISO 406 ISO 1101	projection	mm
		TOLERANCES UNLESS OTHERWISE SPECIFIED			
Dr	ROUILLARD	1997/10/30	ANGULAR	size	Scale
Eng	TARON	1997/10/30	LINEAR	A3	2
Chr	LEGARE	1997/10/30	0.X ±0.1	ECN LS06-0095	
Appr	LEGARE	1997/10/30	0.XX ±0.1	Spec ref -	
		Product family		DIN 8609	
		DIN 8609		Spec ref -	
FCJ		FEMALE MODULE 21 CONTACTS		Rev.	
		SOLDER EYELET		D	
catalog no		-		C-8609-0658	
		-		CUSTOMER sheet 1 of 1	