


PHYSICAL DIMENSIONS:

A	8.68 [.342]	± 0.25 [.010]
A1	9.55 [.376]	MAX
B	5.60 [.220]	± 0.10 [.004]
C	2.85 [.112]	± 0.07 [.003]
C1	3.80 [.150]	± MAX.
E	2.84 [.112]	± 0.10 [.004]

WIRE DIMENSIONS:

T1	1.75 [.069]	± 0.25 [.010]
T2	0.81 [.032]	REF.
T3	0.43 [.017]	REF.



CM3421Y600R-10

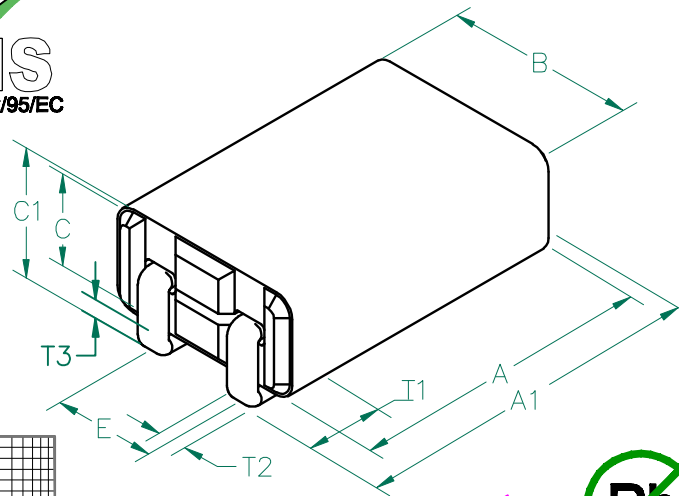

ELECTRICAL CHARACTERISTICS:			
	Z in (Ω) @ 100 MHz	DCR (Ω)	Rated Current (Continuous)
Nominal (Ref.)	60		
Minimum	45		
Maximum	-	.00075	15,000 mA




NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECS. 13" REELS, 2500 PCS PER REEL
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. REF.CARRIER TAPE SPECIFICATION CART3322-03
4. THIS PART HAS NO PIN POLARITY.
5. TERMINATION FINISH IS 100% TIN.

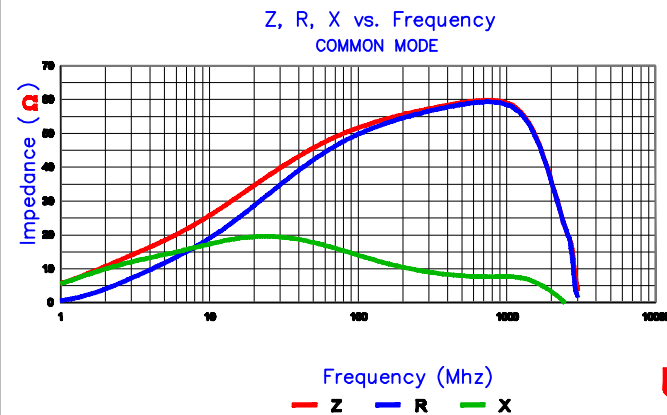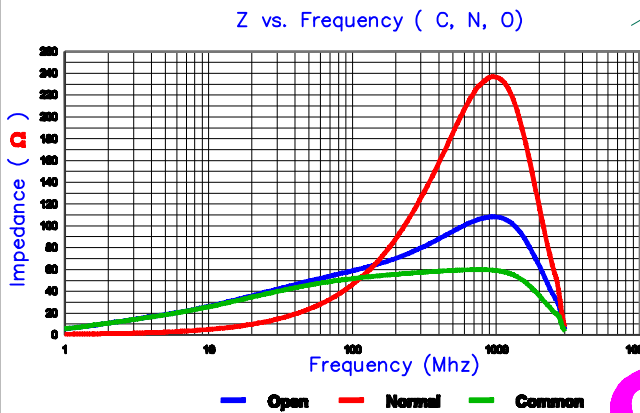

OBSOLETE

LAND PATTERN FOR REFLOW SOLDERING

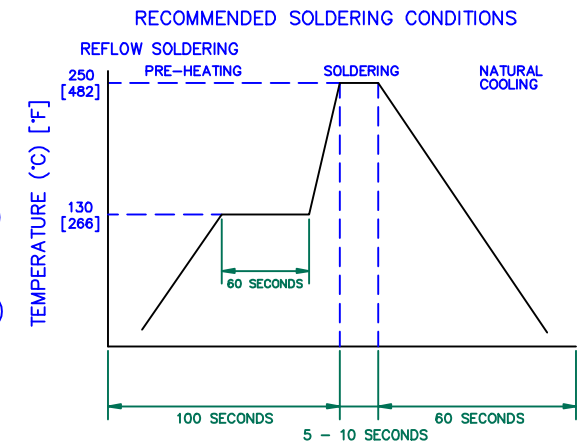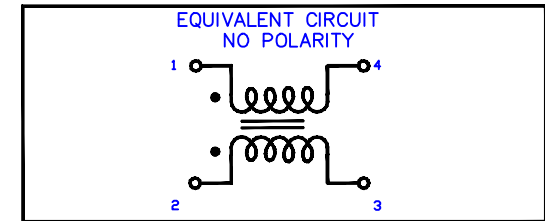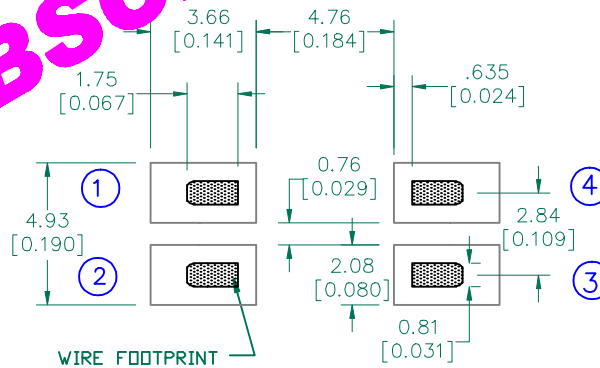

UNCONTROLLED DOCUMENT

DIMENSIONS ARE IN mm [INCHES].				This print is the property of Laird Tech. and is loaned in confidence subject to return upon request and with the understanding that no copies shall be made without the written consent of Laird Tech. All rights to design or invention are reserved.	
G	UPDATE COMPANY LOGO ADD T2 DIMENSION TO ISO VIEW	03/02/09	JRK		PROJECT/PART NUMBER: CM3421Y600R-10
F	UPDATE COMPANY LOGO	11/28/07	JRK		
E	INTERCHANGE DIMENSIONS A,B&C ADD EQUIVALENT CIRCUIT, REFLOW CHART	03/30/06	JRK		
D	UPDATE BOTH CURVES ADD NEW TEST REF #	02/02/06	JRK		
C	REMOVE REFLOW PATTERN ADD EQUIVALENT CIRCUIT DIAGRAM	11/17/05	JRK		
B	CHANGE TOLERANCE ON T1	11/01/05	JRK		
A	ORIGINAL DRAFT	07/27/05	JRK		
REV	DESCRIPTION	DATE	INT		
DATE: 07/27/05		SCALE: 7 : 1	SHEET: 2 of 3		
CAD # CM3421Y600R-10-G-2		TOOL # H0220			