
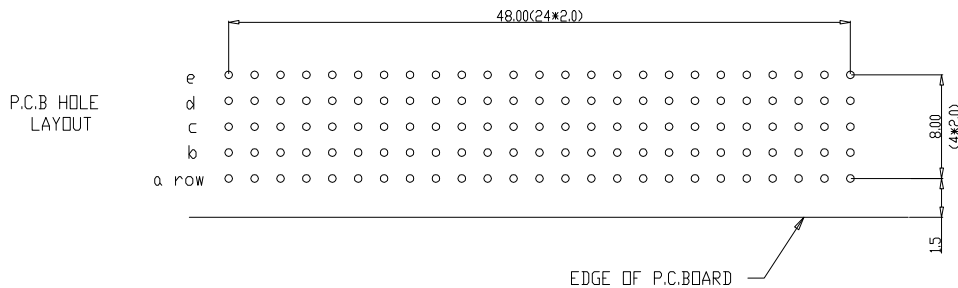


PERFORMANCE CHARACTERISTICS

- CURRENT RATING: 1.5 A AT 20°C (FULLY LOADED)
- 1 A AT 70°C (FULLY LOADED)
- RATED VOLTAGE: 500 V AC (CONT /CONT)
- OPERATING TEMPERATURE : -55°C TO 125°C
- CONTACT RESISTANCE : 20 m Ω MAX
- INSERTION FORCE: 0.75N MAX/CONT
- EXTRACTION FORCE : 0.15N MIN /CONT
- INSULATION RESISTANCE: 10<sup>4</sup> MΩ MIN

NOTES

- LEAD FREE INDICATOR :LF=LEAD FREE
- THIS PRODUCT IS CSA APPROVED.  
THIS PRODUCT IS UL RECOGNIZED.
- FOR RECOMMENDED PTH DIMENSIONS REFER DRAWING :BS.A.201572.001
- THIS PRODUCT (LF) MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008

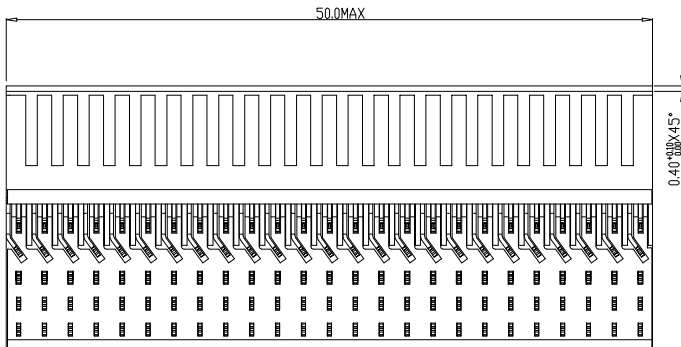

rev	ecn no	dr	date	Dr	10 2 92	J.V.B	Product family	size	Scale
A	CONVERSION REVISION 06	KN	14-9-01	Eng				A1	5.000
B	105-0093	MINI	17-06-05	Chr			Model Name	ECN	
C	DG05-0278	kason	02-08-05	Appr			Model Revision	REL Level	
D	DG06-0274	kason	05-07-06						
E	DG07-0362	kason	05/09/07						
06	BEC 9.3546	RM	11-06-01	Pro/E file	CAT.NO.	HM2R02PA5100----	CUSTOMER DRAWING	sheet 1 of 1	

This drawing is the property of the manufacturer. It is not to be reproduced, stored in a retrieval system, or transmitted in any form or by any means, electronic, mechanical, photocopying, recording, or by any information storage and retrieval system, without the prior written permission of the manufacturer.



All rights reserved. Reproduction or use of this drawing is prohibited without the prior written permission of the manufacturer.