#### VF/NPVF/VF-130

# Tedlar® colour coding tape and labels

This polyvinyl fluoride material is designed for use as a wire/cable marker, label and wrap-around, in the general aviation industry. The product is ideal for a variety of harsh chemical environments and where non-igniting/self-extinguishing properties are a necessity. It is available in several application-defined types and sizes and can be used with various printing technologies.

#### VF series

The VF series of Tedlar® products is specifically designed for wire/cable labeling. The product is dot matrix or thermal transfer printable and is available in several continuous and die-cut formats to fit a wide range of cables/cable bundles. The product meets all the requirements of the BMS 13-47, DMS 2359 and GAT100BA specifications, the benchmarks for pressure-sensitive wrap-around labels in the aerospace industry.

#### **NPVF Series**

The NPVF Tedlar® is a non-printable, 12.7mm ( $\frac{1}{2}$  in) wide and 30.48m (100 ft) long continuous tape designed for use as a colour-coded identifier for cables/cable bundles. Besides identifying the bundle this product is wrapped around, it also provides strength and rigidity to the bundle. The product has all the features of the VF series of Tedlar® products except for printability.

#### VF-130 Series

The VF-130 series is a range of clear non-printable Tedlar® tapes designed for use as an over laminate on wires/bundle identifiers where additional UV protection is required. These tapes can be used over various types of identifiers like wrap around labels, heat-shrink labels, tie-on cable labels and pressure-sensitive markers.

#### **Features and benefits**

- Resists water, oil, conventional cleaning agents, and oil based solvents.
- Filters UV light.
- Exhibits high degree of resistance to ageing.
- Meets the requirements of MIL-M-87958.
- Available in several colours to facilitate colour-coding and clear for over laminating.







# Temperature rating

Operating temperature range

 VF and NPVF
 -40°C to +130°C
 -40°F to +266°F

 VF-130
 -40°C to +105°C
 -40°F to +221°F

#### Specifications/approvals

Military MIL-M-87958
DMS 2359
Industry BMS-13-47

BACT 19 GAT100BA

#### Printer information


Tyco ribbon

Tyco printer AM6310 (dot matrix)

T series printers (thermal transfer\*)
\*Size dependent. Contact Tyco.
1892BK01 (dot matrix)


1330-3300-XX (thermal transfer\*)
\*Size dependent. Contact Tyco.

#### Part numbering system (Continuous)



#### Part numbering system (Die-Cut)



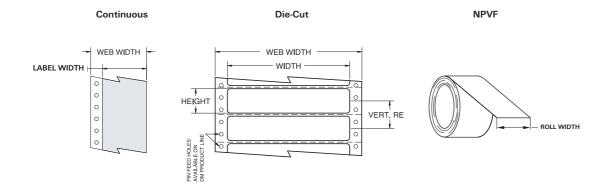

#### Polyvinyl Fluoride VF Tedlar® – Continuous Labels

| Ordering                                    | Printer | Labe   | l width | Labell | ength | Quantity   |
|---|---------|--------|---------|--------|-------|------------|
| description                                 | type    | mm     | inches  | M      | FT    | per pack   |
| <format>VF050<colour>-180</colour></format> | DM/TT   | 12.70  | 0.500   | 54.86  | 180   | Continuous |
| <format>VF075<colour>-100</colour></format> | DM/TT   | 19.05  | 0.750   | 30.48  | 100   | Continuous |
| <format>VF100<colour>-100</colour></format> | DM/TT   | 25.40  | 1.000   | 30.48  | 100   | Continuous |
| <format>VF150<colour>-100</colour></format> | DM/TT   | 38.10  | 1.500   | 30.48  | 100   | Continuous |
| <format>VF200<colour>-100</colour></format> | DM/TT   | 50.80  | 2.000   | 30.48  | 100   | Continuous |
| <format>VF300<colour>-100</colour></format> | DM/TT   | 76.20  | 3.000   | 30.48  | 100   | Continuous |
| <format>VF400<colour>-100</colour></format> | DM/TT   | 101.60 | 4.000   | 30.48  | 100   | Continuous |

#### Polyvinyl Fluoride VF Tedlar® - Die-Cut Labels

| Ordering                                      | Printer | Labe   | l width | Label I | neight | Quantity |
|---|---------|--------|---------|---------|--------|----------|
| description                                   | type    | mm     | inches  | M       | FT     | per pack |
| <format>VF1029<colour>-2.5</colour></format>  | DM/TT   | 25.40  | 1.000   | 73.66   | 2.900  | 2500     |
| <format>VF1079<colour>-1</colour></format>    | DM/TT   | 25.40  | 1.000   | 200.66  | 7.900  | 1000     |
| <format>VF1529<colour>-2.5</colour></format>  | DM/TT   | 38.10  | 1.500   | 73.66   | 2.900  | 2500     |
| <format>VF1679<colour>-1</colour></format>    | DM/TT   | 40.64  | 1.600   | 200.66  | 7.900  | 1000     |
| <format>VF3015<colour>-1</colour></format>    | DM/TT   | 76.20  | 3.000   | 38.10   | 1.500  | 1000     |
| <format>VF3509<colour>-2.5</colour></format>  | DM/TT   | 88.90  | 3.500   | 22.86   | 0.900  | 2500     |
| <format>VF6004<colour> -2.5</colour></format> | DM/TT   | 152.40 | 6.000   | 10.16   | 0.400  | 2500     |

## Options

| Format  | (TT) Therm | (TT) Thermal transfer printable |     |      |       |        |      |  |  |  |
|---------|------------|---------------------------------|-----|------|-------|--------|------|--|--|--|
|         | (DM) Dot i | (DM) Dot matrix printable       |     |      |       |        |      |  |  |  |
| Colours | Yellow     | White                           | Red | Blue | Green | Violet | Pink |  |  |  |
| Code    | YW         | WE                              | RD  | BE   | GN    | VT     | PK   |  |  |  |

#### Polyvinyl Fluoride NPVF Tedlar® – Colour coding tape

| Ordering      | Printer | Roll width         | Label length     | Quantity   |
|---------------|---------|--------------------|------------------|------------|
| description   | type    | mm inches          | M FT             | per pack   |
| NPVF050XX-100 | N/A     | 12.70 <i>0.500</i> | 30.48 <i>100</i> | Continuous |

## Options

| Colours | Yellow | White | Red | Blue | Green | Violet | Pink | Black | Brown | Orange | Grey | Gold |
|---------|--------|-------|-----|------|-------|--------|------|-------|-------|--------|------|------|
| Code    | YW     | WE    | RD  | BE   | GN    | VT     | PK   | BK    | BN    | OE     | GY   | GD   |

### Polyvinyl Fluoride VF-130 Tedlar® – Over laminate tapes

| Ordering      | Printer |        | Label width |        | Label | length | Quantity   |
|---------------|---------|--------|-------------|--------|-------|--------|------------|
| description   | type    | Colour | mm          | inches | M     | FT     | per pack   |
| NPVF150CL-100 | N/A     | Clear  | 38.10       | 1.500  | 30.48 | 100    | Continuous |
| NPVF200CL-100 | N/A     | Clear  | 50.80       | 2.000  | 30.48 | 100    | Continuous |
| NPVF300CL-100 | N/A     | Clear  | 76.20       | 3.000  | 30.48 | 100    | Continuous |
| NPVF400CL-100 | N/A     | Clear  | 101.60      | 4.000  | 30.48 | 100    | Continuous |