

NEMA line outlet 5-15R, snap-in mounting, front side, IDC-/quick connect terminals



Snap-In Version



### Description

- Panel Mount:  
Snap-in, Front-Side
- 1 Function:  
Line Outlet Protection class I
- Quick connect terminals or wires

### Approvals

- UL License Number: E132269
- CSA License Number: 73690

### Characteristics

- Designed for standard applications

### Weblinks


[Approvals](#), [RoHS](#), [CHINA-RoHS](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#)

### Technical Data

Ratings IEC	15 A / 250 VAC; Hz
Ratings UL/CSA	15 A / 125 VAC; 60 Hz
Allowable Operation Temp.	-25 °C to +85 °C
Degree of Protection	from front side IP 20 acc. to IEC 60529
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140
Terminal	Quick-Connect or Wire (solid)
Panel Thickness s	Snap-in 0.8 mm to 2 mm
Material: Housing	Thermoplastic, black


### Dimensions

Length 27 mm

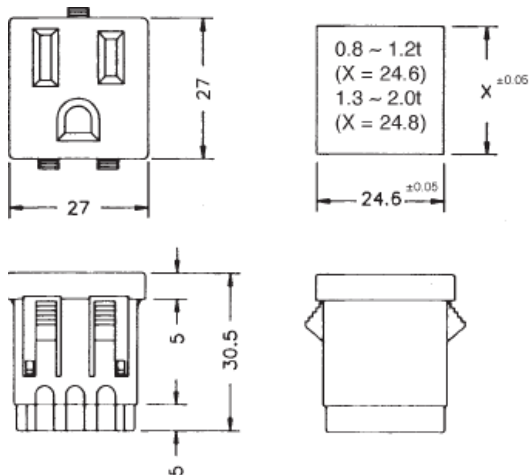


Panel thickness	X
0.8 - 1.2 mm	24.6 mm
1.3 - 2.0 mm	24.8 mm

## Mounting instructions

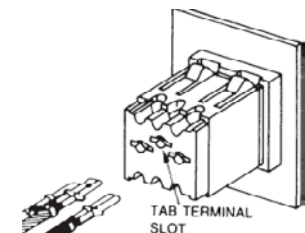

Quick connect mounting (5.2mm x 0.5mm)



Solid Wire connection (12-14AWG)

## Variants

[Distributor-Stock-Check](#) | [SCHURTER-Stock-Check](#) | [e-Store](#)

Type	Protection Class	Panel mounting	Panel Thicknesses [mm]	Terminal	Order Number
0710	I	Snap-in	0.8 -	Quick connect terminals or wires	4300.0703

**Packaging unit** 50 Pcs