


Plug Coupler IEC C20 / IEC J, Screw-on Mounting



Rear side

**Description**

- Panel Mount:
Screw-on mounting from front or rear-side
- Appliance Inlet, Pin temperature 70 °C, Protection class I

Approvals

- UL File Number: E96454


References**Weblinks**

[General Product Information](#), [Approvals](#), [RoHS](#), [CHINA-RoHS](#), [Mating Connectors](#), [e-Store](#), [SCHURTER-Stock-Check](#), [Distributor-Stock-Check](#), [Accessories](#)

Technical Data

| | |
|---------------------------|---|
| Ratings IEC | 16A / 250VAC; 50Hz |
| Ratings UL/CSA | 20A / 125VAC; 60Hz |
| Dielectric Strength | > 4 kVAC between L-N |
| | > 6 kVAC between L/N-PE (1 min/50Hz) |
| Allowable Operation Temp. | -25 °C to 70 °C |
| Degree of Protection | from front side IP 40 acc. to IEC 60529 |
| | from rear-side IP 40 acc. to IEC 60529 |
| Protection Class | Suitable for appliances with protection class 1 acc. to IEC 61140 |
| Panel Thickness s | Screw: |
| | Mounting screw torque max 0.5Nm |
| Material: Housing | Thermoplastic, black, UL 94V-0 |

| | |
|------------------------------------|---|
| Appliance Inlet / Appliance Outlet | C20 acc. to IEC/EN 60320-1 UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 16A, Protection Class 1 |
|------------------------------------|---|

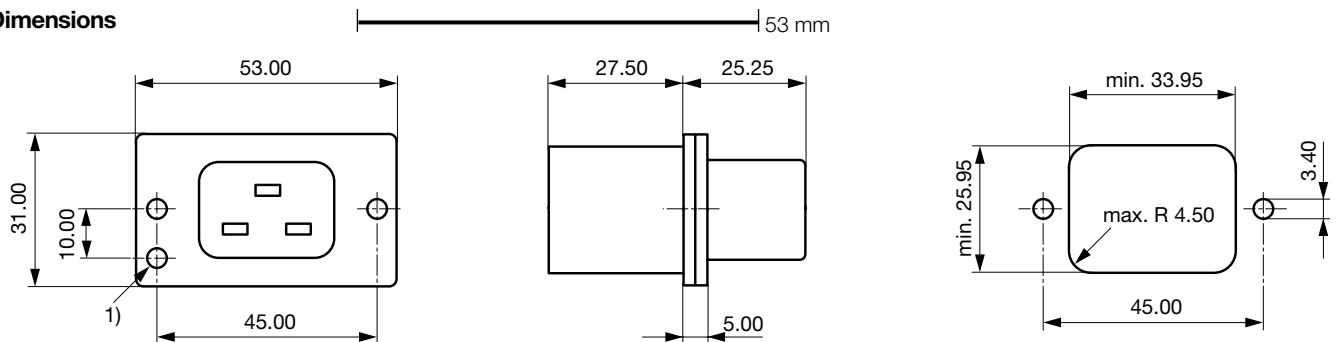Dimensions

1) Orientation hole

Variants

| Panel mounting | Panel Thickness s [mm] | Order Number |
|----------------|------------------------|--------------|
| Screw | 8 | 4730.0100 |

Packaging unit 100 Pcs

Mating Inlets/Plugs

Category / Description

[PlugOverview complete](#)



| | |
|---|------|
| IEC Plug I, Cord Connector (Rewireable), Straight | 0106 |
| IEC Plug I, Cord Connector (Rewireable), Straight | 0922 |
| IEC Plug I, Cord Connector (Rewireable), Angled | 1611 |
| IEC Plug I, Cord Connector (Rewireable), Straight | 1612 |
| IEC Plug I, Cord Connector (Rewireable), Angled | 4789 |
| Plugfurther types to4730 | ... |

Mating Outlets/Connectors

[ConnectorOverview complete](#)



| | |
|---|------|
| IEC Connector C19, Rewireable, Straight | 0104 |
| IEC Connector C19, Rewireable, Angled | 1651 |
| IEC Connector C19, Rewireable, Straight | 1652 |
| IEC Connector C19, Rewireable, Angled | 4790 |
| IEC Connector C19, Rewireable, Straight | 4795 |

[Connectorfurther types to4730](#)



[Power CordOverview complete](#)

| | |
|---|------|
| Power Cord with IEC Connector C19, Straight | 1654 |
|---|------|

[Power Cordfurther types to4730](#)



[Power Supply or Interconnection CordOverview complete](#)

| | |
|--|-----------|
| Divers Power Supply and Interconnection Cords 10 A | 4300.0920 |
| Divers Power Supply and Interconnection Cords 16 A | 6009.5195 |

[Power Supply or Interconnection Cordfurther types to4730](#)