

IEC plug connector I, rewireable, straight



4796



Description

- Rewireable plug:
Screw-on
- Inlet, Pin temperature 70 °C, Protection class I
- Cable

Approvals

- VDE License Number: 40009212
- UL License Number: E96454
- CSA License Number: 205419


Technical Data

Ratings IEC	16 A / 250 VAC; 50 Hz	Appliance-Inlet/-Outlet	I acc. to IEC/EN 60320-2-2, UL 498, CSA C22.2 no. 42 (for cold conditions) pin-temperature 70 °C, 16A, Protection class I
Ratings UL/CSA	21 A / 250 VAC; 60 Hz		
Dielectric Strength	> 2 kVAC between L-N > 2 kVAC between L/N-PE (1 min/50 Hz)		
Allowable Operation Temp.	-25 °C to 70 °C		
Protection Class	Suitable for appliances with protection class I acc. to IEC 61140		
Terminal	Cable		
Material: Housing	Thermoplastic, black, UL 94V-0		

Dimensions

4796

Length |-----| 33.3 mm

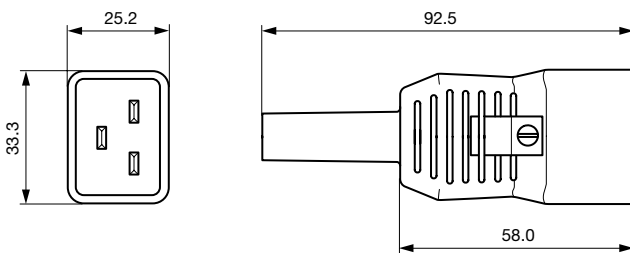

Variants

Color	Max. cable diameter	Max. wire size	Order Number
black	10.0 mm	3 x 2.1 mm ² / 3 x 14 AWG	4796.0000

Max. torque for screws: Terminal: 0.5 Nm, Cable clamp: 0.3 Nm, Cover: 0.3 Nm

Cord retaining clamp see accessories

Packaging unit 100 Pcs