
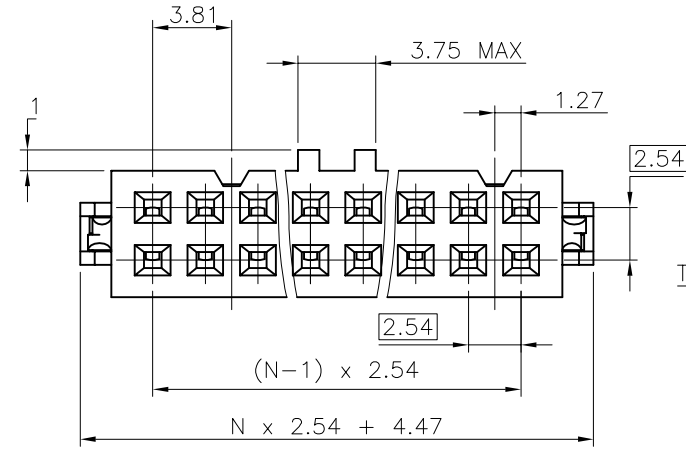
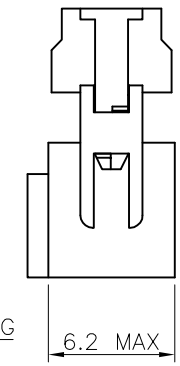


PRODUCT NUMBER


71600-YXXLF

- LEAD FREE, SEE NOTE 6
- TOTAL NB OF POSITION 04 TO 64  
SEE SHEET 2
- OPTIONAL STRAIN RELIEF  
SEE SHEET 2

TRIANGLE INDICATES  
POSITION 1  
NOTE 5

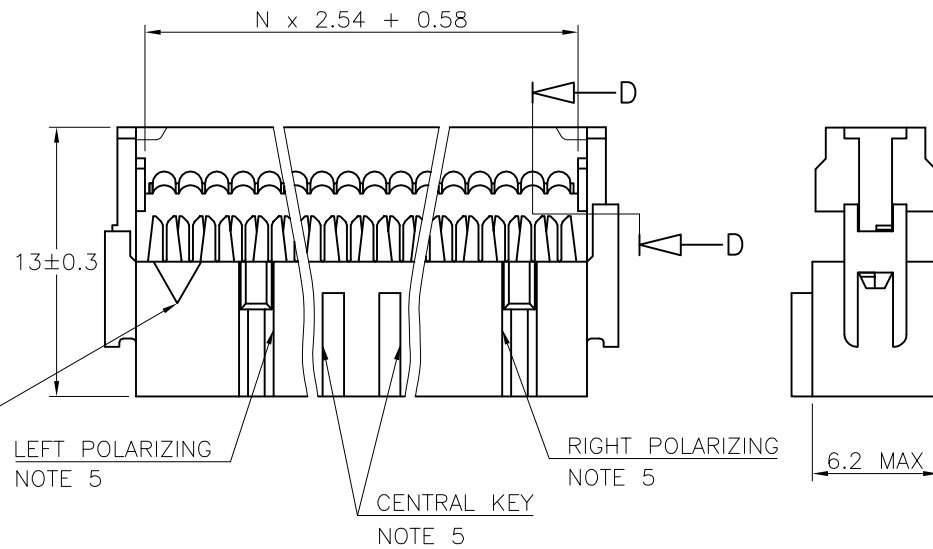

COVER ORIENTATION

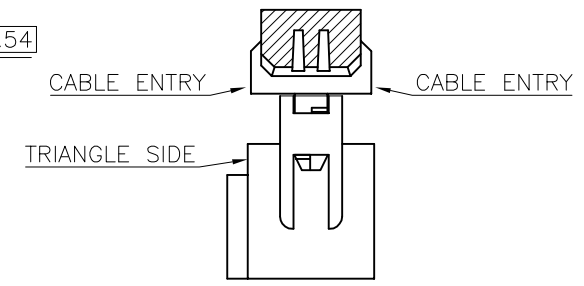

D. D. SECTION

NOTES:

- 1 - PLASTIC MAT'L : GLASS FILLED HIGH TEMPERATURE THERMOPLASTIC. UL94V-0 COLOR: GREY
- 2 - PIN MATERIAL : PHOSPHOR BRONZE
- 3 - PRODUCT PACKAGED IN TUBES.
- 4 - TO DETERMINE DIMENSIONS :  
N = NUMBER OF POSITIONS  
EXAMPLE : 8 POS N x 2.54 = 20.32mm
- 5 - 2x5, 2x6, 2x7 HAVE NO LEFT POLARIZING SLOT.  
- 2x2, 2x3 WITH CENTRAL KEY HAVE NO TRIANGLE, NO LEFT AND RIGHT POLARIZING SLOT.  
- 2x2 WITHOUT CENTRAL KEY HAS NO LEFT AND RIGHT POLARIZING SLOT.  
- 2x3, 2x4 WITHOUT CENTRAL KEY HAVE NO LEFT POLARIZING SLOT  
- 2x4 WITH CENTRAL KEY HAVE NO LEFT AND RIGHT POLARIZING SLOT
- 6 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS PER GS-22-008.  
PACKAGING SPECIFICATION AS PER GS-14-920.

mat'l. code SEE NOTES		surface ISO 1302	tolerance ISO 406 ISO 1101	projection	product family 2.54MM IDC	
ltr	ecn no	dr	date	tolerances unless otherwise specified	title	
AG	F04-0330	LMU	04.09.01	angles	QUICKIE III FEM 0.76µm Au	
AH	F05-0109	JCO	05.01.17	linear		
AJ	F05-0171	LMU	05.04.07		scale 5:1	
AK	F05-0180	LMU	05.04.22	dr	D.LE	01.01.24
AL	F06-0270	LMU	06.09.12	engr	P.NZ	01.01.24
AM	F06-0274	LMU	06.09.25	chr	JF.N	01.01.24
AN	F09-0233	LMU	09.12.15	appd	P.NZ	01.01.24
sheet index	revision sheet	AN	AE			
		1	2			



Copyright FCI


CORE RANGE	
STRAIN RELIEF	Nbr OF POSITIONS
0/1	04
0/1	06
0/1	08
0/1	10
0/1	14
0/1	16
0/1	18
0/1	20
0/1	24
0/1	26
0/1	30
0/1	34
0/1	40
0/1	50
0/1	60
0/1	64

PLATING  
0.76µm GOLD ON CONTACT AREA  
1.27 µm Ni REMAINDER OF PRODUCT


CATALOGUE RANGE	
STRAIN RELIEF	Nbr OF POSITIONS
2/6	04
2/6	06
2/6	08
2/6	10
2/6	14
2/6	16
2/6	18
2/6	20
2/6	24
2/6	26
2/6	30
2/6	34
2/6	40
2/6	50
2/6	60
2/6	64

PLATING  
0.76µm GOLD ON CONTACT AREA  
1.27 µm Ni REMAINDER OF PRODUCT


624
304
204 / 224
004
DASHES NOT AVAILABLE




WITHOUT STRAIN RELIEF

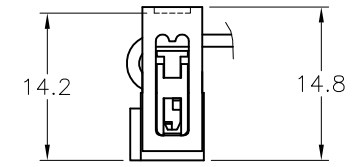


WITH LOW PROFILE STRAIN RELIEF

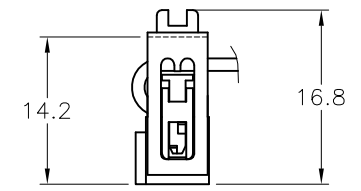


WITH STANDARD STRAIN RELIEF

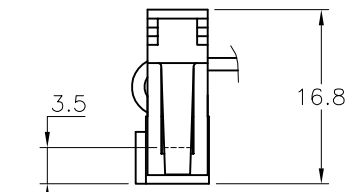


WITH LATCHING STRAIN RELIEF



LOW PROFILE STRAIN RELIEF



STANDARD STRAIN RELIEF

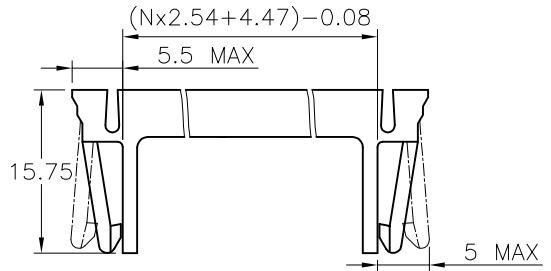

LATCHING STRAIN RELIEF FOR SLIM HEADER

PRODUCT NUMBER	CENTRAL KEY		STRAIN RELIEF			
	WITH	WITHOUT	STANDARD	WITHOUT	LOW PROFILE	LATCHING
71600-6YYLF	●					●
71600-3YYLF		●	●			
71600-2YYLF	●				●	
71600-1YYLF	●			●		
71600-0YYLF	●		●			

mat'l. code		surface ISO 1302		tolerance ISO 406 ISO 1101		projection		product family QUICKIE	
ltr	ecn no	dr	date	tolerances unless otherwise specified		mm		title IDC RECEPT DR	
X	F70666	AAN	97.11.05	angles	linear	scale N/A		sheet 2 of - size A3	
Y	F10121	DLE	01.01.24					71600	
AA	F10199	GCO	01.04.26					CUSTOMER Drawing	
AB	F03019	DLE	03.01.23	dr	D.LE	01.01.24			
AC	F05-0180	LMU	05.04.22	engr	P.NZ	01.01.24			
AD	F06-0270	LMU	06.09.12	chr	JF.N	01.01.24			
AE	F06-0274	LMU	06.09.25	appd	P.NZ	01.01.24			
sheet index	revision sheet								

Copyright FCI  
 FCIconnect.com