




- **Accepts GSM Standard 11.11 cards.**
- **Secure locking latch mechanism.**
- **Robust, good resistance against shock and vibration.**
- **SIM Installed Height – 1.50mm**
- **Polarized to eliminate improper insertion of the card.**

KEY FEATURES AND BENEFITS

- SMT with locking hinged guide.
- 2.50mm connector height.
- Selective gold on mating surface tin on solder tails.
- Tape and reel packaging

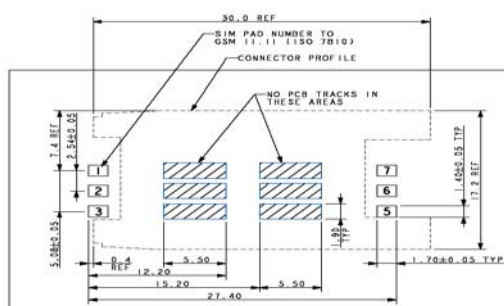

Board Layout

