
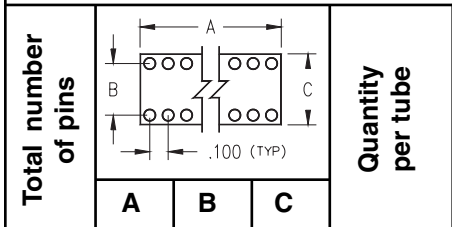


- Special lock-down feature prevents floating of socket during soldering. Open insulator with ladder construction.
- Sockets are XY stackable.
- Socket pins feature closed end construction eliminating any solder wicking problems.
- Series 101 use MM #1001 & MM #0156 pins. See page 136 for details.
- Insulators are high temperature thermoplastic.

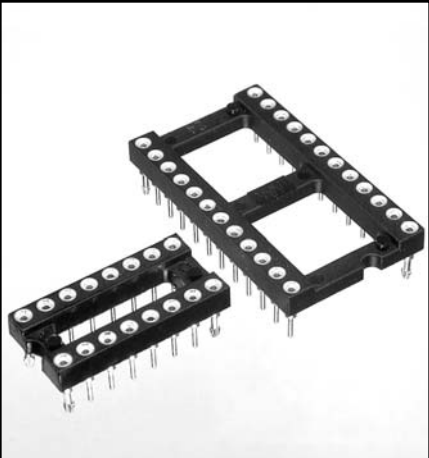

Ordering Information

Total number of pins	Pin Configuration			Quantity per tube
	A	B	C	
6	0.3	0.3	0.4	67
8	0.4	0.3	0.4	50
14	0.7	0.3	0.4	28
16	0.8	0.3	0.4	25
18	0.9	0.3	0.4	22
20	1.0	0.3	0.4	20
24	1.2	0.3	0.4	16
28	1.4	0.3	0.4	14
22	1.1	0.4	0.5	18
24	1.2	0.6	0.7	16
28	1.4	0.6	0.7	14
32	1.6	0.6	0.7	12
40	2.0	0.6	0.7	10
48	2.4	0.6	0.7	8
64	3.2	0.9	1.0	6

101-93-306-41-56X000
 101-93-308-41-56X000
 101-93-314-41-56X000
 101-93-316-41-56X000
 101-93-318-41-56X000
 101-93-320-41-56X000
 101-93-324-41-56X000
 101-93-328-41-56X000

 101-93-422-41-56X000

 101-93-624-41-56X000
 101-93-628-41-56X000
 101-93-632-41-56X000
 101-93-640-41-56X000
 101-93-648-41-56X000

 101-93-964-41-56X000

Clinch Pins: ↑
 Two Opposite Corner Pins **X = 0**
 Four Corner Pins **X = 8**

For Electrical,
Mechanical & Environmental
Data, See pg. 4

RoHS
2002/95/EC

For RoHS compliance
select ◇ plating code.

PLATING CODE =		93			
Sleeve (Pin)		200μ" Sn/Pb			
Contact (Clip)		30μ" Au			