
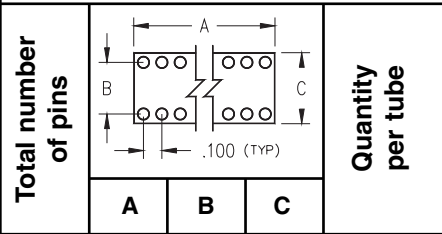


- High temperature thermo-plastic insulator with standoffs is compatible with standard automatic insertion equipment.
- Soft copper alloy machined pins allows clinching. Chamfered contact entry allows for ease of IC insertion without bent leads.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 218 for details.
- Series 110 use MM #1005 pins. See page 137 for details.

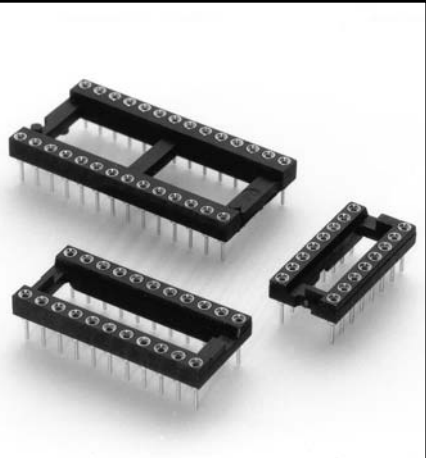

Ordering Information

Total number of pins	Pin Layout Dimensions			Quantity per tube
	A	B	C	
6	0.3	0.3	0.4	67
8	0.4	0.3	0.4	50
14	0.7	0.3	0.4	28
16	0.8	0.3	0.4	25
18	0.9	0.3	0.4	22
20	1.0	0.3	0.4	20
24	1.2	0.3	0.4	16
22	1.1	0.4	0.5	18
24	1.2	0.6	0.7	16
28	1.4	0.6	0.7	14
32	1.6	0.6	0.7	12
40	2.0	0.6	0.7	10

110-XX-306-41-605000
110-XX-308-41-605000
110-XX-314-41-605000
110-XX-316-41-605000
110-XX-318-41-605000
110-XX-320-41-605000
110-XX-324-41-605000
110-XX-422-41-605000
110-XX-624-41-605000
110-XX-628-41-605000
110-XX-632-41-605000
110-XX-640-41-605000

RoHS
2002/95/EC

For RoHS compliance select ◇ plating code.

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

SPECIFY PLATING CODE XX=	93	43 ◇
Sleeve (Pin)	200μ" Sn/Pb	200μ" Sn
Contact (Clip)	30μ" Au	30μ" Au