


- Unique floating contacts compensate for the effects of unevenly dispensed solder paste.
- High temperature insulator can withstand infra-red reflow and vapor phase soldering.
- Hi-Rel, 4-finger BeCu #30 contact is rated at 3 amps. See page 208 for details.
- Series 114 use MM #1434 pins. See page 131 for details.

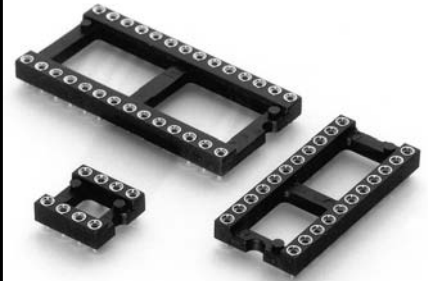

| Total number of pins |   |   |   | Quantity per tube | <b>Ordering Information</b> |  |
|----------------------|---|---|---|-------------------|-----------------------------|--|
|                      | A | B | C |                   |                             |  |

| Total number of pins | A   | B   | C   | Quantity per tube |                      |  |
|----------------------|-----|-----|-----|-------------------|----------------------|--|
| 10                   | 0.5 | 0.2 | 0.3 | 41                | 114-XX-210-41-117000 |  |
| 4                    | 0.2 | 0.3 | 0.4 | 100               | 114-XX-304-41-117000 |  |
| 6                    | 0.3 | 0.3 | 0.4 | 67                | 114-XX-306-41-117000 |  |
| 8                    | 0.4 | 0.3 | 0.4 | 50                | 114-XX-308-41-117000 |  |
| 10                   | 0.5 | 0.3 | 0.4 | 40                | 114-XX-310-41-117000 |  |
| 14                   | 0.7 | 0.3 | 0.4 | 28                | 114-XX-314-41-117000 |  |
| 16                   | 0.8 | 0.3 | 0.4 | 25                | 114-XX-316-41-117000 |  |
| 18                   | 0.9 | 0.3 | 0.4 | 22                | 114-XX-318-41-117000 |  |
| 20                   | 1.0 | 0.3 | 0.4 | 20                | 114-XX-320-41-117000 |  |
| 22                   | 1.1 | 0.3 | 0.4 | 18                | 114-XX-322-41-117000 |  |
| 24                   | 1.2 | 0.3 | 0.4 | 16                | 114-XX-324-41-117000 |  |
| 28                   | 1.4 | 0.3 | 0.4 | 14                | 114-XX-328-41-117000 |  |
| 20                   | 1.0 | 0.4 | 0.5 | 20                | 114-XX-420-41-117000 |  |
| 22                   | 1.1 | 0.4 | 0.5 | 18                | 114-XX-422-41-117000 |  |
| 24                   | 1.2 | 0.4 | 0.5 | 16                | 114-XX-424-41-117000 |  |
| 28                   | 1.4 | 0.4 | 0.5 | 14                | 114-XX-428-41-117000 |  |
| 32                   | 1.6 | 0.4 | 0.5 | 12                | 114-XX-432-41-117000 |  |
| 24                   | 1.2 | 0.6 | 0.7 | 16                | 114-XX-624-41-117000 |  |
| 28                   | 1.4 | 0.6 | 0.7 | 14                | 114-XX-628-41-117000 |  |
| 32                   | 1.6 | 0.6 | 0.7 | 12                | 114-XX-632-41-117000 |  |
| 36                   | 1.8 | 0.6 | 0.7 | 11                | 114-XX-636-41-117000 |  |
| 40                   | 2.0 | 0.6 | 0.7 | 10                | 114-XX-640-41-117000 |  |
| 42                   | 2.1 | 0.6 | 0.7 | 9                 | 114-XX-642-41-117000 |  |
| 48                   | 2.4 | 0.6 | 0.7 | 8                 | 114-XX-648-41-117000 |  |
| 50                   | 2.5 | 0.6 | 0.7 | 8                 | 114-XX-650-41-117000 |  |
| 52                   | 2.6 | 0.6 | 0.7 | 7                 | 114-XX-652-41-117000 |  |
| 50                   | 2.5 | 0.9 | 1.0 | 8                 | 114-XX-950-41-117000 |  |
| 52                   | 2.6 | 0.9 | 1.0 | 7                 | 114-XX-952-41-117000 |  |
| 64                   | 3.2 | 0.9 | 1.0 | 6                 | 114-XX-964-41-117000 |  |

**XX= Plating Code**  
**See Below**

For RoHS compliance  
 select ◇ plating code.

|                          |         |  |             |  |          |  |
|--------------------------|---------|--|-------------|--|----------|--|
| SPECIFY PLATING CODE XX= | 13◇     |  | 93          |  | 43◇      |  |
| Sleeve (Pin)             | 10μ" Au |  | 200μ" Sn/Pb |  | 200μ" Sn |  |
| Contact (Clip)           | 30μ" Au |  | 30μ" Au     |  | 30μ" Au  |  |