Extract from the online catalog

VS-15-SET-EMV

Order No.: 1689132

The illustration shows the version VS-09-SET-EMV

http://eshop.phoenixcontact.de/phoenix/treeViewClick.do?UID=1689132

D-SUB connector set, shell size 2, IP67 protection, with shrouds

Commercial data	
EAN	4017918877996
Pack	1 pcs.
Customs tariff	85366990
Weight/Piece	0.08385 KG
Catalog page information	Page 329 (PC-2009)

Product notes

WEEE/RoHS-compliant since: 06/20/2006

http://www.download.phoenixcontact.com
Please note that the data given here has been taken from the online catalog. For comprehensive information and data, please refer to the user documentation. The General Terms and Conditions of Use apply to Internet downloads.

Technical data

General characteristics

Design	15
Degree of protection	IP67
Inflammability class acc. to UL 94	V0
Cable exit	Angled
Housing material	PA

Seal material	Flat gasket: NBR; profile gasket: EPDM
Ambient temperature (operation)	-40 °C ... 80 °C

Diagrams/Drawings

Dimensioned drawing

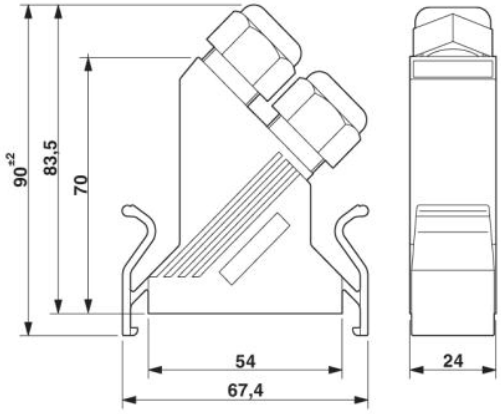

D-SUB sleeve housings

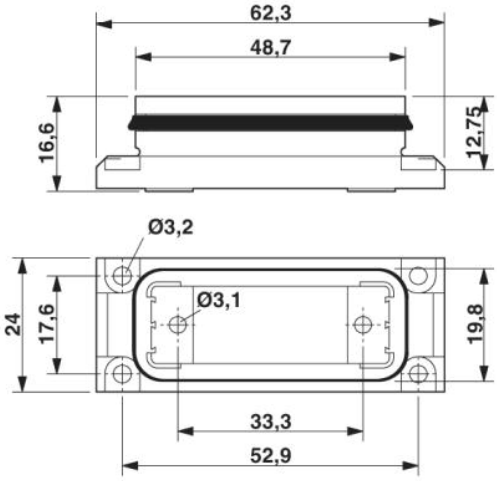

D-SUB panel mounting frame

Address

PHOENIX CONTACT Deutschland GmbH
Flachsmarktstr. 8
32825 Blomberg,Germany
Phone +49 5235 3 12000
Fax +49 5235 3 41200
http://www.phoenixcontact.de

© 2010 Phoenix Contact
Technical modifications reserved;