

FK3 MAXI™ Style Blade Fuse Rated 32V

RoHS


Specifications

DIN 72581/3E

SAE J 1888

ISO 8820-3

UL 248 Special Purpose Fuses

Insulating body: Out of thermoplastic (UL 94-V0, heat-resistant)**Cover:** Out of thermoplastic (V0, transparent),

Visible melting-element

Connections: Blade contacts

Copper alloy, gal. Sn

Edge-protected

Breaking capacity: 1,000 A, 32 V, DC











Standard DIN voltage drop form 80A: 100mV

The FK3 32V automotive standard fuse link in MAXI size. Three part construction with copper contacts for excellent reliability in harsh environment conditions with low voltage drop. Current ratings 20A thru 100A. With see-trough cover for easy detection of blown fuses.

Die FK1 32V-Standardsicherung in MAXI-Bauform. Merkmale sind dreiteiliger Aufbau mit Kupferkontakten, niedriger Spannungsabfall und hohe Zuverlässigkeit unter rauen Umgebungsbedingungen. Nennstrom 20A bis 100A, transparente Abdeckung zur leichten Erkennung durchgebrannter Sicherungen.

Time-Current Characteristics / Schmelzeit-Grenzwerte

% of Rating % des Nennstromes	Opening Time Min / Max (s) Schmelzcharakteristik Min / Max (s)
110	100 h / –
	100 h / –
135	60 s / 1,800 s
	– / –
200	2 s / 60 s
	2 s / 60 s
350	200 ms / 7 s
	200 ms / 7 s
600	40 ms / 1 s
	40 ms / 1 s

Part Number Artikel-Nr.	Current Rating Nennstrom	Housing Color Kennfarbe	Typ. Voltage Drop Typ. Spannungsfall		Cold Resistance Kaltwiderstand	I ² t
			Standard DIN max.	Littelfuse max.		
169.6885.520_	20 A		125 mV	95 mV	3.80 mΩ	1,900 A²s
169.6885.525_	25 A*		–	100 mV	2.80 mΩ	2,300 A²s
169.6885.530_	30 A		100 mV	80 mV	2.10 mΩ	6,000 A²s
169.6885.535_	35 A*		–	100 mV	1.70 mΩ	8,400 A²s
169.6885.540_	40 A		100 mV	85 mV	1.60 mΩ	12,000 A²s
169.6885.550_	50 A		100 mV	80 mV	1.20 mΩ	26,000 A²s
169.6885.560_	60 A		100 mV	85 mV	0.90 mΩ	45,000 A²s
169.6885.570_	70 A		100 mV	90 mV	0.80 mΩ	70,000 A²s
169.6885.580_	80 A		–	75 mV	0.72 mΩ	94,000 A²s
169.6885.610_	100 A*		–	95 mV	0.50 mΩ	140,000 A²s


* Not mentioned in the standards

Last figure of part number = packaging code, see Section "Packaging Index," pg. 157.


Corresponding holder see Section "Fuse Holders."

FK3 MAXI™ Style Blade Fuse Rated 32V

Dimensions in mm / Maße in mm

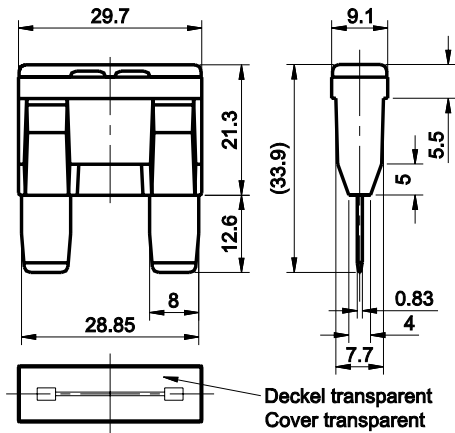

Pre-arcing Time - limits / Schmelzeit-Grenzwerte DIN

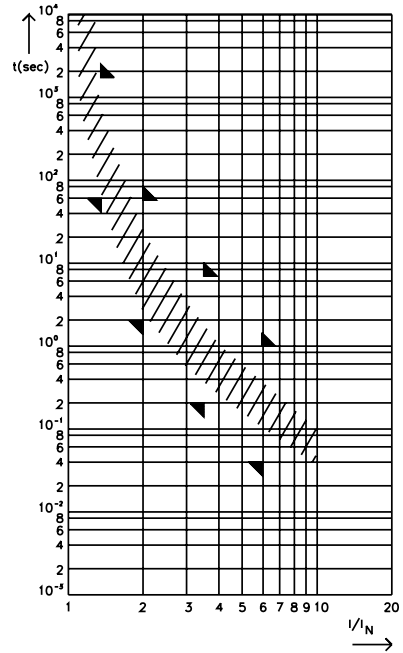

FI = 1.33 (max. operating current: $0.75 \times I_{rat}$ at 23°C)