

Fig. 1

- Series 334 Interconnect header strips are available in 5 lengths:
 - 334...020 uses pin #3402 (L = .190")
 - 334...010 uses pin #3401 (L = .236")
 - 334...050 uses pin #3405 (L = .315")
 - 334...000 uses pin #3400 (L = .606")
 - 334...100 uses pin #3410 (L = 1.070")
- See pages 182 for details.
- Strips come with .020" pluggable solder tails at one end and .030" tails at the other.
- Insulators are high temp. thermoplastic.

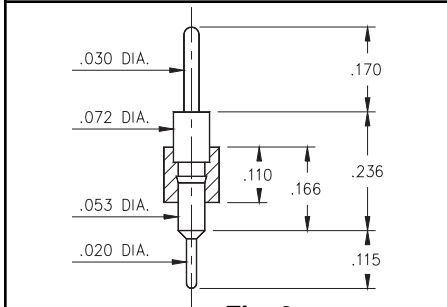


Fig. 2

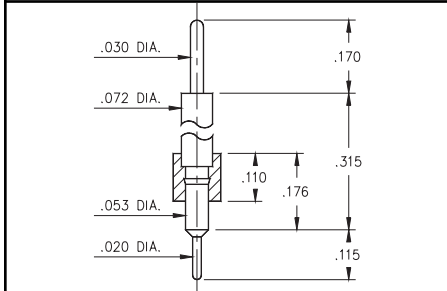


Fig. 3

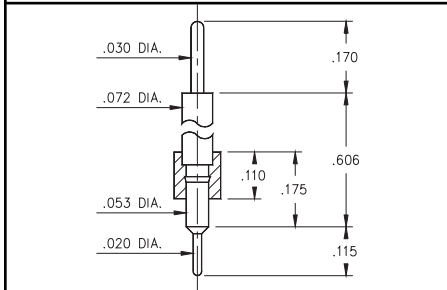


Fig. 4

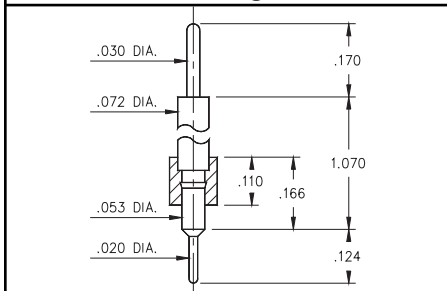


Fig. 5

Ordering Information

Fig. 1	Series 334...020 .020 / .030 Solder Tails
	334-XX-1__-00-020000 Specify # of pins → 01-64
Fig. 2	Series 334...010 .020 / .030 Solder Tails
	334-XX-1__-00-010000 Specify # of pins → 01-64
Fig. 3	Series 334...050 .020 / .030 Solder Tails
	334-XX-1__-00-050000 Specify # of pins → 01-64
Fig. 4	Series 334...000 .020 / .030 Solder Tails
	334-XX-1__-00-000000 Specify # of pins → 01-64
Fig. 5	Series 334...100 .020 / .030 Solder Tails
	334-XX-1__-00-100000 Specify # of pins → 01-64

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

For RoHS compliance select ◇ plating code.

SPECIFY PLATING CODE XX=	10◇	90	40◇	
Pin Plating	10μ" Au	200μ" Sn/Pb	200μ" Sn	