


- Series 442 Interconnect Header strips come in four heights with .018" dia. pluggable solder tails at both ends.
- 442...591 uses pin #4259-1 (L = .210")
- 442...592 uses pin #4259-2 (L = .335")
- 442...593 uses pin #4259-3 (L = .585")
- 442...594 uses pin #4259-4 (L = .835")
- See pages 179 for details.
- Insulators are high temp. thermoplastic.

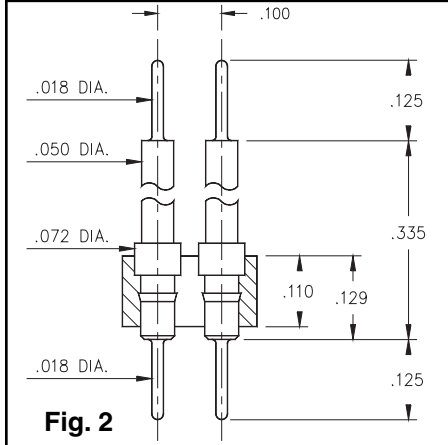



Ordering Information

Fig. 1	Series 442...591 .018 / .018 Interconnect
	442-XX-2__-00-591000 Specify # of pins → 02-64

Fig. 2	Series 442...592 .018 / .018 Interconnect
	442-XX-2__-00-592000 Specify # of pins → 02-64

Fig. 3	Series 442...593 .018 / .018 Interconnect
	442-XX-2__-00-593000 Specify # of pins → 02-64

Fig. 4	Series 442...594 .018 / .018 Interconnect
	442-XX-2__-00-594000 Specify # of pins → 02-64

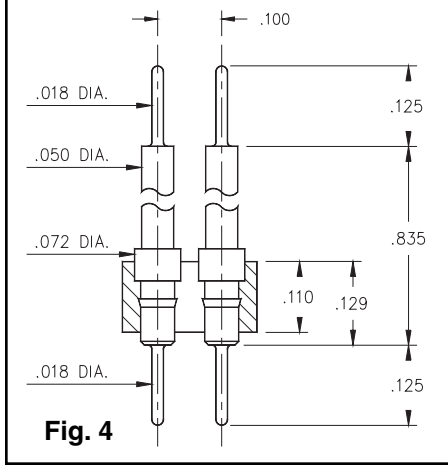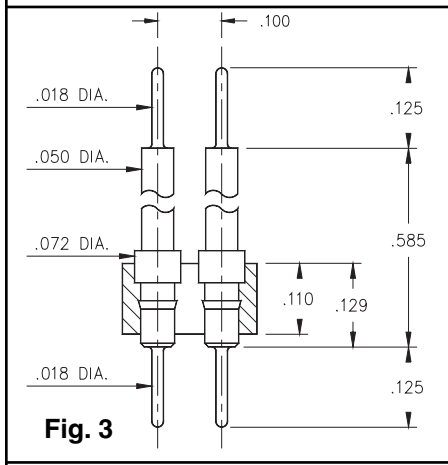

For Electrical, Mechanical & Environmental Data, See pg. 4

XX=Plating Code See Below

For RoHS compliance select \diamond plating code.

SPECIFY PLATING CODE XX=	10 \diamond	90	40 \diamond	
Pin Plating	10 μ " Au	200 μ " Sn/Pb	200 μ " Sn	