

TEST JACKS



Designers' Choice



VERTICAL PC TEST JACK

ACCEPTS .080" TIP

This low profile vertical jack allows dense packaging where space is limited. Mounts into a .052" diameter hole. Provides easy access and positive electrical contact. The contact is recessed to prevent accidental shorting. Capacitance between two adjacent jacks less than 1.0 pF at 1 MHz. Operating voltage is 1500 Volts RMS. Current rating 5 Amps max.

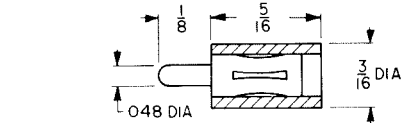

ACTUAL SIZE

MATERIAL

Body: Nylon per ASTM D4066
Contact: Brass, Silver Plate

SELECTION OF COLORS




| CAT. NO. | COLOR |
|----------|--------|
| 6036 | WHITE |
| 6037 | RED |
| 6038 | BLACK |
| 6039 | YELLOW |
| 6040 | GREEN |
| 6041 | BLUE |

SNAP-IN VERTICAL PC TEST JACK

ACCEPTS .080" TIP

Low cost, compact and dependable snap-in vertical test jack features a unique spring shank which retains the jack throughout wave soldering procedure. Ideal for use on circuit boards of audio, digital and R.F. circuitry. Contact recessed to prevent accidental shorting. Current rating: 5 Amps. Operating voltage 1500 Volts RMS. Capacitance between two adjacent jacks less than 1.0 pF at 1 MHz.

MOUNTING: Snap-fits into .052 hole

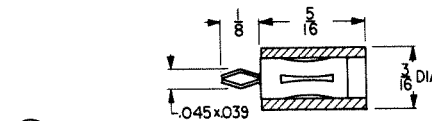

ACTUAL SIZE

MATERIAL

Body: Nylon per ASTM D4066
Contact: Beryllium Copper, Silver Plate



SELECTION OF COLORS

| CAT. NO. | COLOR |
|----------|--------|
| 6042 | WHITE |
| 6043 | RED |
| 6044 | BLACK |
| 6045 | YELLOW |
| 6046 | GREEN |
| 6047 | BLUE |

MINIATURE HORIZONTAL PC TEST JACK

ACCEPTS .080" TIP

Space saver test jack designed for use where space is a limiting factor. Half the size of standard jacks. Accepts .080" tip plug in either end. Mounts on .200" centers in .052" holes. Can be spaced side by side on .160" centers minimum. Two common terminals. Current: 5 Amps. Breakdown voltage: 2100 VRMS, Capacitance 1.0 pF maximum.

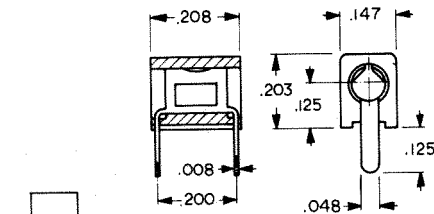

ACTUAL SIZE

MATERIAL

Body: Nylon per ASTM D4066
Contact: Beryllium Copper Silver Plate




SELECTION OF COLORS

| CAT. NO. | COLOR |
|----------|--------|
| 6048 | WHITE |
| 6049 | RED |
| 6050 | BLACK |
| 6051 | YELLOW |
| 6052 | GREEN |
| 6053 | BLUE |

UNIVERSAL HORIZONTAL PC TEST JACK

ACCEPTS .080" TIP

This universal design accepts .080" tip plug in either end, or from top or bottom. Top contact will also accept hook-type oscilloscope probe. Two common terminals. Current rating: 5 Amps. Breakdown voltage: 2100 VRMS. Capacitance 1.0 pF maximum. Mounts on .400" centers in .052" holes. Side by side mounting on .160" centers.

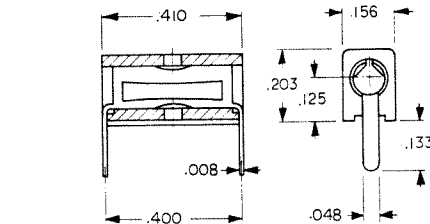

ACTUAL SIZE

MATERIAL

Body: Nylon per ASTM D4066
Contact: Beryllium Copper Silver Plate

SELECTION OF COLORS

| CAT. NO. | COLOR |
|----------|--------|
| 6054 | WHITE |
| 6055 | RED |
| 6056 | BLACK |
| 6057 | YELLOW |
| 6058 | GREEN |
| 6059 | BLUE |

LOW PROFILE HORIZONTAL PC TEST JACK

ACCEPTS .080" TIP

This low profile double-entry design is recognized for its dependability, and allows dense packaging on .160" centers. Side by side mounting. Closed entry design for use with .074 to .084 dia. tips. Reliability is designed into this rugged low cost jack. Mounts on .400" centers in .052" holes. Current rating: 5 Amps. Breakdown voltage 2100 VRMS. Contact resistance .010Ω maximum.

MATERIAL

Body: Nylon per ASTM D4066
Contact: Beryllium Copper, Silver or Gold Plate




Choice of Gold or Silver Plate Contacts

WITH GOLD PLATING
SELECTION OF COLORS

| CAT. NO. | COLOR |
|----------|--------|
| 6060 | WHITE |
| 6061 | RED |
| 6062 | BLACK |
| 6063 | YELLOW |
| 6064 | GREEN |
| 6065 | BLUE |

WITH SILVER PLATING
SELECTION OF COLORS

| CAT. NO. | COLOR |
|----------|--------|
| 6066 | WHITE |
| 6067 | RED |
| 6068 | BLACK |
| 6069 | YELLOW |
| 6070 | GREEN |
| 6071 | BLUE |



ACTUAL SIZE