


# 66105-1 Product Details

---

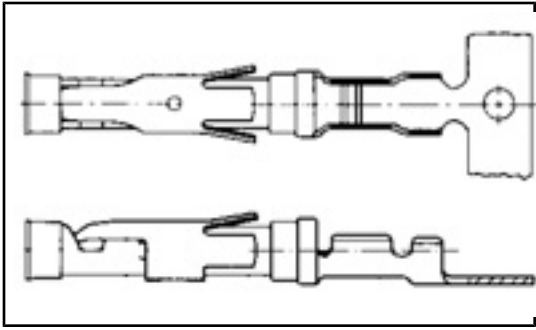

**66105-1**

TE Internal Number: 66105-1

 [Active](#)

## Multimate

 [Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

### Product Highlights:

- Socket
- Gold (30) over Nickel (30) Contact Mating Area Plating Material
- Wire Range = 0.20-0.60<sup>2</sup> [24-20] mm [AWG]
- Insulation Diameter = 1.02 - 2.03 mm
- Brass Contact Base Material

[View all Features](#)

## Documentation & Additional Information

### Product Drawings:

- [SOCKET ASSEMBLY, LOOSE PIECE, TYPE III+](#) (PDF, English)

### Catalog Pages/Data Sheets:

- [HIGH CURRENT PRODUCTS](#) (PDF, English)
- [PRECISION PIN AND SOCKET CONTACTS](#) (PDF, English)
- [Signal Contacts](#) (PDF, English)
- [M\\_SERIES\\_PIN\\_AND\\_SOCKET\\_CONNECTORS](#) (PDF, English)
- [CIRCULAR CONNECTORS FOR COMMERCIAL SIGNAL AND POWER ...](#) (PDF, English)
- [AMP Circular Connectors for Commercial Signal & Powe...](#) (PDF, English)

### Product Specifications:

- [Contact, Type III+, Stamped and Formed](#) (PDF, English)

### Application Specifications:

- [Type III+ \(Size 16\) Contacts](#) (PDF, English)

### Instruction Sheets:

- [Selection Charts for Multimate Pin and Socket Contacts](#) (PDF, English)
- [Application and Maintenance for Crimping Head Assembly](#) (PDF, English)

### CAD Files: ([CAD Format & Compression Information](#))

- [2D Drawing](#) (DXF, Version H)
- [3D Model](#) (IGES, Version H)
- [3D Model](#) (STEP, Version H)

[List all Documents](#)

### Additional Information:

- [Product Line Information](#)

### Related Products:

- [Tooling](#)

## Product Features (Please use the Product Drawing for all design activity)

### Product Type Features:

- [Pin/Socket](#) = Socket
- [Insulation Diameter \(mm \[in\]\)](#) = 1.02 – 2.03 [0.040 – 0.080]
- Product Type = Type III+
- [Insulation Support](#) = Yes
- [Wire Termination Type](#) = Crimp
- Wire/Cable Type = Discrete Wire
- Grade = Commercial
- Comment = Overall insulation crimp diameter, including crimp barrel, must not exceed 3.18 [.125].; PRO-CRIMPER II # 58495-1 Hand Tool for field repair use only.; Insertion Tool No. 91002-1 (for Insulation Dia. 1.78 [.070] or less), No. 200893-2 (for Insulation Dia. .090 [2.29] max.) Extraction Tool No. 305183.

### Electrical Characteristics:

- High Current = No

### Termination Related Features:

- [Termination End Plating](#) = Tin
- Pin Diameter (mm [in]) = 1.57 [0.062]

### Body Related Features:

- [Wire Range \(mm \[AWG\]\)](#) = 0.20-0.60<sup>2</sup> [24-20]
- Spring Material = Stainless Steel
- Used With = G Series Connectors, CPC Connectors, M Series Connectors

### Contact Related Features:

- [Contact Mating Area Plating Material](#) = Gold (30) over Nickel (30)
- [Contact Base Material](#) = Brass
- [Contact Size](#) = 16
- [Contact Type](#) = Signal

### Industry Standards:

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

### Conditions for Usage:

- [Terminate To](#) = Wire
- Test Current (Amps.) = 13.0

### Packaging Related Features:

- [Packaging Method](#) = Loose Piece
- Packaging Quantity = 1,000/Box

### Other:

- Brand = AMP