



PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM"A"
70229-X01/X01LF	1.6	2.90
70229-X11/X11LF	2.4	3.53

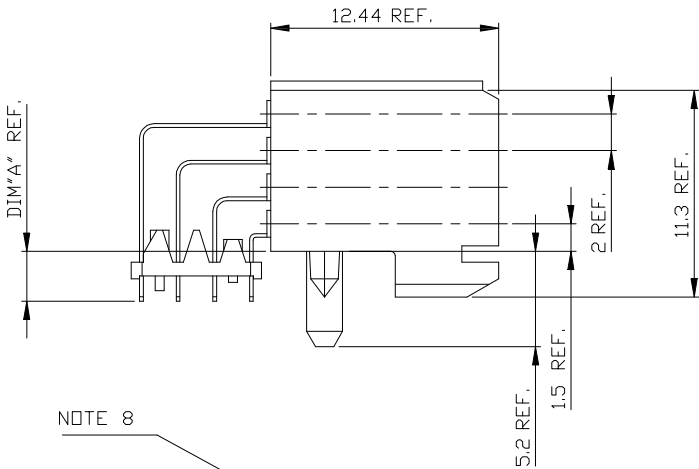


NOTE 8

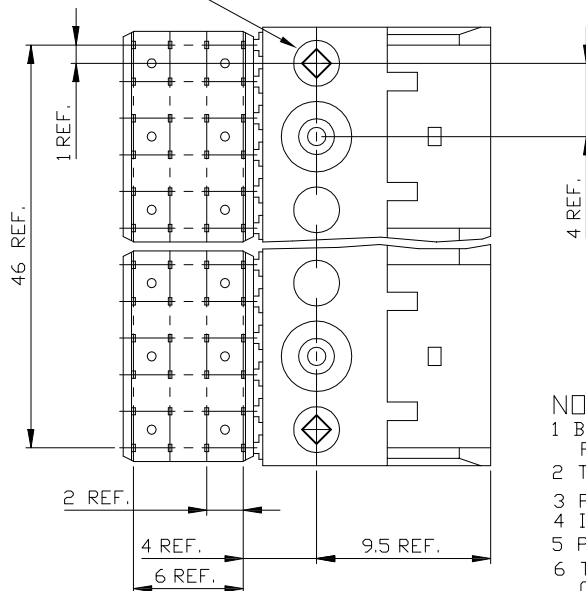


PLATING CONTACT AREA:

PRODUCT NR:	PERFORMANCE LEVEL:
70229-1YZ/1YZLF	TELCORDIA CD
70229-2YZ/2YZLF	CUSTOMER SPECIAL
70229-3YZ/3YZLF	CUSTOMER SPECIAL
70229-9YZ/9YZLF	TELCORDIA CD

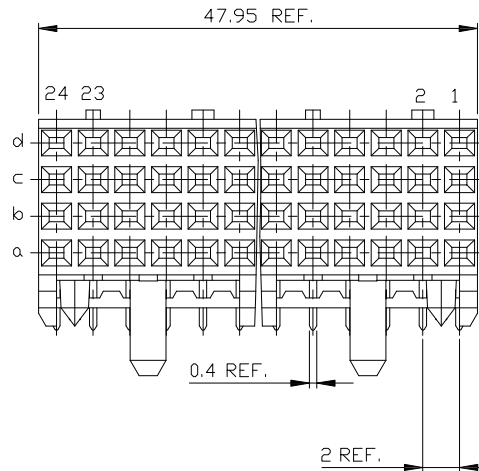


PRODUCT AFTER HOT RIVETTING.

PC BOARD THICKNESS ±0.20  
SEE TABLE

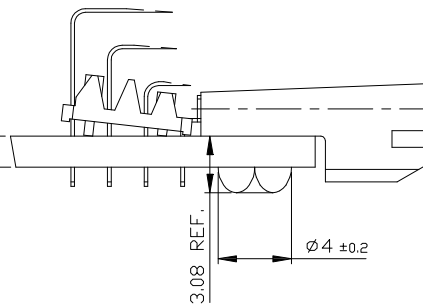

NOTES:

- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS  
FLAME RETARDANT ACC. UL 94-V0
- TERMINAL MATERIAL: PHOSPHOR BRONZE.
- PLATING SOLDER TAILS 2-8 µm SnPb 90-97 OR 2-8 鍍 PURE Sn
- INDICATED HOLES ARE UNPLATED.
- PRODUCT MARKING: PART NUMBER & BATCH ID.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.



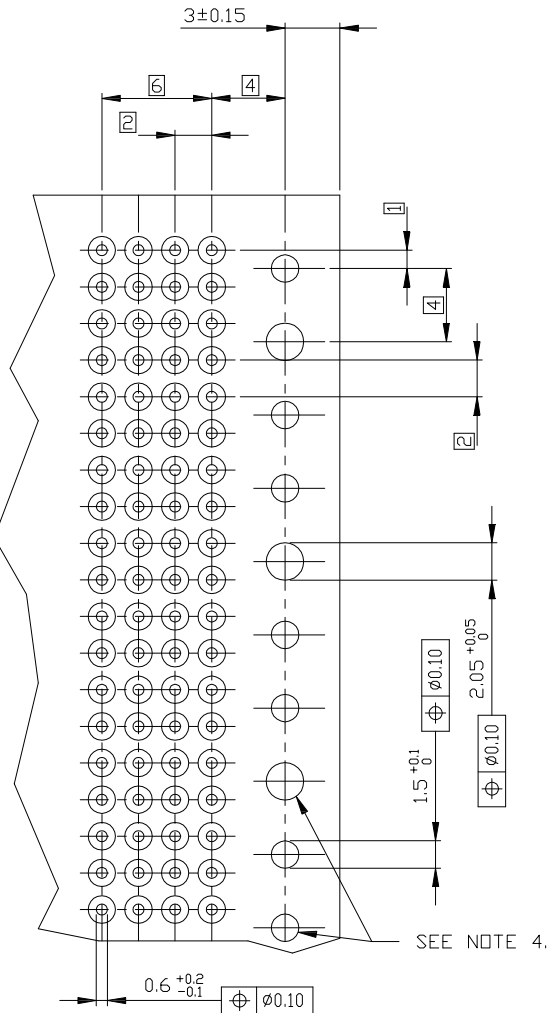


RECOMMENDED HOLE PATTERN,  
COMPONENT SIDE.



mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCJ	
K	B064-0104	Clu	041221	linear		projection	title
L	B066-0477	Cenh	11/20/06	angles		RA FEMALE SIGNAL	STB 48 mm VERSION
M	DG07-0168	Cenh	05/08/07			product family	METRAL(tm)
G	V70769	DBB	970602	dir	Avan Zanten	900918	code
H	V00578	LLA	000316	enr	H. Bouwknegt	940308	213
J	V00847	LLA	000530	chr	A van Zanten	900918	sheet
				app	H van Voensel	900918	1 of 3
sheet	revision	M	M	M			
index	sheet	1	2	3			

All rights strictly reserved. Reproduction or issue to third parties in any form whatsoever is not permitted without written authority from the proprietor.  
 FCJ  
 Tous droits strictement réservés. Reproduction ou communication à des tiers ininterdit sous quelque forme que ce soit sans autorisation écrite du propriétaire.  
 FCJ


PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM"A"
70229-X02/X02LF	1.6	2.90
70229-X12/X12LF	2.4	3.53

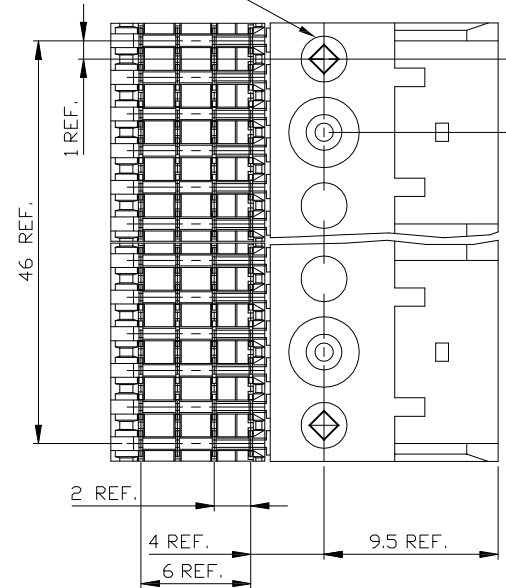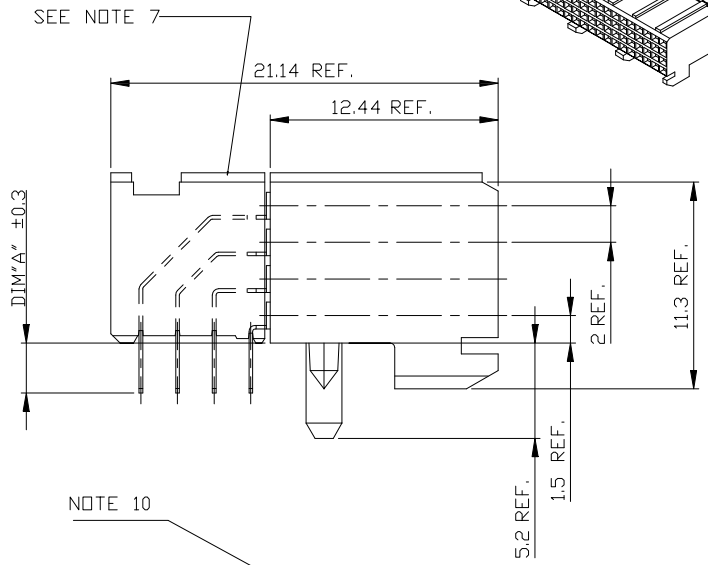

PLATING CONTACT AREA:	
PRODUCT NR:	PERFORMANCE LEVEL:
70229-1YZ/1YZLF	TELCORDIA CD
70229-2YZ/2YZLF	CUSTOMER SPECIAL
70229-3YZ/3YZLF	CUSTOMER SPECIAL
70229-9YZ/9YZLF	TELCORDIA CD

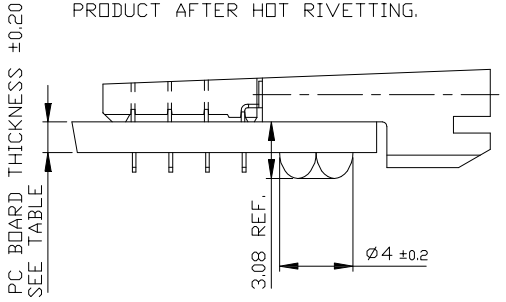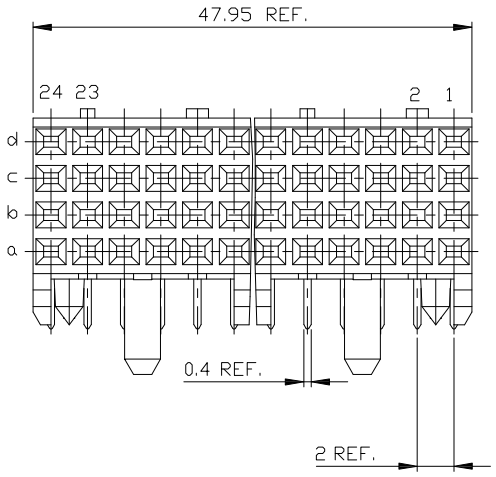




- NOTES:**
- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS FLAME RETARDANT ACC. UL 94-V0
  - TERMINAL MATERIAL: PHOSPHOR BRONZE.
  - PLATING SOLDER TAILS 2-8 μm SnPb 90-97 OR 2-8 鍍 PURE Sn
  - INDICATED HOLES ARE UNPLATED.
  - PRODUCT MARKING: PARTNUMBER & BATCH ID.
  - SET BACK FOR PRESS BLOCK.
  - TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD
  - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
  - THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
  - DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.

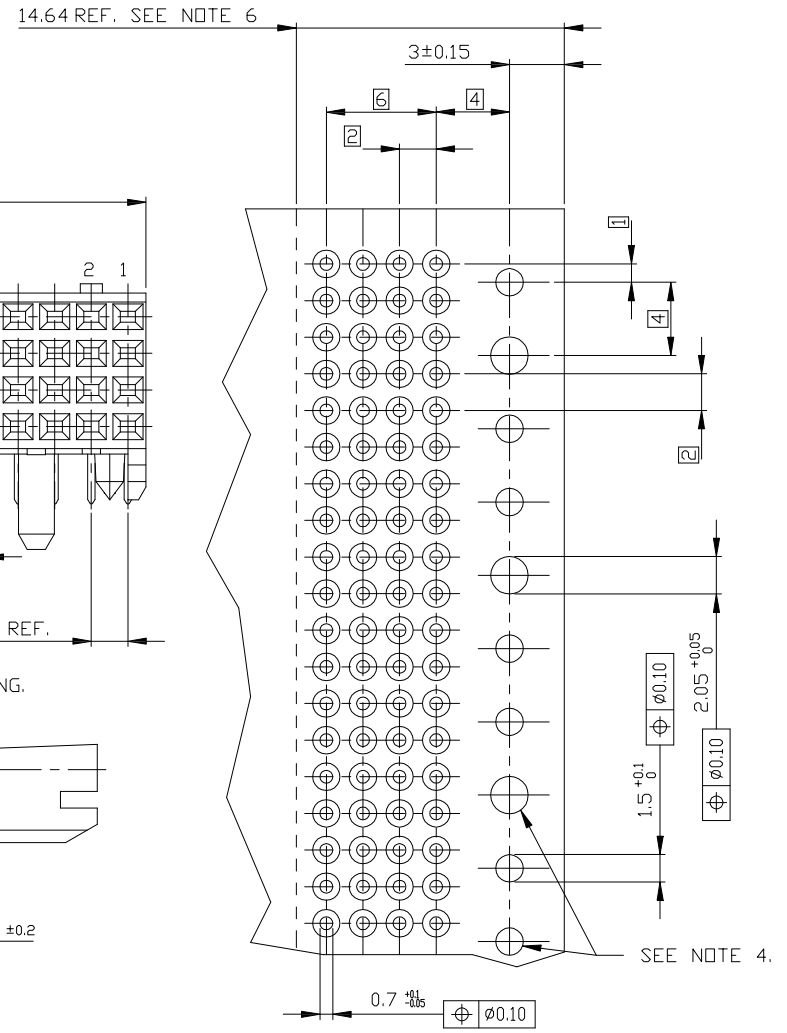


RECOMMENDED HOLE PATTERN, COMPONENT SIDE.

mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY			
ltn/ecn naddr date		linear		projection		title	
						RA FEMALE SIGNAL	
		angles		mm		product family METRAL(tm)	
		dr. D. de Bil 970529		scale		code	
		engr. P. Schalk 970529		A2		213	
		chr. P. Schalk 970529		5:1		sheet	
		appd. H. Cooljans 970529				2 of-	
sheet	revision						
index	sheet						


PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM "A"
70229-X03/X03LF	1.6	2.90
70229-X13/X13LF	2.4	3.53

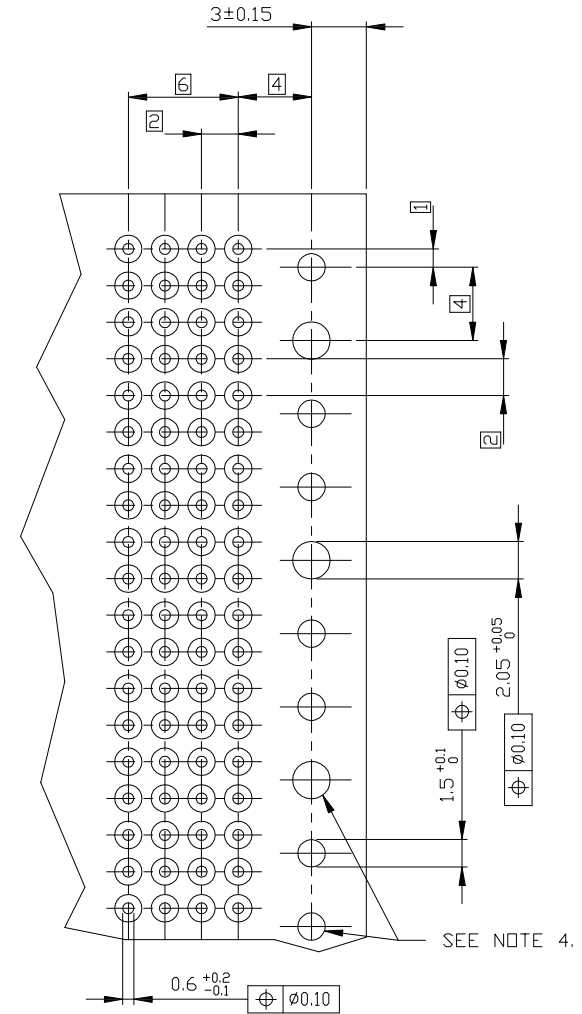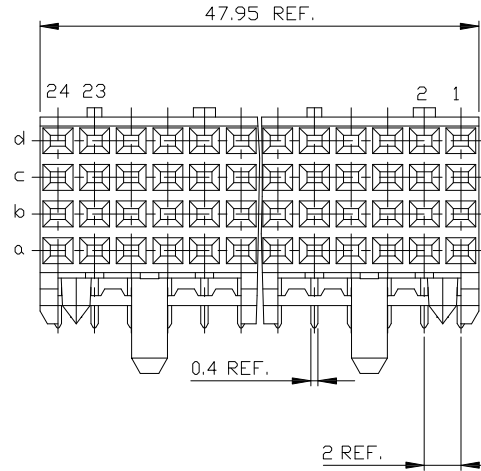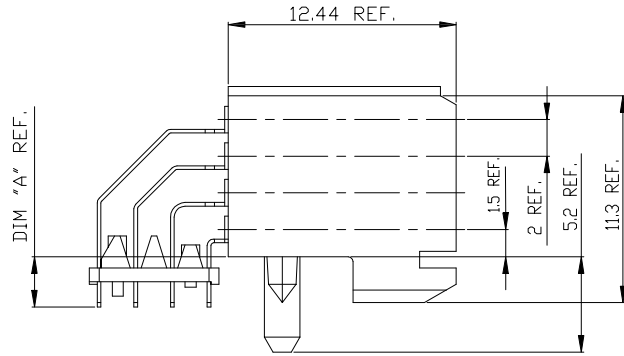

NOTE 8

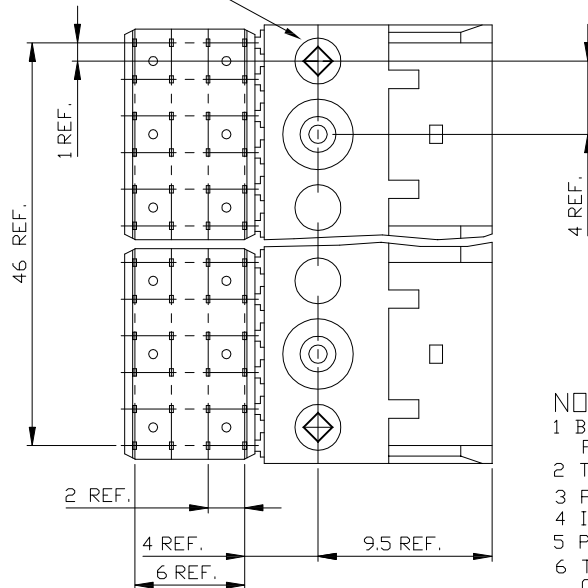

PRODUCT AFTER HOT RIVETTING.

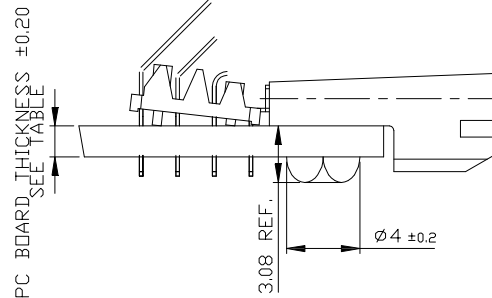

NOTES:

- 1 BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS  
FLAME RETARDANT ACC. UL 94-V0
- 2 TERMINAL MATERIAL: PHOSPHOR BRONZE.
- 3 PLATING SOLDER TAILS 2-8 um SnPb 90-97 OR 2-8 um PURE Sn
- 4 INDICATED HOLES ARE UNPLATED.
- 5 PRODUCT MARKING: PART NUMBER & BATCH ID.
- 6 THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008
- 7 THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
8. DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.

RECOMMENDED HOLE PATTERN,  
COMPONENT SIDE.

PLATING CONTACT AREA:

PRODUCT NR:	PERFORMANCE LEVEL:
70229-1YZ/1YZLF	TELCORDIA CO
70229-2YZ/2YZLF	CUSTOMER SPECIAL
70229-3YZ/3YZLF	CUSTOMER SPECIAL
70229-9YZ/9YZLF	TELCORDIA CO

mat'l code		tolerances unless otherwise specified		CUSTOMER COPY		FCJ	
ltn	ecn	nddr	date	linear	projection	title	code
					mm	RA FEMALE SIGNAL STB 48 mm VERSION	213
				angles	mm	product family METRAL(tm)	sheet 3 of-
				dr: Heaven Cen 11/20/06	51	70229	
				enrg: Collins Lu 11/20/06			
				chr: Beer Fu 11/20/06			
				appd: Joseph Hsia 11/20/06			
sheet index	revision	sheet					

All rights strictly reserved. Reproduction or issue to third parties in any form  
 whatsoever is not permitted without written authority from the proprietor.  
 Tous droits strictement réservés. Reproduction ou communication à des tiers  
 interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire.  
 FCJ © FCI bv.