



PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM"A"
70229-X01/X01LF	1.6	2.90
70229-X11/X11LF	2.4	3.53

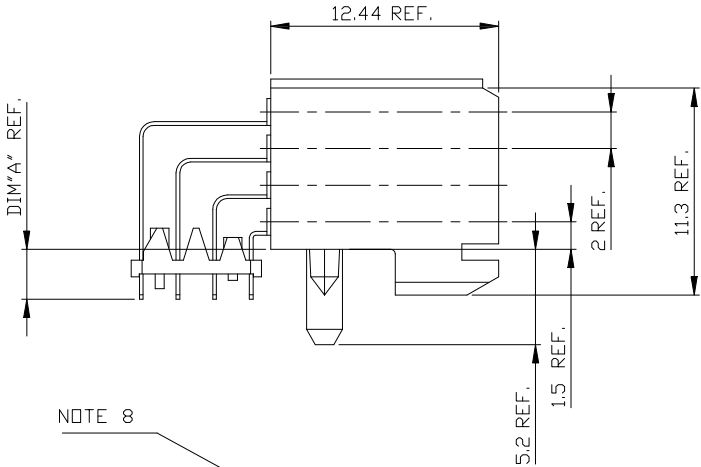


NOTE 8

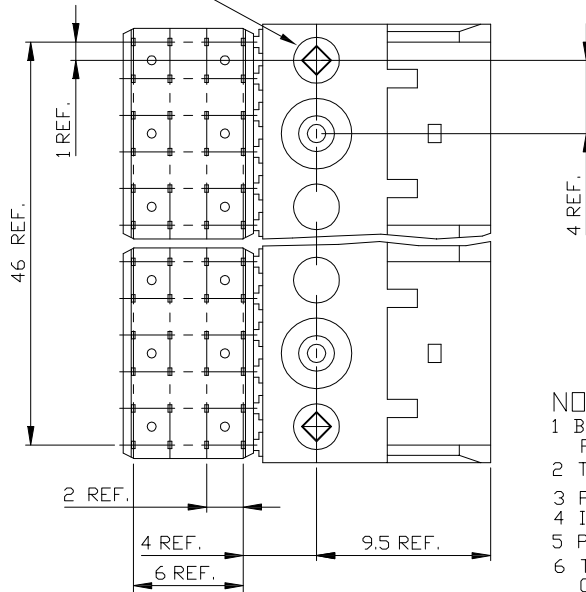



PLATING CONTACT AREA:

PRODUCT NR:	PERFORMANCE LEVEL:
70229-1YZ/1YZLF	TELCORDIA CO
70229-2YZ/2YZLF	CUSTOMER SPECIAL
70229-3YZ/3YZLF	CUSTOMER SPECIAL

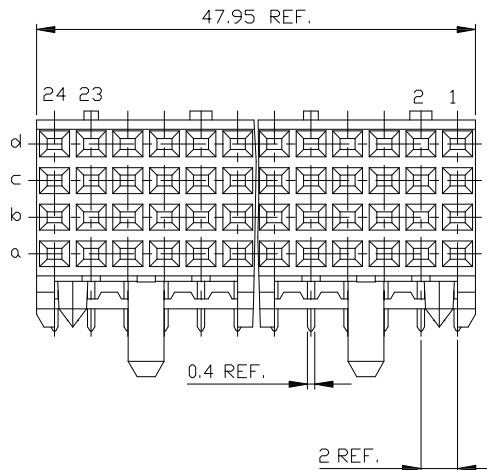

PRODUCT AFTER HOT RIVETTING.

PC BOARD THICKNESS ±0.20
SEE TABLE

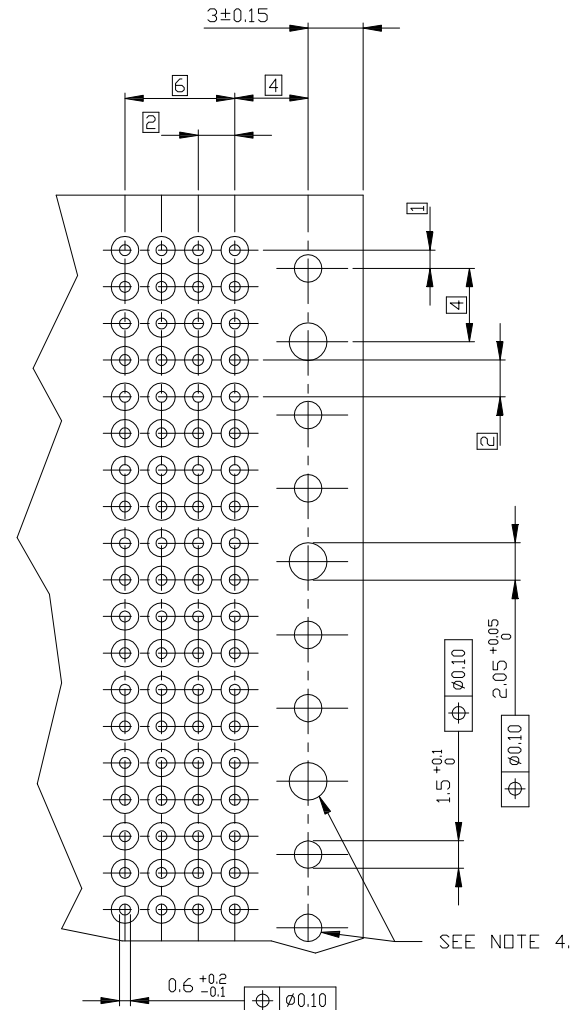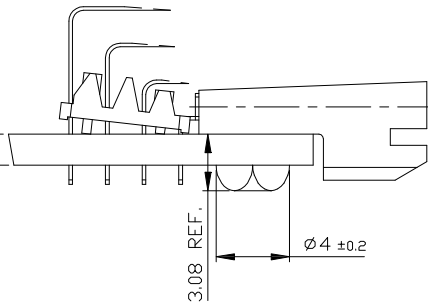

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

NOTES:

- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
- TERMINAL MATERIAL: PHOSPHOR BRONZE.
- PLATING SOLDER TAILS 2-8 µm SnPb 90-97 OR 2-8 鍍 PURE Sn
- INDICATED HOLES ARE UNPLATED.
- PRODUCT MARKING: PART NUMBER & BATCH ID.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.







mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY		FCJ				
K	DG04-0104	Clu	041221	linear		projection	title			
L	DG06-0477	Cenh	11/20/06	angles		mm	RA FEMALE SIGNAL STB 48 mm VERSION			
M	DG07-0168	Cenh	05/08/07	dir	Avan Zanten	900918	product family METRAL(tm)			
N	DG09-0068	Cenh	06/06/09	engr	H. Bouwknegt	940308	code			
H	V00578	LLA	000316	chr	A van Zanten	900918	213			
J	V00847	LLA	000530	app	H van Voensel	900918	sheet			
sheet	revision	N	N	N	N	scale	51	A2	70229	1 of 3
index	sheet	1	2	3		size	dwg no			

Tous droits strictement réservés. Reproduction ou communication à des tiers interdite sous quelque forme que ce soit sans autorisation écrite du propriétaire. Propriété de FCI bv. © FCI bv.



All rights strictly reserved. Reproduction or issue to third parties in any form whatever is not permitted without written authority from the proprietor. Property of FCI bv. © FCI bv.

PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM"A"
70229-X02/X02LF	1.6	2.90
70229-X12/X12LF	2.4	3.53

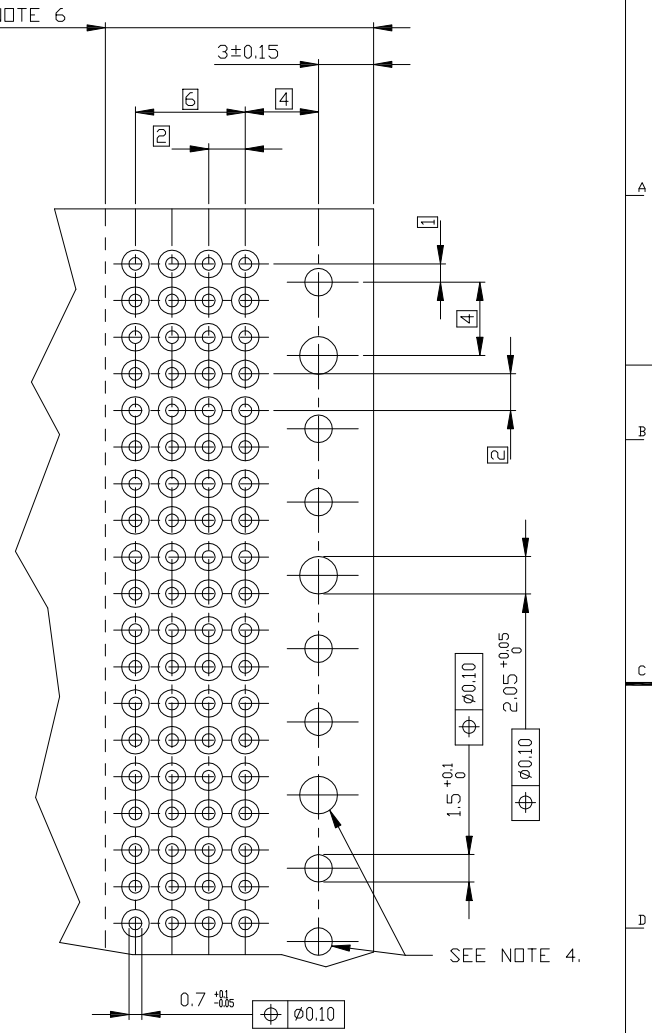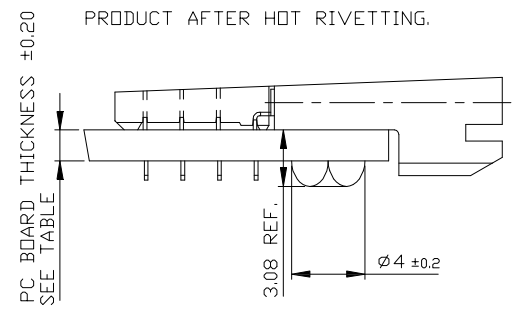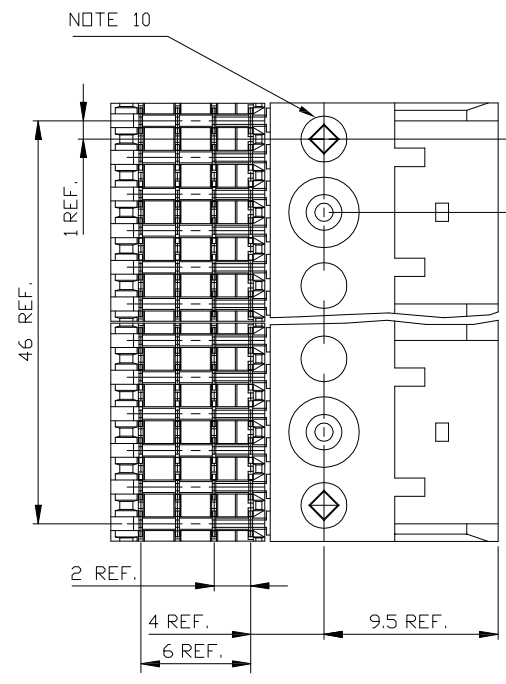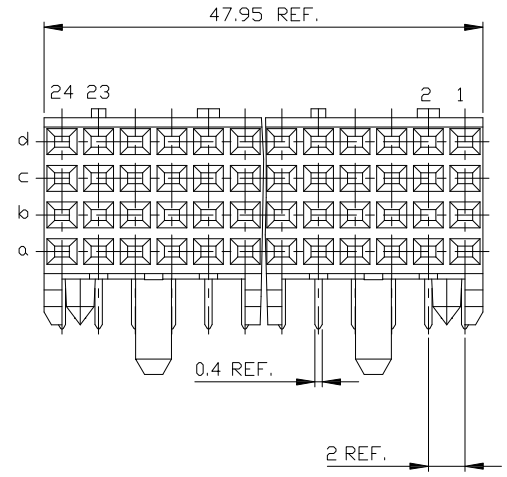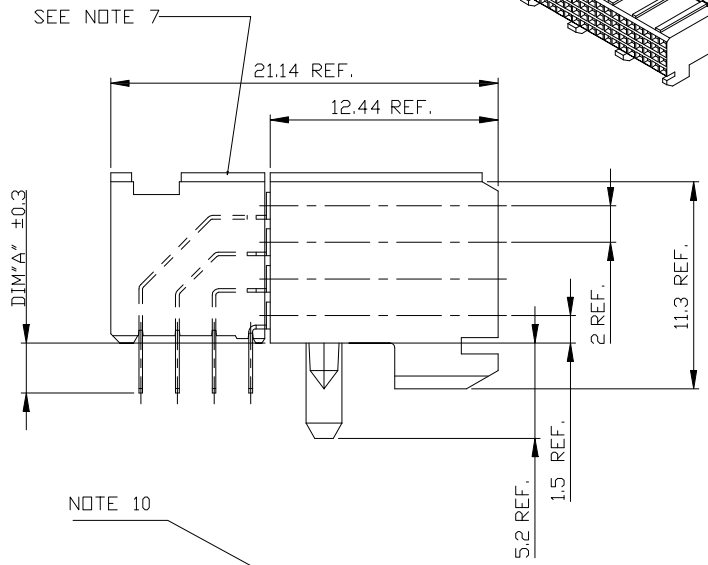

- NOTES:**
- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
 - TERMINAL MATERIAL: PHOSPHOR BRONZE.
 - PLATING SOLDER TAILS 2-8 µm SnPb 90-97 OR 2-8 鍍 PURE Sn
 - INDICATED HOLES ARE UNPLATED.
 - PRODUCT MARKING: PARTNUMBER & BATCH ID.
 - SET BACK FOR PRESS BLOCK.
 - TOP SURFACE OF PRESS BLOCK MAY EXTEND UP TO 0.4MM HIGHER THAN HOUSING. THIS MAY AFFECT THE TAIL LENGTH BEFORE APPLICATION TO A BOARD
 - THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
 - THE HOUSING WILL WITHSTAND EXPOSURE TO 260DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
 - DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.





RECOMMENDED HOLE PATTERN, COMPONENT SIDE.

PLATING CONTACT AREA:	
PRODUCT NR:	PERFORMANCE LEVEL:
70229-1YZ/1YZLF	TELCORDIA CO
70229-2YZ/2YZLF	CUSTOMER SPECIAL
70229-3YZ/3YZLF	CUSTOMER SPECIAL


mat'l. code		tolerances unless otherwise specified		CUSTOMER COPY			
ltn/ecn naddr date		linear		projection		title	
						RA FEMALE SIGNAL	
				mm		product family METRAL(tm)	
				scale		code	
				5:1		213	
				A2		sheet	
				70229		2 of-	
sheet index		revision sheet					

All rights strictly reserved. Reproduction or issue to third parties in any form, whether or not permitted without written authority from the proprietor. FCJ logo.

PC BOARD VERSIONS		
PRODUCTNR:	PCB THICKNESS	DIM "A"
70229-X03/X03LF	1.6	2.90
70229-X13/X13LF	2.4	3.53

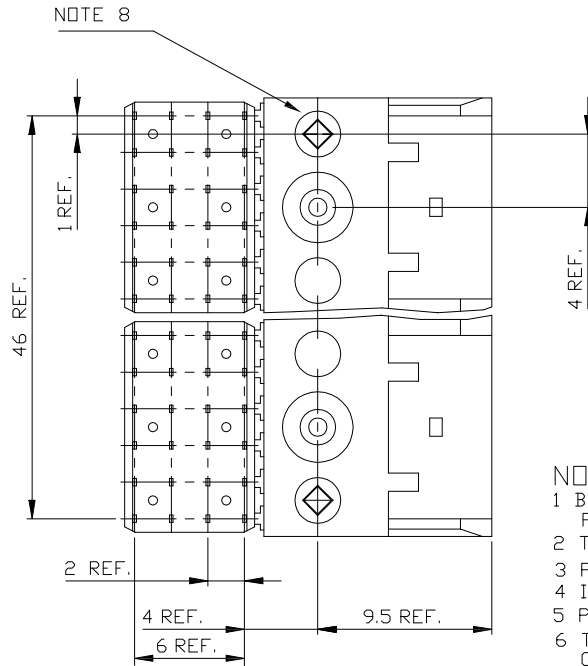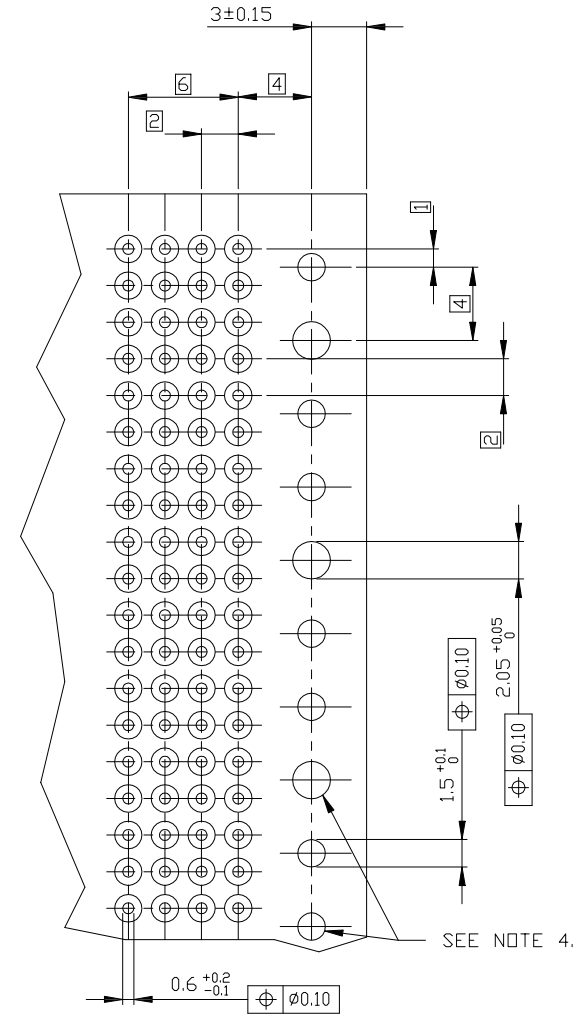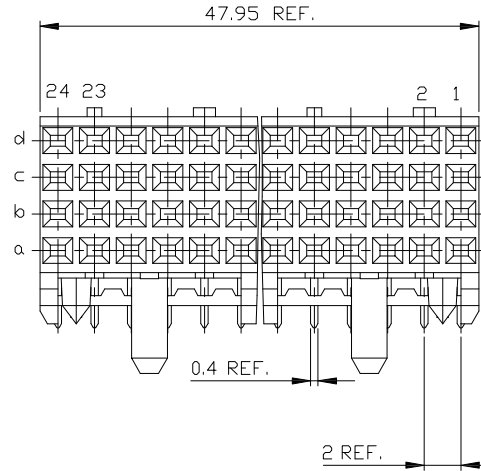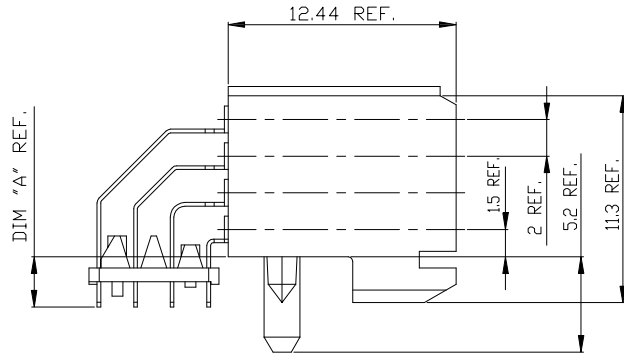

PRODUCT AFTER HOT RIVETTING.

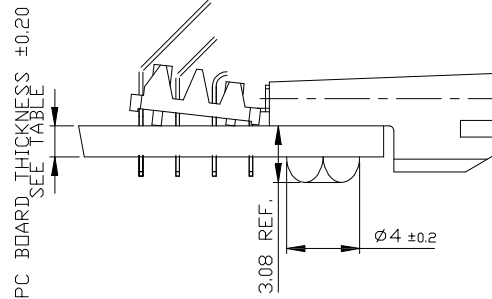

NOTES:

- BODY MAT'L: LIQUID CRYSTAL POLYMER 30% GLASS
FLAME RETARDANT ACC. UL 94-V0
- TERMINAL MATERIAL: PHOSPHOR BRONZE.
- PLATING SOLDER TAILS 2-8 um SnPb 90-97 OR 2-8 um PURE Sn
- INDICATED HOLES ARE UNPLATED.
- PRODUCT MARKING: PART NUMBER & BATCH ID.
- THIS PRODUCT MEETS EUROPEAN UNION DIRECTIVES AND OTHER COUNTRY REGULATIONS AS DESCRIBED IN GS-22-008.
- THE HOUSING WILL WITHSTAND EXPOSURE TO 260 DEGREE PEAK TEMPERATURE FOR 10 SECONDS IN A WAVE SOLDER APPLICATION.
- DIAMOND LOCATION PEG ARE ONLY EXISTED ON THE BOTH SIDES OF PRODUCT.

RECOMMENDED HOLE PATTERN,
COMPONENT SIDE.

PLATING CONTACT AREA:

PRODUCT NR:	PERFORMANCE LEVEL:
70229-1YZ/1YZLF	TELCORDIA CO
70229-2YZ/2YZLF	CUSTOMER SPECIAL
70229-3YZ/3YZLF	CUSTOMER SPECIAL

mat'l code		tolerances unless otherwise specified		CUSTOMER COPY		FCJ	
ltn	ecn	nddr	date	linear	projection	title	www.fcdconnect.com
					⊕	RA FEMALE SIGNAL	
				angles	mm	STB 48 mm VERSION	
				dr: Heaven Cen 11/20/06	product family	METRAL(tm)	code 213
				enr: Collins Lu 11/20/06	size	wg no	sheet 3 of-
				chr: Beer Fu 11/20/06	scale	51	
				app: Joseph Hsia 11/20/06	A2	70229	
sheet index	revision						