


# 770071-1 Product Details



770071-1

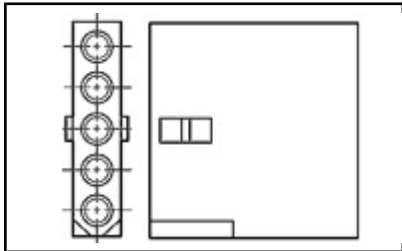

[Active](#)

.198, .200, .250" Centerline, 250 V, 13 A max.



[Always EU RoHS/ELV Compliant \(Statement of Compliance\)](#)

## Product Highlights:

- Housing
- Receptacle
- 5.03 mm Centerline
- Number of Circuits = 3
- In-Line Contact Layout

[View all Features](#) | [Find Similar Products](#)

**NEW!**

## Documentation & Additional Information

### Product Drawings:

- [RECEPTACLE, 3 CIRCUIT, .093 COMMERCIAL PIN AND SOCKET](#) (PDF, English)

### Catalog Pages/Data Sheets:

- [SOFT SHELL PIN AND SOCKET CONNECTORS](#) (PDF, English)

### Product Specifications:

- [Connector, Commercial, Pin & Socket .093 Dia](#) (PDF, English)

### Application Specifications:

- [.093 Diameter Pin and Socket Contacts and Housings](#) (PDF, English)

### Instruction Sheets:

- None Available

### CAD Files:

- None Available

### Related Products:

- [Tooling](#)
- [Mating Products \(2\)](#)
- [Contacts \(24\)](#)

[List all Documents](#)

**Product Features (Please use the Product Drawing for all design activity)**

**Product Type Features:**

- Product Type = Housing
- Gender = Receptacle
- Number of Circuits = 3
- Mount = Panel Mount
- Lock Type = Detent Lock
- Connector Line = Commercial Pin and Socket
- Color = Natural

**Electrical Characteristics:**

- Voltage (VAC) = 250

**Body Related Features:**

- Centerline (mm [in]) = 5.03 [0.198]
- Contact Diameter (mm [in]) = 2.36 [0.093]

**Contact Related Features:**

- Contact Layout = In-Line

**Housing Related Features:**

- Housing Material = Nylon
- Housing Flammability Rating = UL 94V-2

**Industry Standards:**

- [RoHS/ELV Compliance](#) = RoHS compliant, ELV compliant
- [Lead Free Solder Processes](#) = Not relevant for lead free process
- RoHS/ELV Compliance History = Always was RoHS compliant

**Packaging Related Features:**

- Packaging Method = One Piece Housing

**Other:**

- Brand = AMP