

Fig. 1

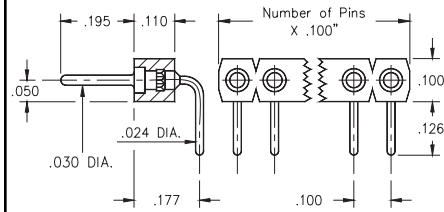


Fig. 2

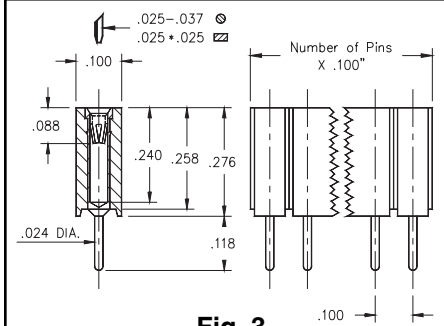


Fig. 3

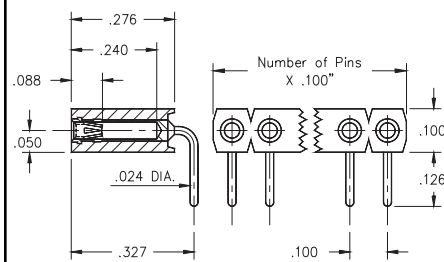


Fig. 4


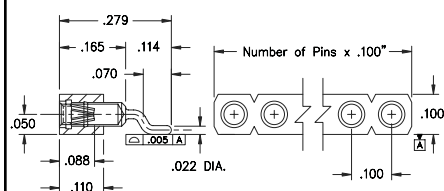


Fig. 5

- Pin interconnects available with straight MM #7007 or right angle MM #5005 solder tails. See page 173 for details.
- Sockets are available with straight MM #1304 or right angle MM #1305 solder tails. See pages 146 & 147 for details.
- MM #1304 and MM #1305 receptacles use Hi-Rel, 6-finger BeCu #47 contacts rated at 4.5 amps. Receptacles accept .030" diameter and .025" square pins. See page 211 for details.
- Insulators are high temp. thermoplastic.

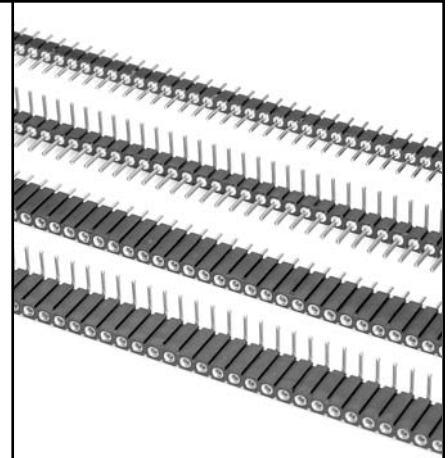

Ordering Information

Fig. 1	Series 800...10-001	Straight Pin Header				
	800-XX-0__-10-001000					
	Specify # of pins		└───> 01-64			
Fig. 2	Series 800...20-001	Right Angle Pin Header				
	800-XX-0__-20-001000					
	Specify # of pins		└───> 02-64			
XX= Plating Code See Below For RoHS compliance select ◊ plating code.						
SPECIFY PLATING CODE XX=		10 ◊	90	40 ◊		
Pin Plating		10μ" Au	200μ" Sn/Pb	200μ" Sn		
Fig. 3	Series 801...10-001	Straight Socket				
	801-XX-0__-10-001000					
	Specify # of pins		└───> 01-50			
Fig. 4	Series 801...20-001	Right Angle Socket				
	801-XX-0__-20-001000					
	Specify # of pins		└───> 01-50			
Fig. 5	Series 801...40-002	SMT Right Angle Socket				
	801-XX-0__-40-002000					
	Specify # of pins		└───> 02-10			
XX= Plating Code See Below For RoHS compliance select ◊ plating code.						
SPECIFY PLATING CODE XX=		13 ◊	93	99	43 ◊	44 ◊
Sleeve (Pin)		10μ" Au	200μ" Sn/Pb	200μ" Sn/Pb	200μ" Sn	200μ" Sn
Contact (Clip)		30μ" Au	30μ" Au	200μ" Sn/Pb	30μ" Au	200μ" Sn