


7 6 5 4 3 2 1

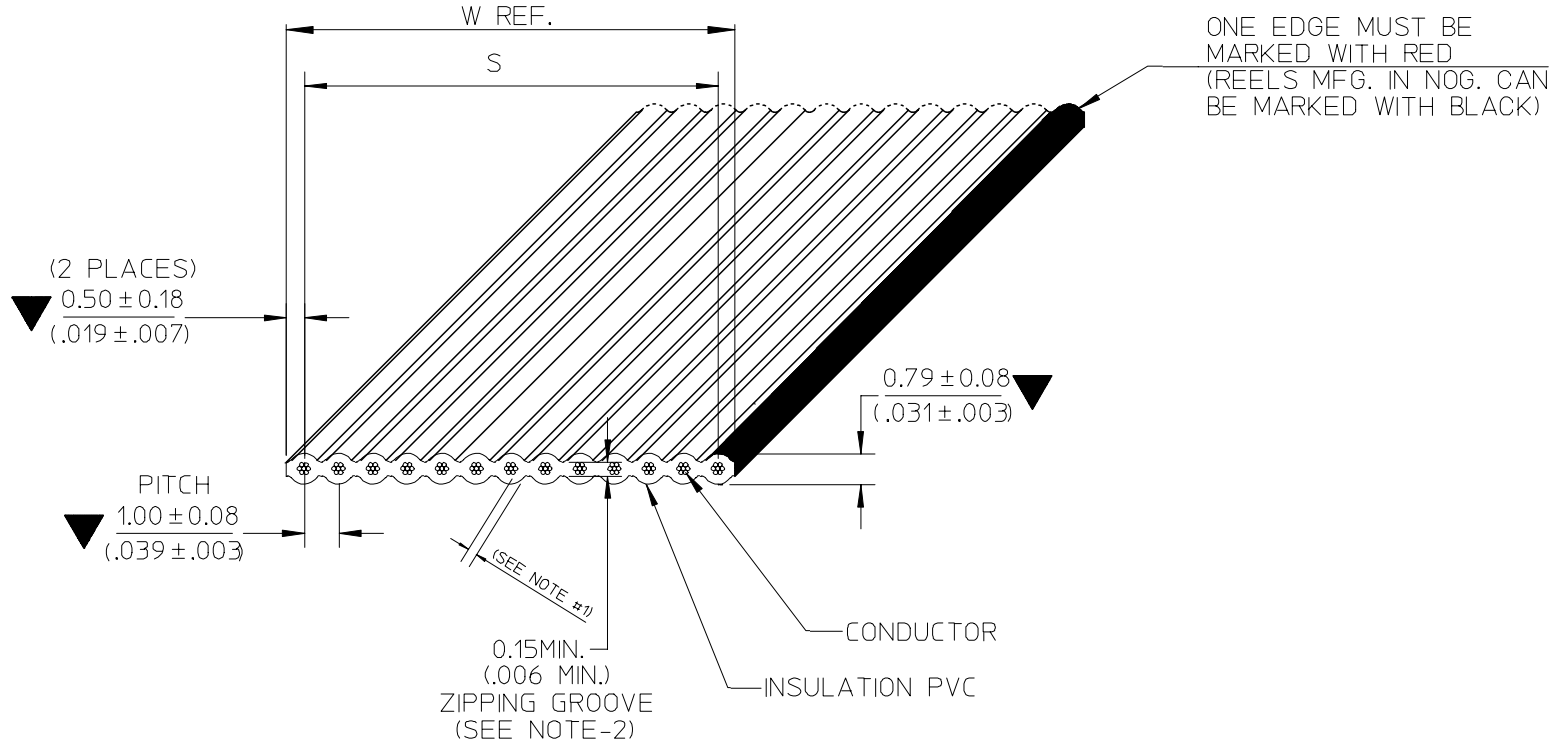

- NOTE :**
1. THE CABLE SHALL HAVE A MINIMUM OF 0.178mm. (.007") THICKNESS INSULATION AT ANY POINT
 2. RIP TEST:
 - THE 0.15mm. (.006") ZIPPING GROOVE SHALL BE CAPABLE OF BEING RIPPED BY HAND WITHIN THE RECESS, WITHOUT EXPOSING THE ADJACENT CONDUCTORS
 3. RoHS AND LEAD FREE COMPLIANT
 4. SPECIAL REQUIREMENT: N/A

B	E-07-0748	B ₁ : ADD NON-OPERATING TEMP.	07/11/22
A	N/A	NEW RELEASE.	06/07/10
REV. HISTORY	EC NO.	DETAIL	DATE

SEE CHANGE DETAIL.
 EC NO: THL2008-0015
 DRWN: CPANSAKHOM 2007/11/28
 CHKD: DNARINTARA 2007/11/29
 APPR: SVIRATJAPOL 2007/12/04

QUALITY SYMBOLS
▼ = 3
▽ = 0
DESCRIPTION
REV

GENERAL TOLERANCES (UNLESS SPECIFIED)	
	mm INCH
4 PLACES	± --- ± ---
3 PLACES	± --- ± ---
2 PLACES	± --- ± ---
1 PLACE	± --- ± ---
ANGULAR ± --- °	
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	

DIMENSION STYLE	
MM/IN	
DRAWN BY	DATE
CPANSAKHOM	2006/07/10
CHECKED BY	DATE
PMEECHAI	2006/07/10
APPROVED BY	DATE
SVIRATJAPOL	2006/07/10
MATERIAL NO.	
SEE CHART	
SIZE	
A 4	

SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION
NTS	INCH	
TITLE		
FCB ROUND CONDUCTOR 1.00MM(.039)CENTERS PVC. 28AWG STR TINNED		
MOLEX INCORPORATED		
MATERIAL NO.	DOCUMENT NO.	SHEET NO.
SEE CHART	SD-24500-001	1 OF 3
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		

6 5 4 3 2 1

SPECIFICATIONS

PHYSICAL

CONDUCTOR SPACING ----- 1.00(.039") \bar{C} TO \bar{C}
 WIRE GAUGE ----- 28 AWG(7/36) STRANDED TINNED
 INSULATION ----- P.V.C GRAY (LEAD FREE)

AGENCY

U.L. STYLE NO. ----- 2651
 TEMPERATURE RATING ----- -20°C TO 105°C
 VOLTAGE RATING ----- 300V.MAX.
 FLAMMABILITY RATING ----- VW-1

ELECTRICAL

CONDUCTOR RESISTANCE (D.C.) ----- 68 m OHMS/FT. MAX.
 CHARACTERISTIC IMPEDANCE ----- TBD. OHMS NOM. (GS)
 ----- TBD. OHMS NOM. (GSG)
 CAPACITANCE ----- TBD. pF/FT. NOM. (GS)
 ----- TBD. pF/FT. NOM. (GSG)
 PROPAGATION DELAY ----- 1.4 ns/FT. NOM.
 INSULATION RESISTANCE ----- 10M OHMS (10FT. SAMPLE)
 DIELECTRIC WITHSTAND VOLTAGE ----- 2000 VRMS/MINUTE

GENERAL

\triangle NON-OPERATING TEMPERATURE ----- -20°C TO 105°C
 FAULTS AND/OR SPLICES ----- 1/REEL MAX. 100₀⁺³ FT. (30.48₀^{+0.914} M.)/REEL
 20FT. (6.096M.) MIN. LENGTH

SEE CHANGE DETAIL. EC NO: THL2008-0015 DRWN: CPANSAKHOM 2007/11/28 CHKD: DNARINTARA 2007/11/29 APPR: SVIRATJAPOL 2007/12/04	DESCRIPTION REV	QUALITY SYMBOLS		GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE		SCALE	DESIGN UNITS	THIRD ANGLE PROJECTION			
						MM/IN		NTS	INCH				
		\blacktriangledown = \triangle =		mm	INCH	DRAWN BY	DATE	TITLE					
				4 PLACES	± ---	± ---	CPANSAKHOM	2006/07/10	FCB ROUND CONDUCTOR 1.00MM(.039)CENTERS PVC. 28AWG STR TINNED				
				3 PLACES	± ---	± ---	CHECKED BY	DATE	MOLEX MOLEX INCORPORATED				
		2 PLACES	± ---	± ---	PMEECHAI	2006/07/10	SHEET NO.						
		1 PLACE	± ---	± ---	APPROVED BY	DATE	2 OF 3						
		ANGULAR ± ---°		SVIRATJAPOL 2006/07/10		MATERIAL NO.		DOCUMENT NO.		SEE CHART			
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SIZE		THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

7 6 5 4 3 2 1

E

D

C

B

A

E

D

C

B

A

CHART A				
DIMENSIONS MM. (INCHES)				
ENGINEERING NO.	ORDER NO.	NO. OF CONDUCTOR	DIMENSION S	DIM. W (REF.)
24500-10-100B	82-28-3010	10	9.00±0.18 (.354±.007)	10.00 (.394)
↑ -20- ↑	↑ 20	20	19.00±0.23 (.748±.009)	20.00 (.787)
↑ -24- ↑	↑ 24	24	23.00±0.23 (.906±.009)	24.00 (.945)
↑ -26- ↑	↑ 26	26	25.00±0.23 (.984±.009)	26.00 (1.024)
↑ -30- ↑	↑ 30	30	29.00±0.28 (1.142±.011)	30.00 (1.181)
↑ -34- ↑	↑ 34	34	33.00±0.28 (1.299±.011)	34.00 (1.339)
↑ -40- ↑	↑ 40	40	39.00±0.28 (1.535±.011)	40.00 (1.575)
↑ -44- ↑	↑ 44	44	43.00±0.28 (1.693±.011)	44.00 (1.732)
24500-50-100B	82-28-3050	50	49.00±0.28 (1.929±.011)	50.00 (1.969)

ENGINEERING NO.

24500-XX-XXXX

A B C D

- A : CABLE 1.00mm. (.039") CENTERS 28AWG STRANDED TINNED
- B : CONDUCTOR SIZE (AVAILABILITY 10,20,24,26,30,34,40,44 AND 50)
- C : CABLE LENGTH 100FT. (30.48M.)
- D : A = INCHES
B = FEET

SEE CHANGE DETAIL. EC NO: THL2008-0015 DRWN: CPANSAKHOM 2007/11/28 CHKD: DNARINTARA 2007/11/29 APPR: SVIRATJAPOL 2007/12/04	DESCRIPTION REV	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION																																								
		= =	<table border="1"> <tr> <th></th> <th>mm</th> <th>INCH</th> </tr> <tr> <td>4 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>3 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>2 PLACES</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td>1 PLACE</td> <td>± ---</td> <td>± ---</td> </tr> <tr> <td colspan="3">ANGULAR ± ---°</td> </tr> </table>		mm	INCH	4 PLACES	± ---	± ---	3 PLACES	± ---	± ---	2 PLACES	± ---	± ---	1 PLACE	± ---	± ---	ANGULAR ± ---°			<table border="1"> <tr> <th>DRAWN BY</th> <th>DATE</th> </tr> <tr> <td>CPANSAKHOM</td> <td>2006/07/10</td> </tr> <tr> <th>CHECKED BY</th> <th>DATE</th> </tr> <tr> <td>PMEECHAI</td> <td>2006/07/10</td> </tr> <tr> <th>APPROVED BY</th> <th>DATE</th> </tr> <tr> <td>SVIRATJAPOL</td> <td>2006/07/10</td> </tr> </table>		DRAWN BY	DATE	CPANSAKHOM	2006/07/10	CHECKED BY	DATE	PMEECHAI	2006/07/10	APPROVED BY	DATE	SVIRATJAPOL	2006/07/10	<table border="1"> <tr> <th>TITLE</th> </tr> <tr> <td>FCB ROUND CONDUCTOR 1.00MM(.039)CENTERS PVC. 28AWG STR TINNED</td> </tr> </table>		TITLE	FCB ROUND CONDUCTOR 1.00MM(.039)CENTERS PVC. 28AWG STR TINNED	MOLEX INCORPORATED		<table border="1"> <tr> <th>MATERIAL NO.</th> <th>DOCUMENT NO.</th> <th>SHEET NO.</th> </tr> <tr> <td>SEE CHART</td> <td>SD-24500-001</td> <td>3 OF 3</td> </tr> </table>		MATERIAL NO.	DOCUMENT NO.	SHEET NO.	SEE CHART	SD-24500-001	3 OF 3
			mm	INCH																																													
		4 PLACES	± ---	± ---																																													
		3 PLACES	± ---	± ---																																													
2 PLACES	± ---	± ---																																															
1 PLACE	± ---	± ---																																															
ANGULAR ± ---°																																																	
DRAWN BY	DATE																																																
CPANSAKHOM	2006/07/10																																																
CHECKED BY	DATE																																																
PMEECHAI	2006/07/10																																																
APPROVED BY	DATE																																																
SVIRATJAPOL	2006/07/10																																																
TITLE																																																	
FCB ROUND CONDUCTOR 1.00MM(.039)CENTERS PVC. 28AWG STR TINNED																																																	
MATERIAL NO.	DOCUMENT NO.	SHEET NO.																																															
SEE CHART	SD-24500-001	3 OF 3																																															
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS			SIZE Δ 4 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION																																														

6 5 4 3 2 1