

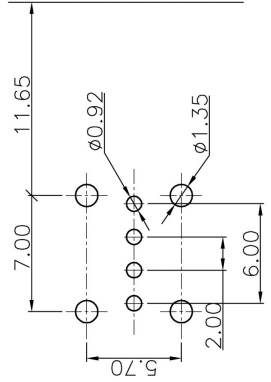
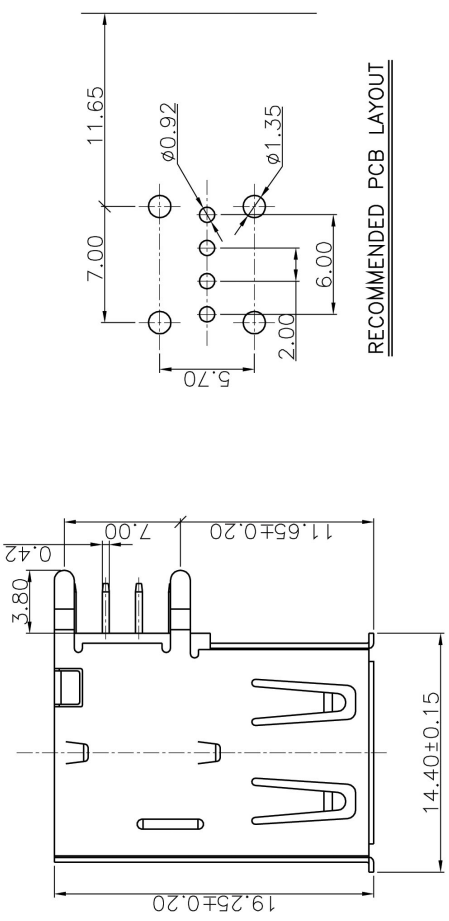


1	2	3	4	5	6	7	8	9	10	
							REV	ECNNO:	B Y	DATE
						
						

NOTE:
 MATERIAL: THERMOPLASTIC(PA6T)
 HOUSING:BLACK/WHITE/BROWN/BEIGE-----
 COLOR:BLACK/WHITE/BROWN/BEIGE-----
 CONTACT:PHOSPHONE BRONZE
 FRONT SHELL:BRASS
 BACK SHELL:STEEL
 PLATING:
 CONTACT: GOLD PLATING CORD:1u"/3u"/5u"/10u"/15u"/30u"
 SHELL: NICKEL PLATING
 SPECIFICATION:
 VOLTAGE RATING: 30V
 CURRENT RATING: 1.5A
 CONTACT RESISTANCE TERMINAL:30mΩ MAX
 DIELECTRIC WITHSTANDING VOLTAGE:750V AC
 INSULATION RESISTANCE:1000MΩ MIN
 ENVIRONMENTAL:TEMPERATURE RANGE -55° C~+85° C

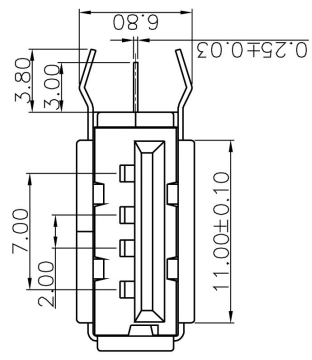

RECOMMENDED PCB LAYOUT

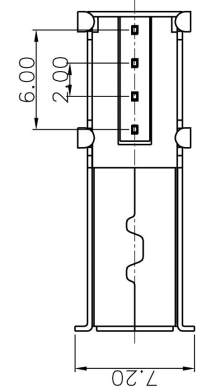

RoHS
 Compliant

-TOLERANCES- UNLESS OTHERWISE SPECIFIED	X.X	±0.30	X.X°	±3°	APPD:		ASSMANIN Electronics, Inc.	USB, A VERSION, HORIZONTAL, DIP TYPE.					
	X.XX	±0.15	X.XX'	±1'	CHECK:				PRODUCT NO: A-USB-A-E-R				
	X.XXX	±0.10	X.XXX'	±0.5'	DRAW:				DATE	SCALE	UNIT	TYPE	PAGE
									2007.05.03	FREE	MM	Z	•