



SPECIFICATIONS

- Accommodates .062" ± .008" [1.57 ± .20] PC board
- PPS or PA9T insulator
- Molded-in key available
- High reliability/high cycle hairpin bellows contact
- 1 amp current rating per contact
- 150 grams normal force minimum




READOUT



DUAL (D)

DIMENSIONS

Dimensions in [] are in millimeters, all others are in inches.

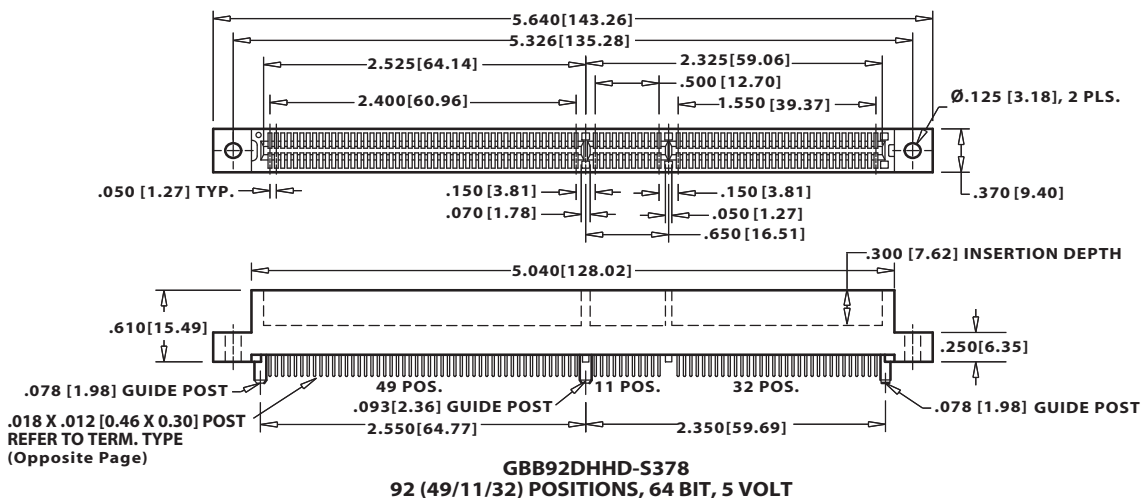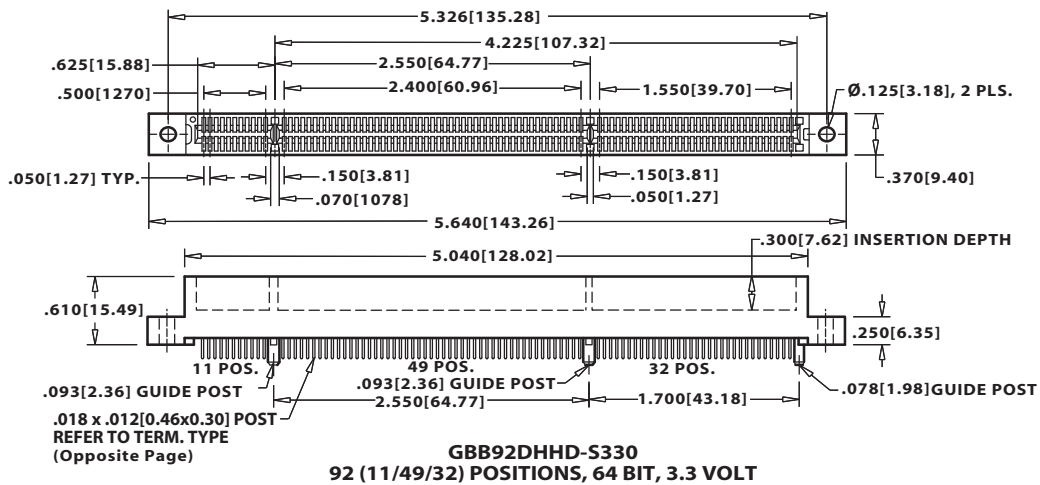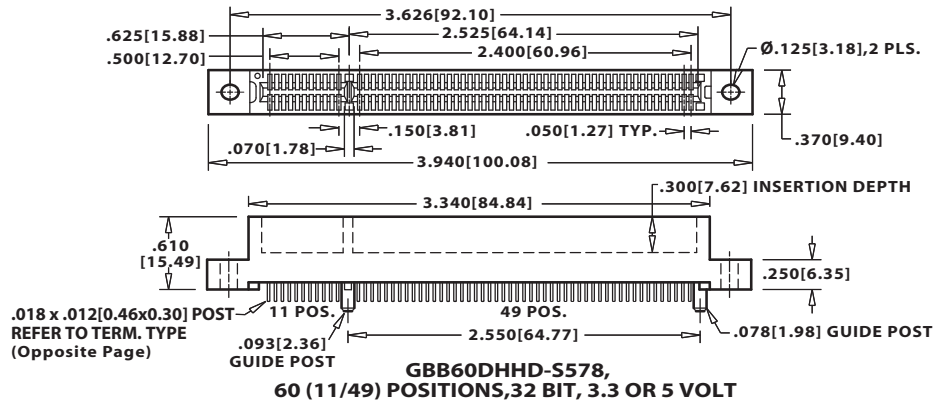



**.050" [1.27mm] Contact Centers, .610" [15.49 mm] Insulator Height
[PCI] Dip Solder/Card Extender/SMT**

Industry Standard Part

Sullins Edgecards

PART NUMBER OPTIONS

G B B 60 D HH D - S578

MATERIALS (Insulator/Contact)

- G = PA9T/Phosphor Bronze
- R = PPS/Phosphor Bronze
- J = PA9T/Beryllium Copper
- A = PPS/Beryllium Copper

CONTACT FINISH - RoHS Compliant

All platings are Lead Free and have .000050" Nickel underplate

- | | |
|------------------------|--------------------------|
| Contact Surface | Termination |
| B = .000010" Gold | .000100" Pure Tin, Matte |
| C = .000030" Gold | .000100" Pure Tin, Matte |

CONTACT CENTERS

- B = .050" [1.27mm]

NUMBER OF CONTACT POSITIONS

- 60 = 11/49 (32 Bit, 3.3 or 5 Volt)
- 92 = 11/49/32 (64 Bit, 3.3 Volt)
- or 92 = 49/11/32 (64 Bit, 5 Volt)

READOUT

- D = Dual

MODIFICATION (CONSULT FACTORY)

PCI WITH GUIDE POSTS

- *-S578 = 60 (11/49) Positions(32 Bit, 3.3 or 5 Volt)
- S330 = 92 (11/49/32) Positions(64 Bit, 3.3 Volt)
- S378 = 92 (49/11/32) Positions(64 Bit, 5 Volt)

PCI WITHOUT GUIDE POSTS

- *-S621 = 60 (11/49) Positions(32 Bit, 3.3 or 5 Volt)
- S329 = 92 (11/49/32) Positions(64 Bit, 3.3 Volt)
- S250 = 92 (49/11/32) Positions(64 Bit, 5 Volt)


* Turn connector or board 180° to switch from 3.3 to 5 volt

MOUNTING STYLE

- D = Flush Mounting
- N = No Mounting
- T = Flush Mounting With Threaded Insert
- Q = Straddle Mount (Card Extender Only)
- R = Metal Boardlocks


TERMINATION TYPE

- HH = Staggered Dip Solder
 - HR = Card Extender
 - HF = Surface Mount
 - HL = .250" [6.35mm] x .160" [4.06mm] Dip Solder
 - HN = .100" [2.54mm] x .125" [3.18mm] Dip Solder
- (REPLACES TERMINATIONS: CH, CR, CF, CL, CN)

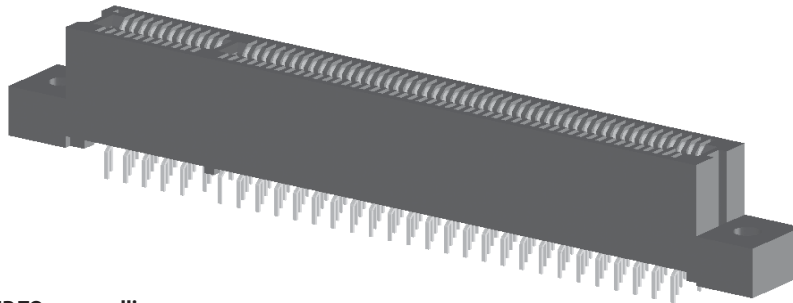

FOR PC BOARD LAYOUTS REFER TO www.sullinscorp.com

TERMINATION TYPE

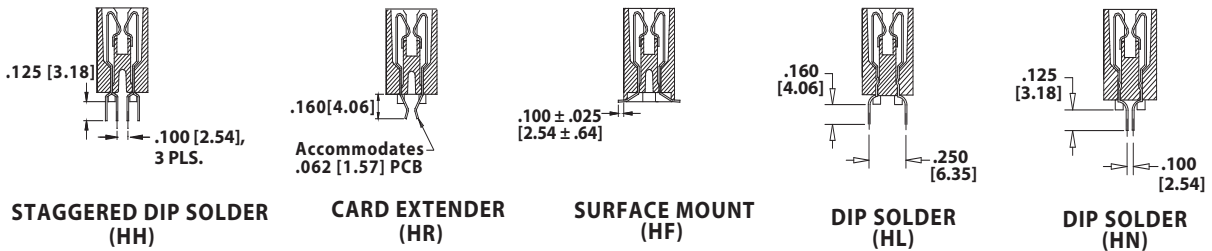

MOUNTING STYLE

