



Current Rating: 3 Amps  
 Insulator Resistance: 5000 Megohms min  
 Dielectric Withstanding: AC 1000 V  
 Operating Temperature: -40° ~ +105° C  
 Contact Material: Copper Alloy  
 Insulator Material: Polyester, UL 94V-0  
 Standard: PBT

Underplate: Nickel  
 Contact Area: 1u"~30u" Selective Gold  
 Solder Tails Area: 100u" Tin/Lead(Brighten Tin)or  
 100u" Tin/Lead Free(Brighten Tin/Matte Tin)

### AWHWXA-0X02-T-R

Plating:  
 5 - tin plated  
 2 - Quality Class III,  
 Flash gold selective

Number of Contacts:  
 10/14/16/20/26/34  
 40/50/60/64

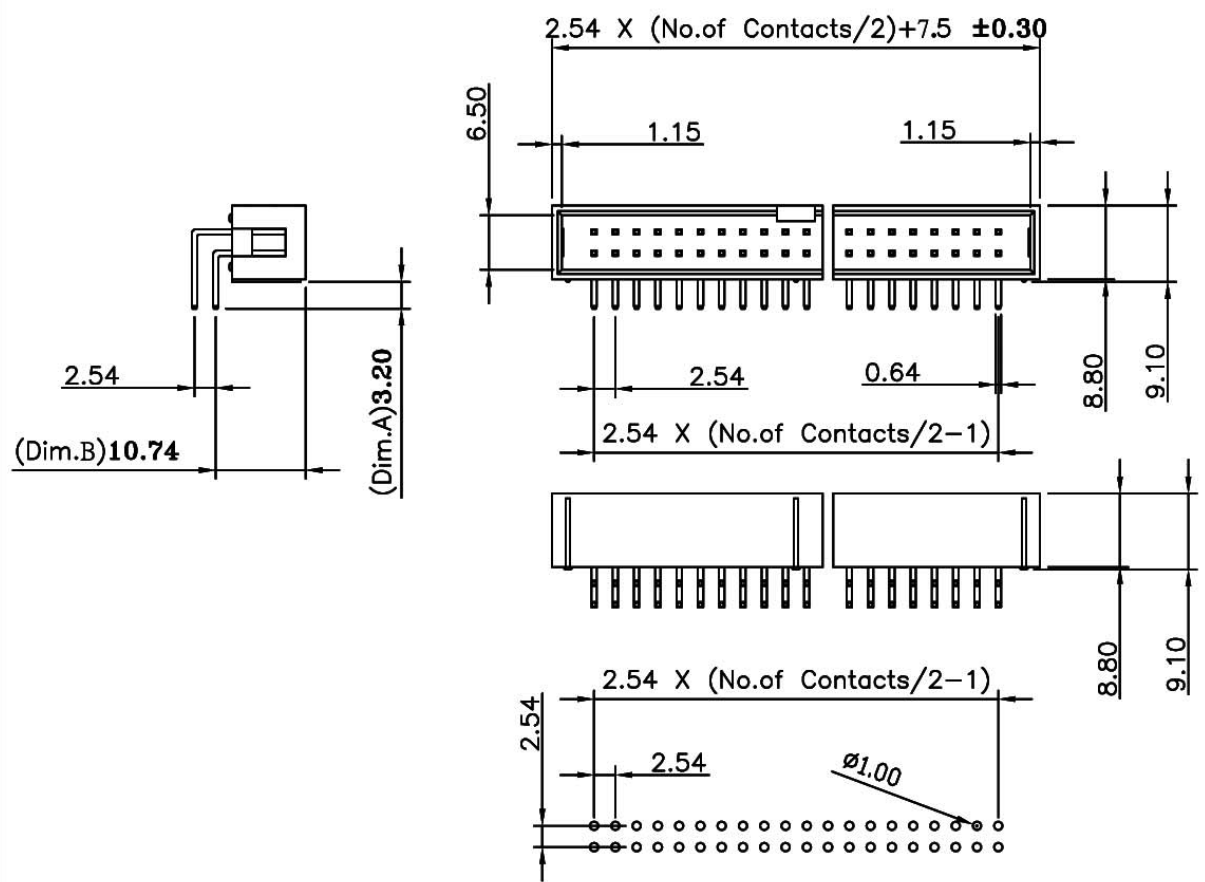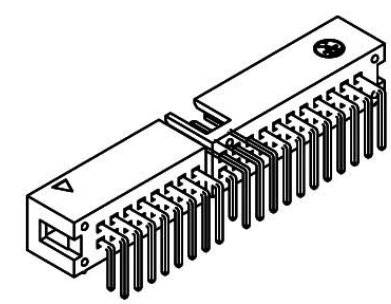

RECOMMENDED P.C.B LAYOUT  
 TOLERANCES: ±0.05mm

UNLESS OTHERWISE SPECIFIED TOLERANCE		±0.2		
SCALE: AS SHOWN	UNIT: mm			
DRAWN	JOE	12/19/05	DRAWN NAME: BOX HEADER (PITHC: 2.54mm) 1/2	
CHECKED		/ /		
APPROVED		/ /	PRODUCT NO. <b>AWHWXA-0X02-T-R</b>	
REV.			FILE NAME:	

A	ECN-0512106(Emily)	12/13/05	APPROVED						
REV.	DESCRIPTION	DATE	SIZE	REV.					