


PHYSICAL DIMENSIONS:

A	6.99 [.275]	+ 0.10 [.004]
B	5.72 [.225]	+ 0.10 [.004]
B ₁	6.73 [.265]	MAX
C	4.32 [.170]	+ 0.08 [.003]
C ₁	5.00 [.197]	MAX.
D	2.41 [.095]	+ 0.08 [.003]
E	0.89 [.035]	+ 0.13 [.005]
E ₁	1.91 [.075]	+ 0.13 [.005]

WIRE:

T ₁	1.91 [.075]	+ 0.25 [.010]
T ₂	0.38 [.015]	TYP.
T ₃	0.38 [.015]	TYP.

CM2722R800R-10

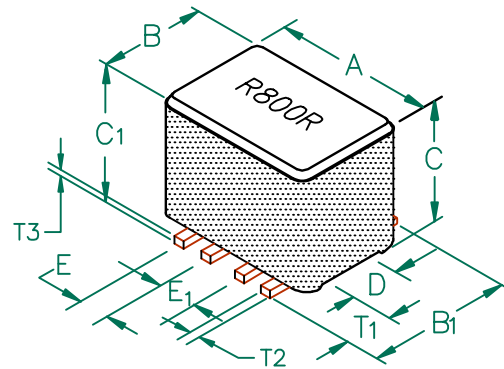

ELECTRICAL CHARACTERISTICS:


Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	80	
Minimum	64	
Maximum	-	0.02
		5,000 mA

NOTES: UNLESS OTHERWISE SPECIFIED


1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 17" REELS, 1000 PCS PER REEL.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. REF. CARRIER TAPE SPECIFICATION # CART2722-OP.

OBSOLETE


LAND PATTERNS FOR REFLOW SOLDERING

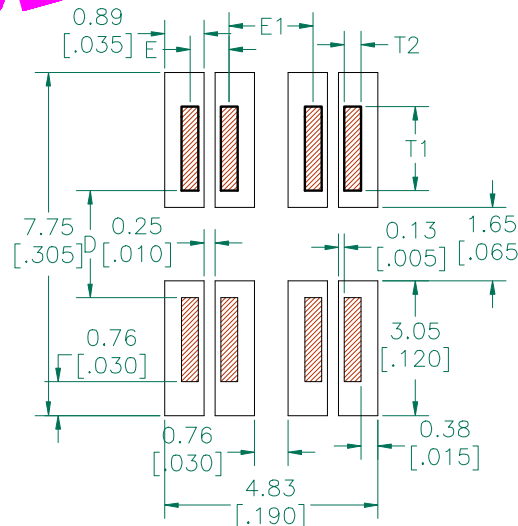


RECOMMENDED SOLDERING CONDITIONS

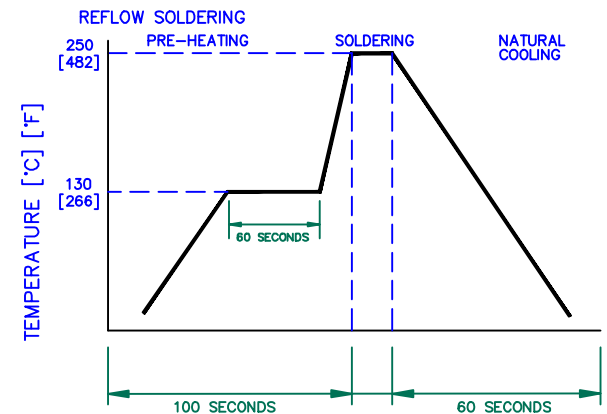

Z vs. FREQUENCY (C,O,N)

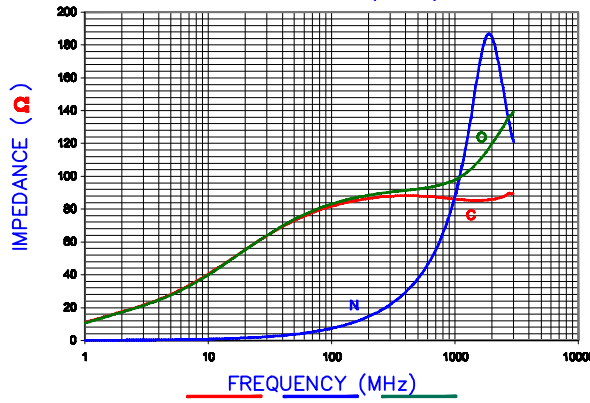

Z, R, XL vs. FREQUENCY

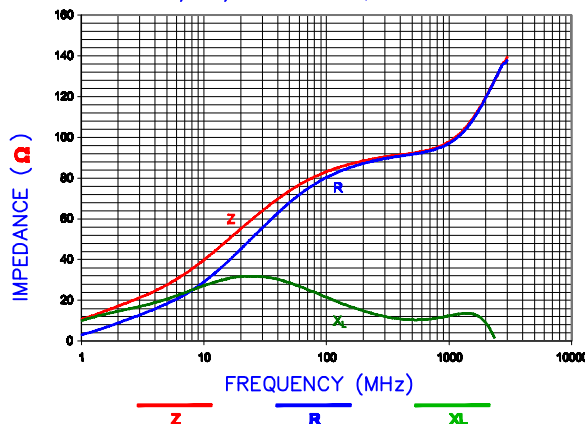

DIMENSIONS ARE IN mm (INCHES).				THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.					
				Steward		PROJECT/PART NUMBER:	REV:	PART TYPE:	DRAWN BY:
						CM2722R800R-10	A	ASSEMBLY	JRK
DATE: 10/06/03				SCALE: NTS		SHEET:			
A	ORIGINAL DRAFT	10/06/03	JRK	CAD #	CM2722R800R-10-A	TOOL #	H0275-0	2 of 3	
REV	DESCRIPTION	DATE	INT						