


CM6032V201R-10

PHYSICAL DIMENSIONS:

A	15.24	[.600]	± 0.23	[.009]
B	8.13	[.320]	± 0.13	[.005]
B ₁	10.92	[.430]	MAX	
C	9.45	[.372]	± 0.15	[.006]
C ₁	10.08	[.397]	MAX	
D	4.06	[.160]	± 0.05	[.002]
E	1.27	[.050]	± 0.13	[.005]
E ₁	2.03	[.080]	± 0.13	[.005]

WIRE DIMENSIONS:

T ₁	3.30	[.130]	± 0.38	[.015]
T ₂	0.64	[.025]	TYP	
T ₃	0.38	[.015]	TYP	

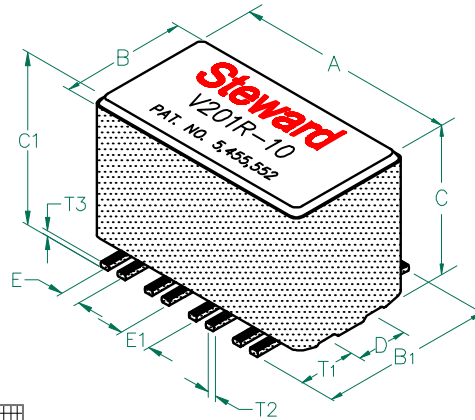

ELECTRICAL CHARACTERISTICS:


Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	200	
Minimum	150	
Maximum	250	8,000 mA

NOTES: UNLESS OTHERWISE SPECIFIED


1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 13" REELS, 250 PCS/REEL.
2. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.
3. CARRIER TAPE SPECIFICATION # CART6032-23.
4. TERMINATION FINISH IS 100% TIN.
5. THIS PART HAS NO PIN POLARITY.

OBSOLETE


LAND PATTERNS FOR REFLOW SOLDERING

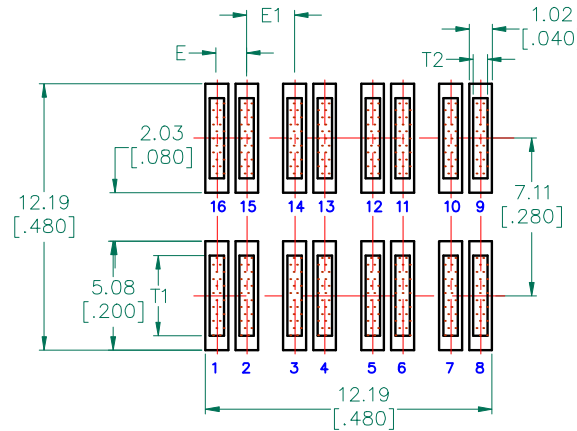


RECOMMENDED SOLDERING CONDITIONS

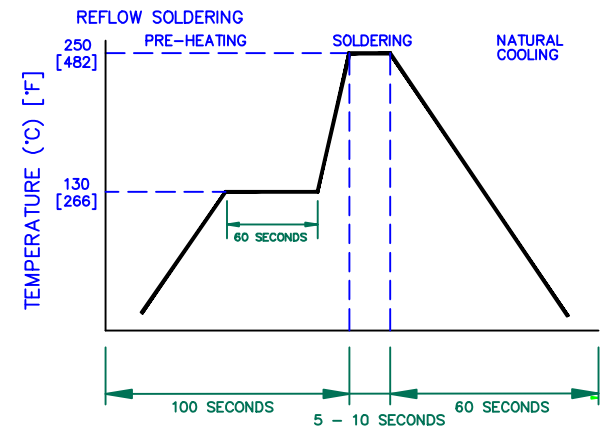

Z vs. FREQUENCY (C,O,N)

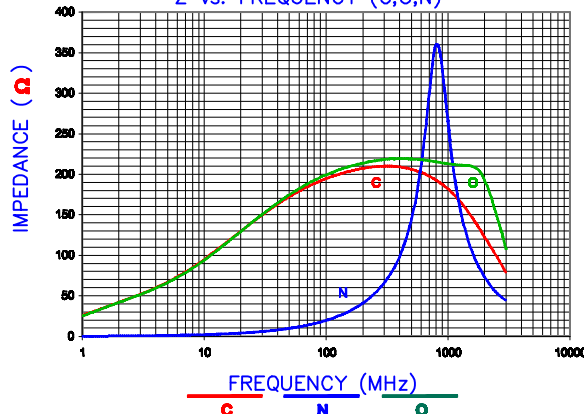

Z, R, XL vs. FREQUENCY

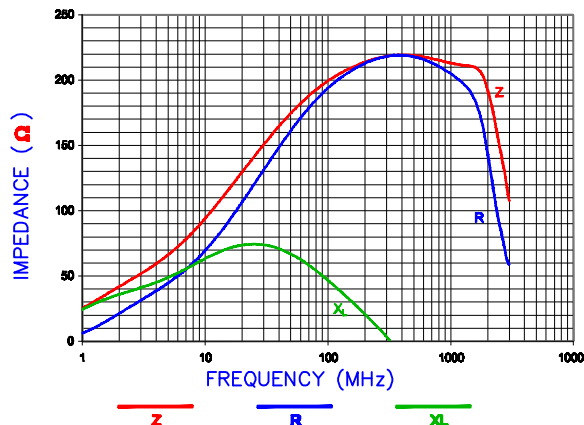

DIMENSIONS ARE IN mm [INCHES]				THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.			
				Steward			
				PROJECT/PART NUMBER: CM6032V201R-10		REV B	DRAWN BY: JRK
B	CORRECT REV BLOCK mm [INCHES]	10/20/06	JRK	DATE: 06/11/04	SCALE: NTS	SHEET: 2 of 3	
A	ORIGINAL DRAFT	06/11/04	JRK	CAD #	TOOL #	H0600-200	
REV	DESCRIPTION	DATE		CM6032V201R-10-B-2			