


# DA1206B601R-10

## PHYSICAL DIMENSIONS:

A	3.20 [.126]	+ 0.20 [.008]
B	1.60 [.063]	+ 0.20 [.008]
C	0.80 [.031]	+ 0.20 [.008]
D	0.40 [.016]	+ 0.15 [.006]
D1	0.20 [.008]	+ 0.10 [.004]
E	0.80 [.031]	+ 0.10 [.004]

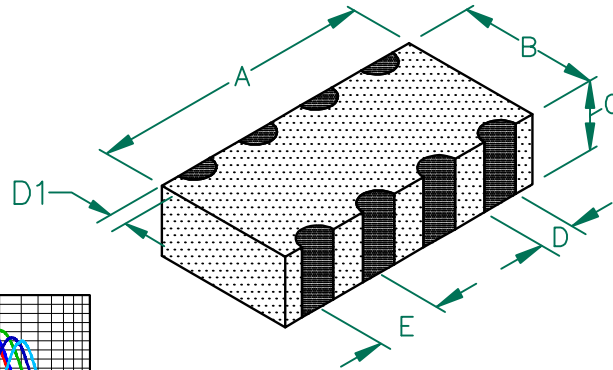



## ELECTRICAL CHARACTERISTICS:

Z @ 100MHz ( $\Omega$ )	DCR ( $\Omega$ )	Rated Current
Nominal	600	
Minimum	450	
Maximum	750	0.35
		200 mA


LINE TO LINE INSULATION RESISTANCE  
>100 M $\Omega$  AT 75 VOLTS.

NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 3000 PCS/REEL EMBOSSED PLASTIC TAPE.
2. TERMINATION FINISH IS 100% TIN.
3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.

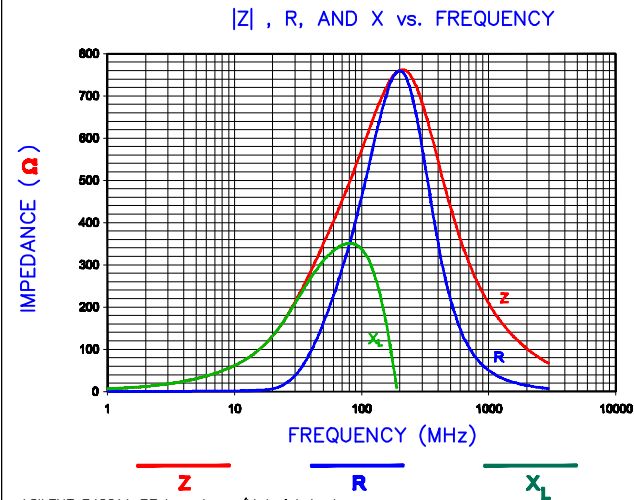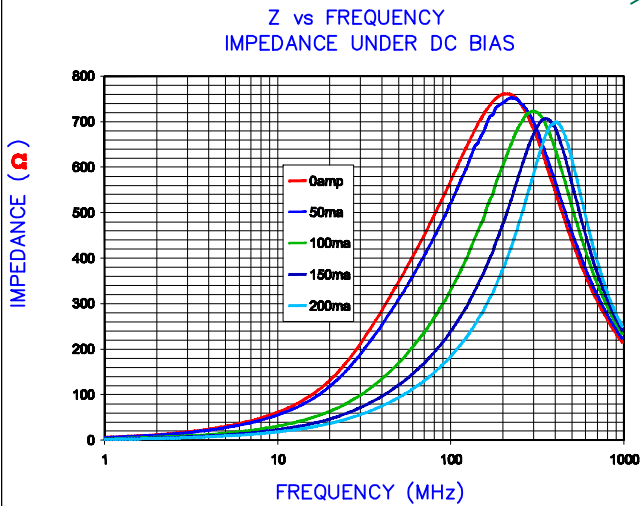


## LAND PATTERNS FOR REFLOW SOLDERING

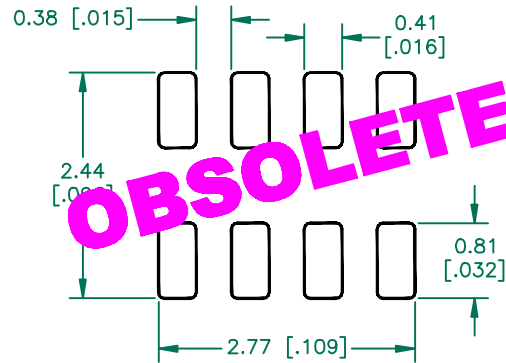

(For wave soldering, add 0.762 (0.030) to this dimension)

## RECOMMENDED SOLDERING CONDITIONS

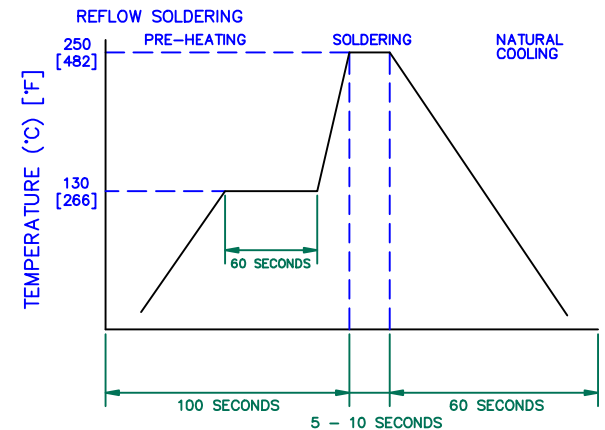

DIMENSIONS ARE IN mm [INCHES].		THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.			
		<b>Steward</b>			
PROJECT/PART NUMBER:		REV	PART TYPE:	DRAWN BY:	
DA1206B601R-10		B	CO-FIRE	TMB	
B	CHANGE DCR, MODIFY NOTE 1 ADD ROHS	11/30/06	JRK	DATE:	03/30/04
A	ORIGINAL DRAFT	03/30/04	TMB	SCALE:	NTS
REV	DESCRIPTION	DATE	INT	CAD #	DA1206B601R-10-B
				TOOL #	-
				SHEET: 2 of 2	