


# DA1206D301R-10

## PHYSICAL DIMENSIONS:



A	3.20 [.126]	+ 0.20 [.008]
B	1.60 [.063]	+ 0.20 [.008]
C	0.80 [.031]	+ 0.20 [.008]
D	0.40 [.016]	+ 0.15 [.006]
D1	0.20 [.008]	+ 0.10 [.004]
E	0.80 [.031]	+ 0.10 [.004]

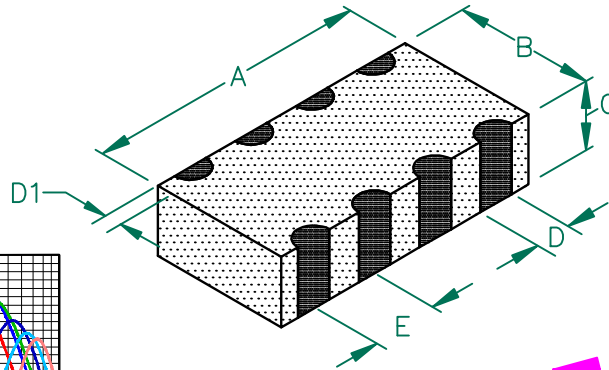

## ELECTRICAL CHARACTERISTICS:


	Z @ 100MHz ( $\Omega$ )	DCR ( $\Omega$ )	Rated Current
Nominal	300		
Minimum	225		
Maximum	375	0.4	400 mA

LINE TO LINE INSULATION RESISTANCE  
>100 M $\Omega$  AT 75 VOLTS.

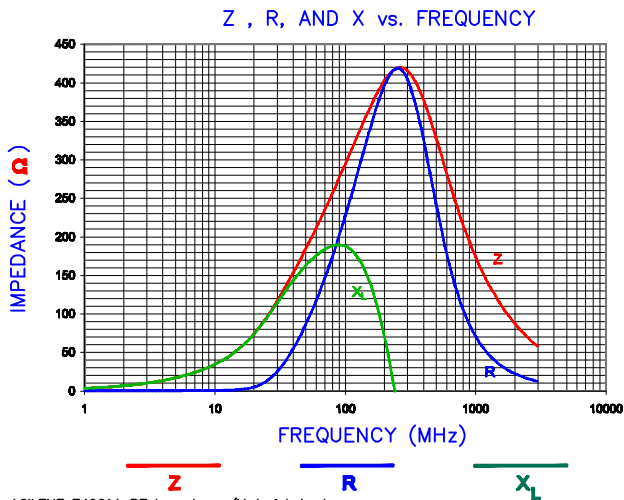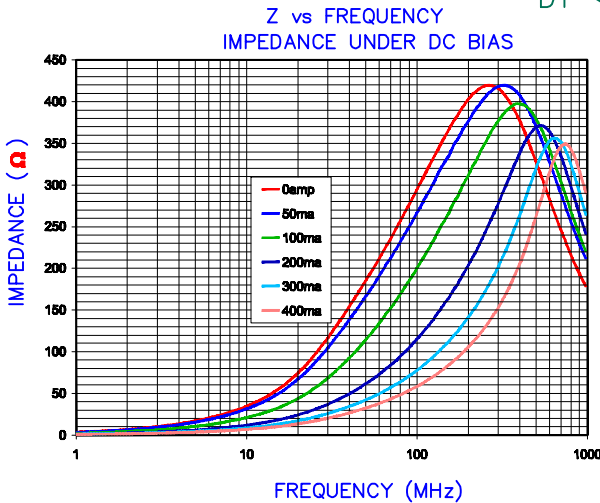


**OBSOLETE**

## LAND PATTERNS FOR REFLOW SOLDERING

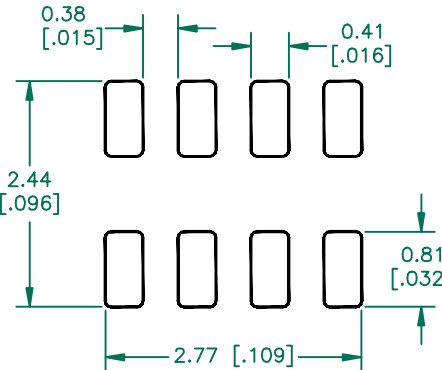

(For wave soldering, add 0.762 (0.030) to this dimension)

## RECOMMENDED SOLDERING CONDITIONS

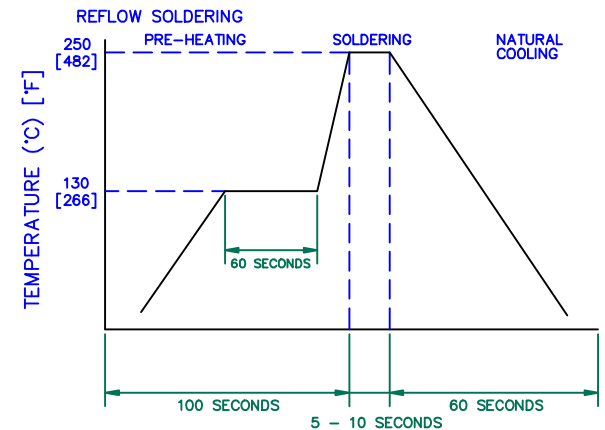

DIMENSIONS ARE IN mm [INCHES].				THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.			
				<b>Steward</b>			
PROJECT/PART NUMBER:		REV	PART TYPE:	DRAWN BY:			
DA1206D301R-10		A	CO-FIRE	TMB			
DATE:		SCALE:	SHEET:				
03/30/04		NTS	2 of 2				
REV	DESCRIPTION	DATE	INT	TOOL #			
A	ORIGINAL DRAFT	03/30/04	TMB	-			