


HZ0603B751R-10

PHYSICAL DIMENSIONS:

A	1.60 [.063]	+ 0.15 [.006]	- 0.15 [.006]
B	0.80 [.031]	+ 0.15 [.006]	- 0.15 [.006]
C	0.80 [.031]	+ 0.15 [.006]	- 0.15 [.006]
D	0.36 [.014]	+ 0.15 [.006]	- 0.15 [.006]


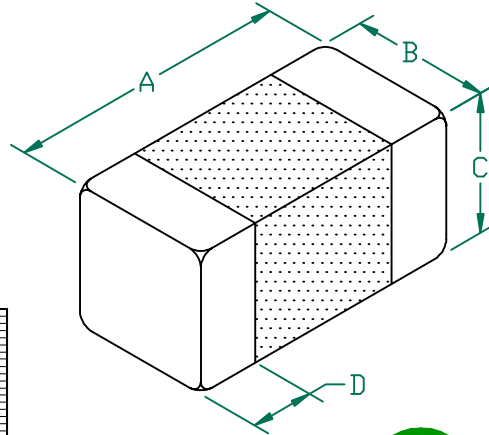


ELECTRICAL CHARACTERISTICS:

	Z @ 100MHz (Ω)	DCR (Ω)	Rated Current
Nominal	750		
Minimum	563		
Maximum	938	0.600	200 mA


NOTES: UNLESS OTHERWISE SPECIFIED

1. TAPED AND REELED per CURRENT EIA SPECIFICATIONS 7" REELS, 4000 PCS/REEL.
2. TERMINATION FINISH 100% TIN.
3. COMPONENTS SHOULD BE ADEQUATELY PREHEATED BEFORE SOLDERING.

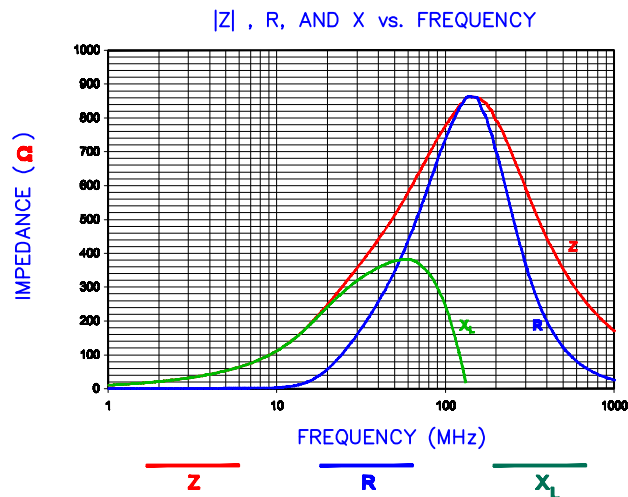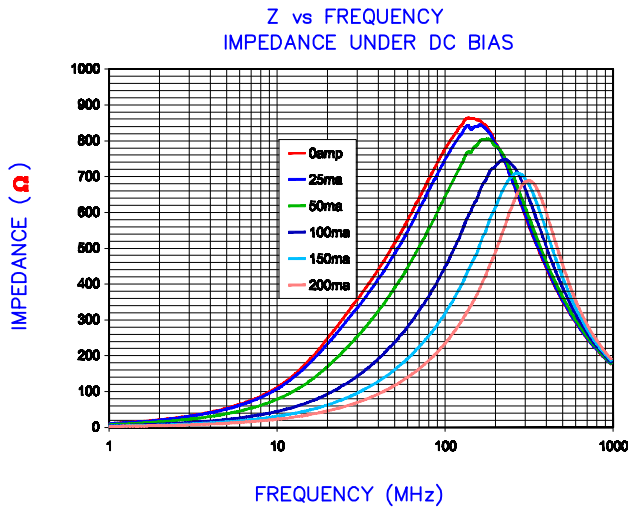


OBsolete

LAND DIMENSIONS FOR REFLOW SOLDERING

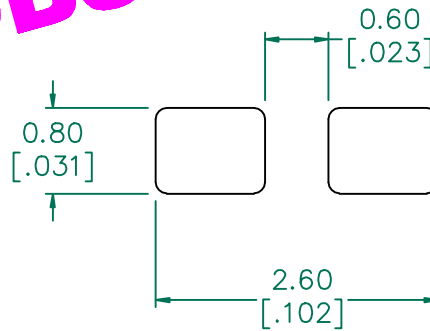

(For wave soldering, add 0.762 [.030] to this dimension)

RECOMMENDED SOLDERING CONDITIONS

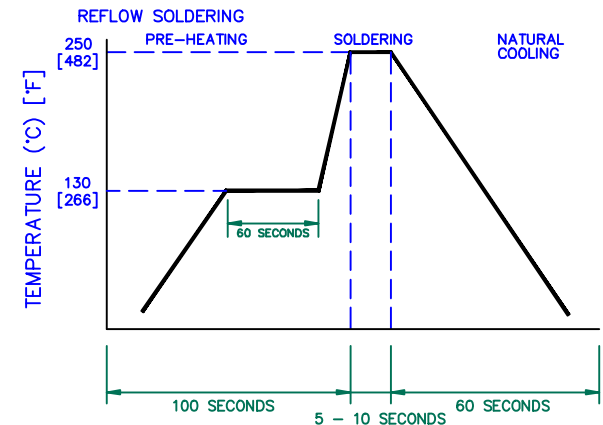

DIMENSIONS ARE IN mm [INCHES].				THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY AND CONFIDENTIAL TO STEWARD. NO PRODUCTION OR PUBLICATION OF THIS DOCUMENT IN WHOLE OR IN PART SHALL BE MADE WITHOUT WRITTEN AUTHORIZATION FROM STEWARD.				
				Steward				
				PROJECT/PART NUMBER:	REV	PART TYPE:	DRAWN BY:	
				HZ0603B751R-10		A	CO-FIRE	JRK
				DATE:	04/16/04	SCALE:	-	SHEET:
A	ORIGINAL DRAFT	04/16/04	JRK	CAD #	HZ0603B751R-10-A	TOOL #	-	2 of 2
REV	DESCRIPTION	DATE	INT					