

# International IOR Rectifier

## SCHOTTKY RECTIFIER

STPS20L15GPbF

20 Amps

$$I_{F(AV)} = 20 \text{ Amp}$$

$$V_R = 15V$$


**Major Ratings and Characteristics**

Characteristics	Values	Units
$I_{F(AV)}$ Rectangular waveform	20	A
$V_{RRM}$	15	V
$I_{FSM}$ @ $t_p = 5 \mu s$ sine	700	A
$V_F$ @19 Apk, $T_J = 125^\circ C$ (Typical)	0.25	V
$T_J$ range	-55 to 125	$^\circ C$

**Description/ Features**

The Schottky rectifier module has been optimized for ultra low forward voltage drop specifically for the OR-ing of parallel power supplies. The proprietary barrier technology allows for reliable operation up to 125  $^\circ C$  junction temperature. Typical applications are in parallel switching power supplies, converters, reverse battery protection, and redundant power sub-systems.

- 125 $^\circ C$   $T_J$  operation ( $V_R < 5V$ )
- Center tap module
- Optimized for OR-ing applications
- Ultra low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Lead-Free ("PbF" suffix)

**Case Styles****D<sup>2</sup>PAK**

# STPS20L15GPbF

Bulletin PD-21049 rev. B 01/07

International  
**IOR** Rectifier

## Voltage Ratings

Part number	STPS20L15GPbF
$V_R$ Max. DC Reverse Voltage (V) @ $T_J = 100^\circ\text{C}$	15
$V_{RWM}$ Max. Working Peak Reverse Voltage (V) @ $T_J = 100^\circ\text{C}$	

## Absolute Maximum Ratings

Parameters	Values	Units	Conditions	
I <sub>F(AV)</sub> Max. Average Forward Current * See Fig. 5	20	A	50% duty cycle @ T <sub>C</sub> = 85°C, rectangular wave form	
I <sub>FSM</sub> Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 7	700	A	5μs Sine or 3μs Rect. pulse	Following any rated load condition and with rated V <sub>RRM</sub> applied
	330		10ms Sine or 6ms Rect. pulse	
E <sub>AS</sub> Non-Repetitive Avalanche Energy	10	mJ	T <sub>J</sub> = 25°C, I <sub>AS</sub> = 2 Amps, L = 6 mH	
I <sub>AR</sub> Repetitive Avalanche Current	2	A	Current decaying linearly to zero in 1 μsec Frequency limited by T <sub>J</sub> max. V <sub>A</sub> = 1.5 x V <sub>R</sub> typical	

## Electrical Specifications

Parameters		Values		Units	Conditions	
V <sub>FM</sub> Forward Voltage Drop * See Fig. 1 (1)		Typ.	Max.			
		-	0.41	V	@ 19A	T <sub>J</sub> = 25 °C
		-	0.52	V	@ 40A	
		0.25	0.33	V	@ 19A	T <sub>J</sub> = 125 °C
		0.37	0.50	V	@ 40A	
I <sub>RM</sub> Reverse Leakage Current * See Fig. 2 (1)		-	10	mA	T <sub>J</sub> = 25 °C	V <sub>R</sub> = rated V <sub>R</sub>
		-	600	mA	T <sub>J</sub> = 100 °C	
V <sub>F(TO)</sub> Threshold Voltage		0.182		V	T <sub>J</sub> = T <sub>J</sub> max.	
r <sub>t</sub> Forward Slope Resistance		7.6		mΩ		
C <sub>T</sub> Max. Junction Capacitance		-	2000	pF	V <sub>R</sub> = 5V <sub>DC</sub> ; (test signal range 100Khz to 1Mhz) 25°C	
L <sub>S</sub> Typical Series Inductance		8	-	nH	Measured lead to lead 5mm from package body	
dv/dt Max. Voltage Rate of Change		10000		V/ μs	(Rated V <sub>R</sub> )	

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

## Thermal-Mechanical Specifications

Parameters			Values	Units	Conditions
T <sub>J</sub>	Max. Junction Temperature Range		-55 to 125	°C	
T <sub>stg</sub>	Max. Storage Temperature Range		-55 to 150	°C	
R <sub>thJC</sub>	Max. Thermal Resistance Junction to Case		1.5	°C/W	DCoperation * See Fig.4
R <sub>thCS</sub>	Typical Thermal Resistance Case to Heatsink		0.50	°C/W	Mounting surface, smooth and greased For TO-220
R <sub>thJA</sub>	Max. Thermal Resistance Junction to Ambient		40	°C/W	DC operation For D <sup>2</sup> Pak
wt	Approximate Weight		2(0.07)	g(oz.)	
T	Mounting Torque	Min.	6(5)	Kg-cm (lbf-in)	Non-lubricated threads
		Max.	12(10)		
Marking Device			STPS20L15G		

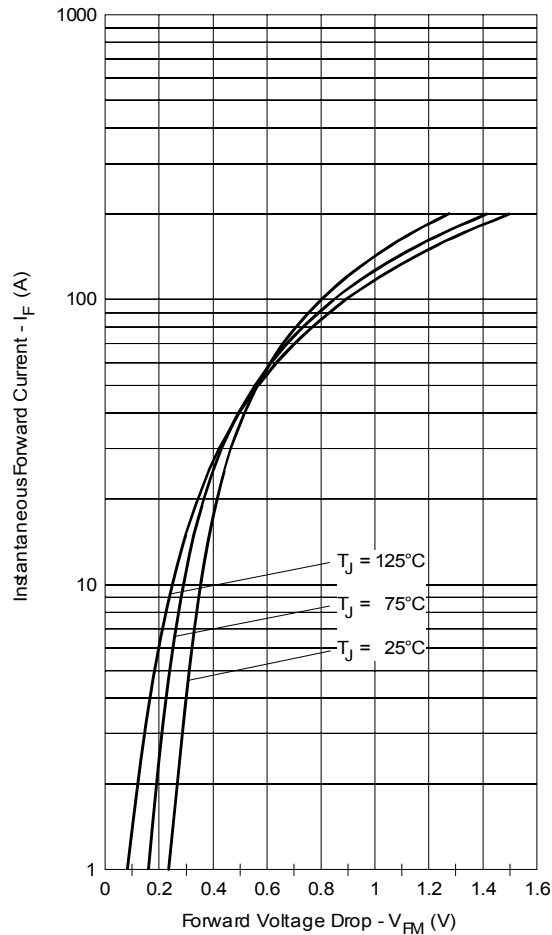


Fig. 1 - Maximum Forward Voltage Drop Characteristics

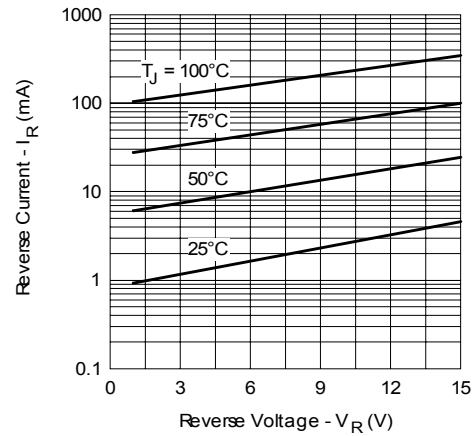


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

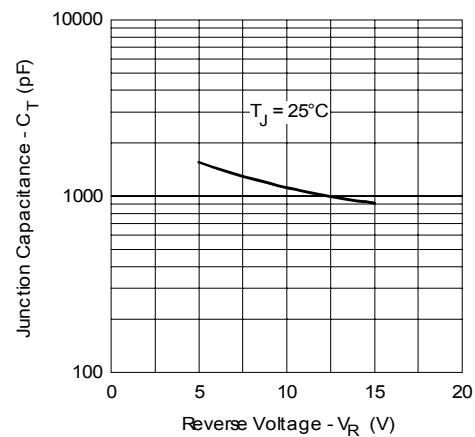


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

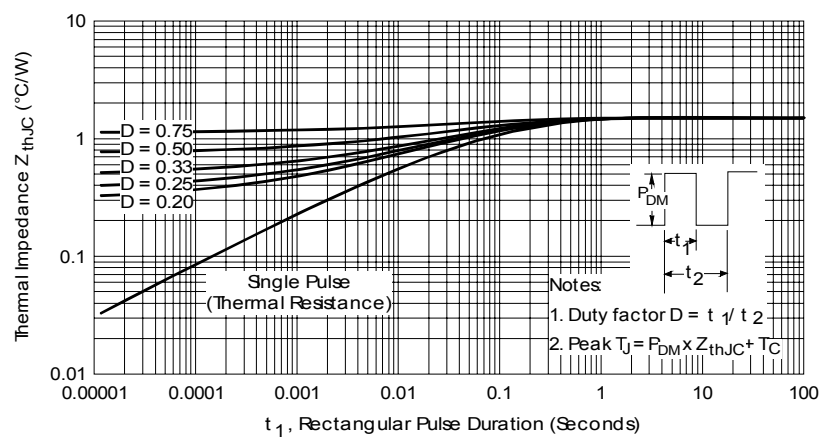


Fig. 4 - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics

# STPS20L15GPbF

Bulletin PD-21049 rev. B 01/07

International  
**IOR** Rectifier

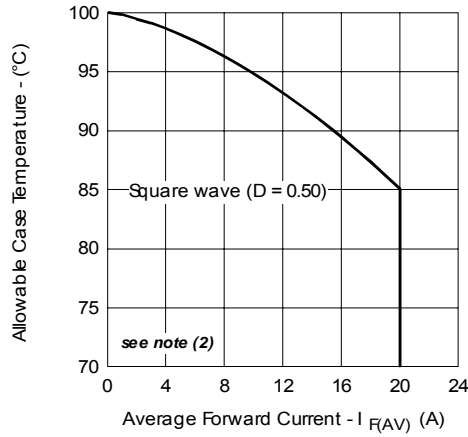


Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

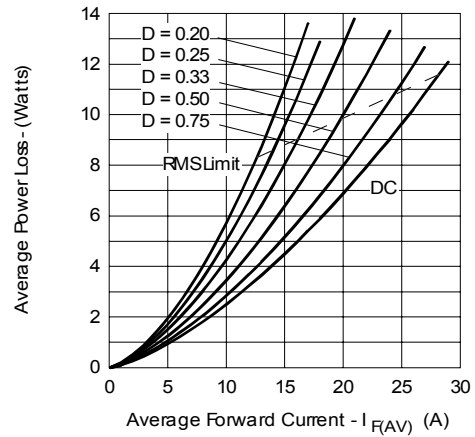


Fig. 6 - Forward Power Loss Characteristics

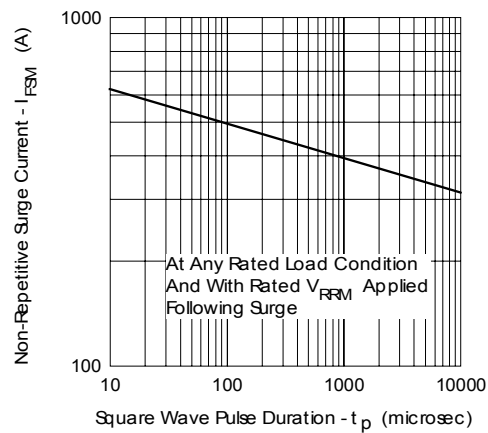


Fig. 7 - Maximum Non-Repetitive Surge Current

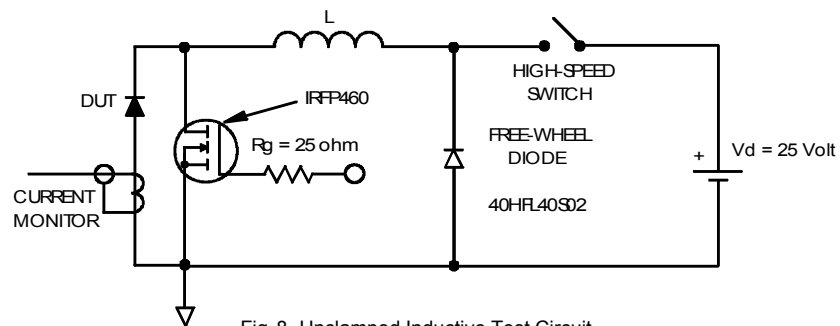



Fig. 8 - Unclamped Inductive Test Circuit

(2) Formula used:  $T_c = T_j - (P_d + P_{d_{REV}}) \times R_{thJC}$ ;


$P_d$  = Forward Power Loss =  $I_{F(AV)} \times V_{FM} @ (I_{F(AV)} / D)$  (see Fig. 6);

$P_{d_{REV}}$  = Inverse Power Loss =  $V_{R1} \times I_{R1} (1 - D)$ ;  $I_R @ V_{R1} = 80\%$  rated  $V_R$

## Outline Table

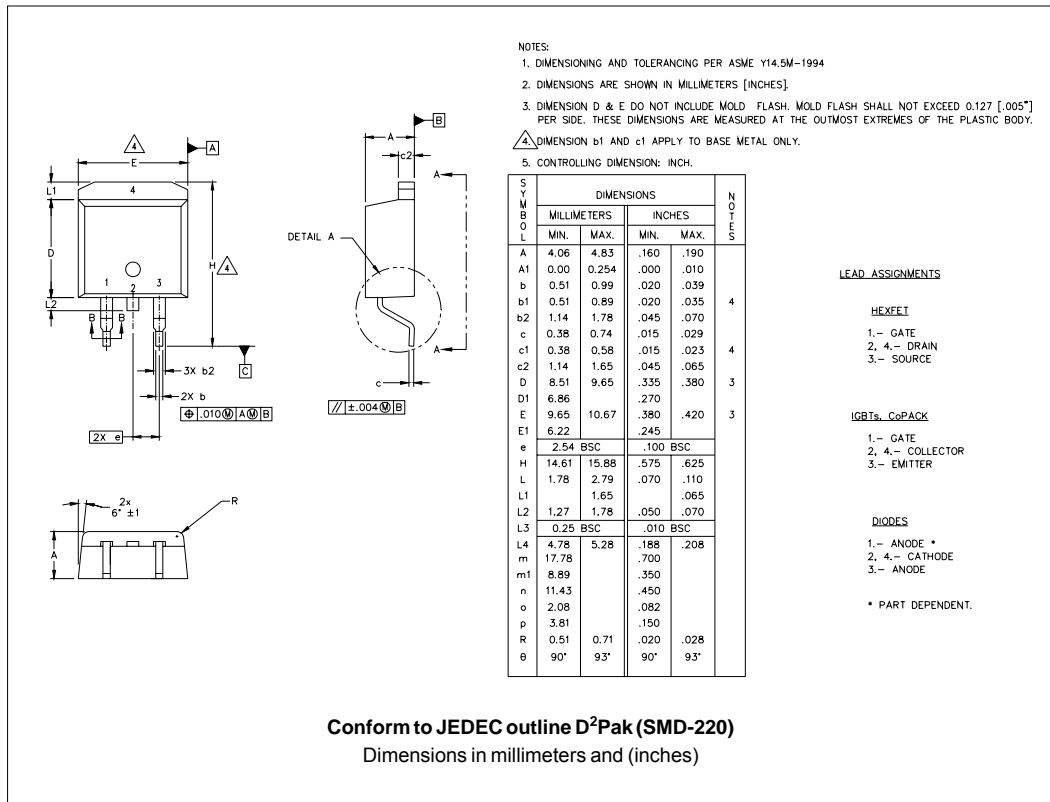

## Part Marking Information

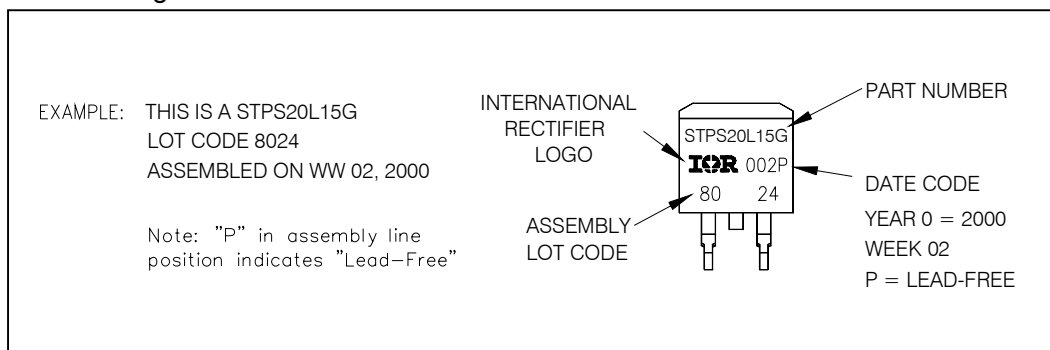



## Ordering Information Table

Device Code						
	STPS	20	L	15	G	TRL PbF
	①	②	③	④	⑤	⑥ ⑦
<b>1</b>	-	Essential Part Number				
<b>2</b>	-	Current Rating (20 = 20A)				
<b>3</b>	-	Low Voltage				
<b>4</b>	-	Voltage Rating (15 = 15V)				
<b>5</b>	-	G = D <sup>2</sup> Pak package				
<b>6</b>	-	<ul style="list-style-type: none"> <li>• none = Tube (50 pieces)</li> <li>• TRL = Tape &amp; Reel (Left Oriented)</li> <li>• TRR = Tape &amp; Reel (Right Oriented)</li> </ul>				
<b>7</b>	-	<ul style="list-style-type: none"> <li>• none = Standard Production</li> <li>• PbF = Lead-Free (for D<sup>2</sup>Pak tube)</li> <li>• P = Lead-Free (for D<sup>2</sup>Pak TRR and TRL)</li> </ul>				

Data and specifications subject to change without notice.  
 This product has been designed and qualified for Industrial Level and Lead-Free.  
 Qualification Standards can be found on IR's Web site.



### Notice

The products described herein were acquired by Vishay Intertechnology, Inc., as part of its acquisition of International Rectifier's Power Control Systems (PCS) business, which closed in April 2007. Specifications of the products displayed herein are pending review by Vishay and are subject to the terms and conditions shown below.

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.

International Rectifier®, IR®, the IR logo, HEXFET®, HEXSense®, HEXDIP®, DOL®, INTERO®, and POWIRTRAIN® are registered trademarks of International Rectifier Corporation in the U.S. and other countries. All other product names noted herein may be trademarks of their respective owners.