

Specification Status: Released

Maximum Operating Voltage: 250V_{DC}

Fault Ratings at 20°C:

- 250V_{RMS}, 3A, 10 applications
- 600V_{RMS}, 60A, 1 application

Additional Info at 20°C:


- Resistance matched: 0.5 Ohm
- Lightning withstand: GR-10891.0 kV, 10/1000µs, with 20 ohm load
- Helps equipment comply to Telcordia GR-1089

Lead Material:

22 AWG Sn-Plated Copper (0.64 mm [0.025"] nominal diameter)

External Coating Material:

Cured, flame retardant epoxy polymer, meeting UL94 V-0 requirements

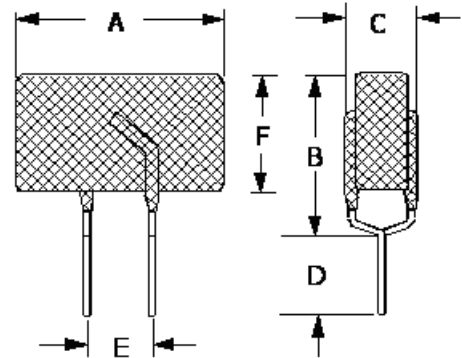

Marking:

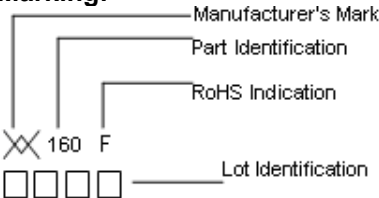


TABLE I. DIMENSIONS:

	A		B		C		D		E	F
	MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	NOM	MAX
mm:	--	16.0	--	12.6	--	6.0	4.7	--	5.0	10.0
in*:	--	(0.63)	--	(0.50)	--	(0.24)	(0.19)	--	(0.20)	(0.39)

* Rounded off approximation

TABLE II. PERFORMANCE RATINGS @ 20°C (as measured in Loranger P/N 02901-032-6218A):

HOLD CURRENT (A)	TRIP CURRENT (A)	RESISTANCE (Ω)			TIME TO TRIP(Sec) @ 1A		OPERATING TEMPERATURE (°C)		TRIPPED POWER DISSIPATION (W) @ 250V _{DC}	
		R MIN	R MAX	R _{1MAX} *	TYP	MAX	MIN	MAX	TYP	MAX
0.160	0.320	4.0	7.0	16.0	9.5	18.0	-40	85	1.7	2.2

*Post Trip Resistance measured after one hour.

TABLE III. APPLICABLE PART DESCRIPTIONS:

PART DESCRIPTION	PACKAGING TYPE	NOTE
TRF600-160-RA-B-0.5	Bulk	N/A
TRF600-160-RA-B-0.5-2	Tape and Reel	Dim "D" not applicable

Agency Recognitions:
Reference Documents:
Precedence:
Effectivity:
CAUTION:

UL (File #E74889), CSA (File #1026908), TUV
Raychem PS300, Telcordia GR-1089
This specification takes precedence over documents referenced herein.
Reference documents shall be the issue in effect on the date of invitation for bid.
Operation beyond the rated voltage or current may result in rupture, electrical arcing or flame.

Materials Information
ROHS Compliant

ELV Compliant

Pb-Free

