

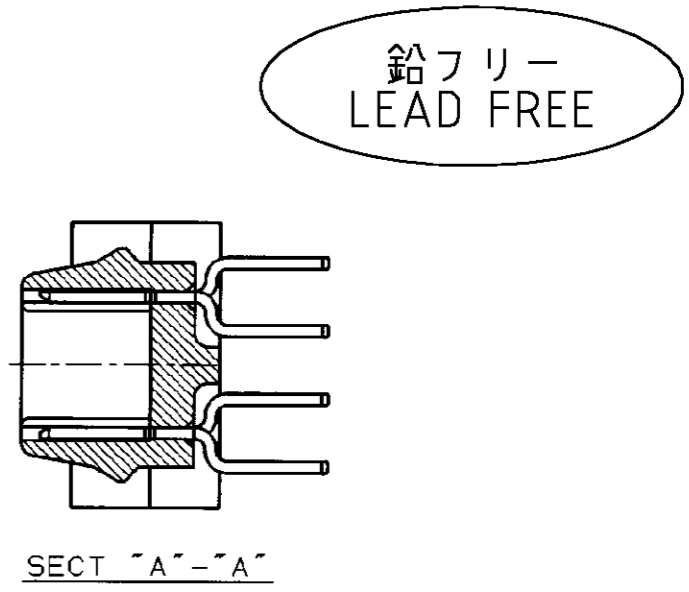
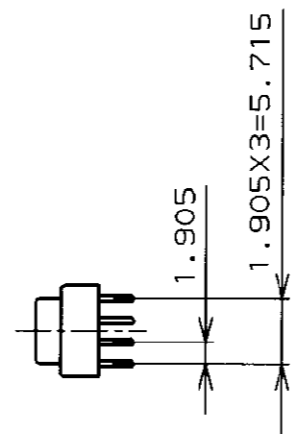


NUMBER C-5917628
METRIC
③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭ ⑮ ⑯ ⑰ ⑱ ⑲ ⑳ ㉑ ㉒ ㉓ ㉔ ㉕ ㉖ ㉗ ㉘ ㉙ ㉚ ㉛ ㉜ ㉝ ㉞ ㉟ ㊱ ㊲ ㊳ ㊴ ㊵ ㊶ ㊷ ㊸ ㊹ ㊺ ㊻ ㊼ ㊽ ㊾ ㊿

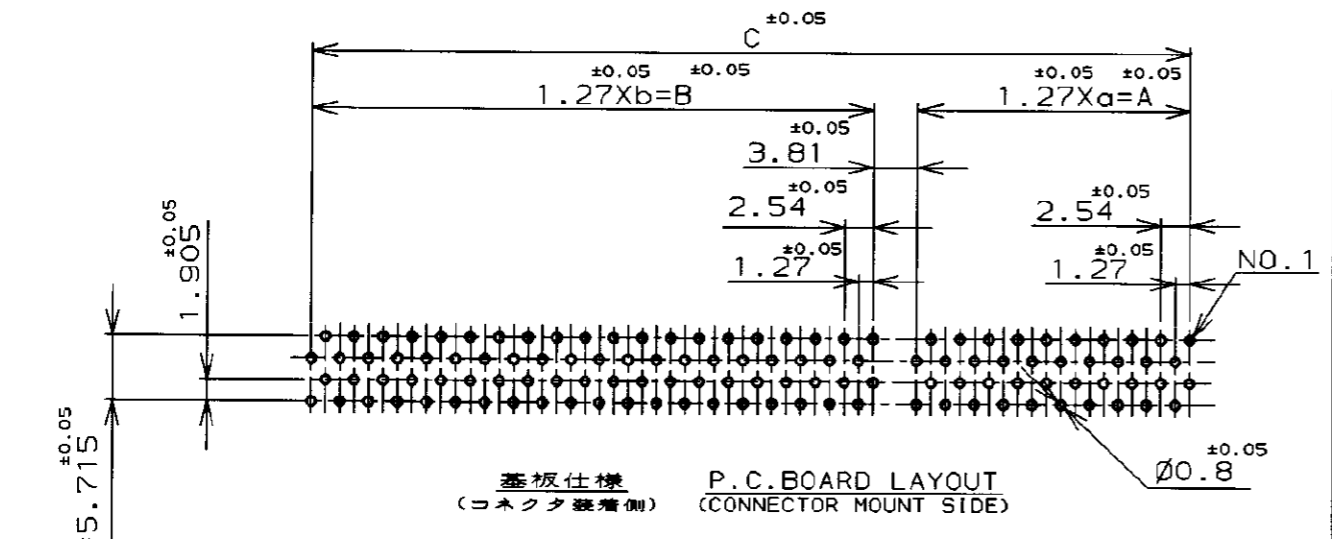

注記:
 ① 材料:ハウジング;熱可塑性樹脂 (UL 94V-0) 色:黒
 コンタクト:銅合金
 ② 表面仕上げ:
 コンタクト:全面ニッケル下地めっき
 接触部金めっき、脚部すずめっき
 3. 本製品はフラックス上がり防止処理済み

NOTE:
 ① MATERIAL:HOUSING;THERMOPLASTICS (UL 94V-0) BLACK
 CONTACT:COPPER ALLOY
 ② FINISH:CONTACT:Au AT CONTACT AREA
 TIN AT TINE, OVER Ni
 3. THESE PRODUCTS WERE COATED BY ANTI-FLUX MIGRATION AGENT.

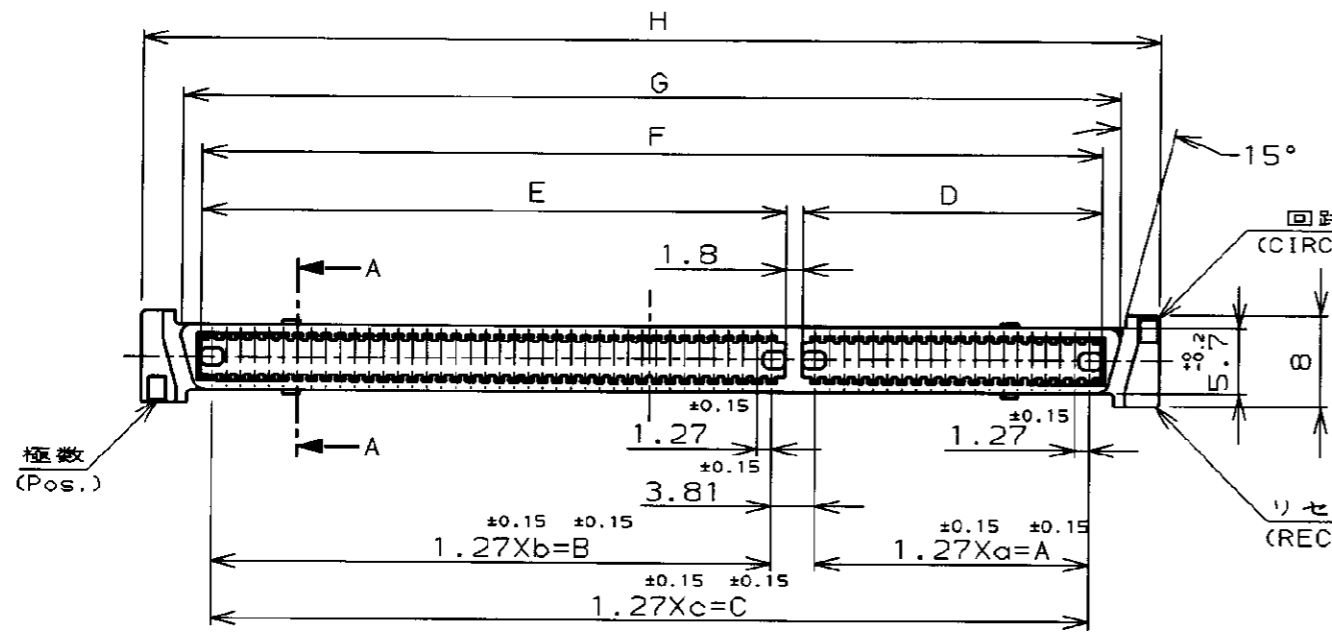

29	36.83	49	62.23	—	102.87	38.83	64.23	104.87	107.96	115.49	0.76μm	160	2-	—	-7
—	—	—	—	39	49.53	—	—	51.53	54.62	62.15	0.76μm	80	2-	—	-3
39	49.53	49	62.23	—	115.57	51.53	64.23	117.57	120.66	128.19	0.3μm	180	—	—	-8
29	36.83	49	62.23	—	102.87	38.83	64.23	104.87	107.96	115.49	0.3μm	160	—	—	-7
29	36.83	39	49.53	—	90.17	38.83	51.53	92.17	95.26	102.79	0.3μm	140	—	—	-6
19	24.13	39	49.53	—	77.47	26.13	51.53	79.47	82.56	90.09	0.3μm	120	—	—	-5
—	—	—	—	49	62.23	—	—	64.23	67.32	74.85	0.3μm	100	—	—	-4
—	—	—	—	39	49.53	—	—	51.53	54.62	62.15	0.3μm	80	—	—	-3
—	—	—	—	29	36.83	—	—	38.83	41.92	49.45	0.3μm	60	—	—	-2
—	—	—	—	19	24.13	—	—	26.13	29.22	36.75	0.3μm	40	—	—	-1
a	A	b	B	c	C	D	E	F	G	H	THK OF GOLD	Pos.	P/N		

PRINT DIST
 単位: ㎜ DIMENSIONS IN MM. DO NOT SCALE PRINT

AMP-J010-2C
 REV. 3/93

				tyco Electronics		Tyco Electronics AMP K.K. Kawasaki, Japan	
包含電線断面積 (WIRE RANGE)		被覆外径 (INSULATION DIA.)		名称 (NAME)			
mm ² (AWG -)		mmφ		AMP FH CONNECTOR RECEPTACLE (VERTICAL) FOR 8mm STACKING			
材料 (MATERIAL)		仕上 (FINISH)		一般公差 (GENERAL TOLERANCE)		LOC 番号 (No.)	
①		②		10以下: ±0.2 10を超え30以下: ±0.25 30を超え100以下: ±0.3 角: ±3°		B J C-5917628	
O RELEASED (FJ80-0582-04)		08JUN04		DE. T.KAWAMAE		尺度 (SCALE)	
LTR DESCRIPTION		DATE		DWN APVD		REV. 0 SHEET 1 OF 1	
CHK. I.ENOMOTO		09JUN04		APP. I.ENOMOTO		NTS	

(CUSTOMER DRAWING) 参考 面