



Micro Commercial Components

Micro Commercial Components  
20736 Marilla Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

# MMBT3906

## PNP General Purpose Amplifier

### Features

- Capable of 300mWatts of Power Dissipation
- Surface Mount SOT-23 Package
- Marking:2A
- Case Material:Molded Plastic. UL Flammability Classification Rating 94-0 and MSL Rating 1

### Maximum Ratings

Symbol	Rating	Rating	Unit
$V_{CEO}$	Collector-Emitter Voltage	-40	V
$V_{CBO}$	Collector-Base Voltage	-40	V
$V_{EBO}$	Emitter-Base Voltage	-5.0	V
$I_C$	Collector Current, Continuous	-0.2	A
$P_D$	Power Dissipation	0.3	W
$T_J$	Operating Junction Temperature	-55 to +150	°C
$T_{STG}$	Storage Temperature	-55 to +150	°C


### Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage* ( $I_C=-1.0mA$ , $I_B=0$ )	-40		Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ( $I_C=-10\mu A$ , $I_E=0$ )	-40		Vdc
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ( $I_E=-10\mu A$ , $I_C=0$ )	-5.0		Vdc
$I_{CBO}$	Collector cut-off Current ( $V_{CB}=-40Vdc$ , $I_E=0$ )		-0.1	$\mu A$
$I_{CEX}$	Collector Cut-off Current ( $V_{CE}=-30Vdc$ , $V_{BE}=-3.0Vdc$ )		-50	nA
$I_{EBO}$	Emitter cut-off Current ( $V_{EB}=-5Vdc$ , $I_C=0$ )		-0.1	$\mu A$
$h_{FE}$	DC Current Gain* ( $I_C=-10mA$ , $V_{CE}=-1.0Vdc$ ) ( $I_C=-50mA$ , $V_{CE}=-1.0Vdc$ ) ( $I_C=-100mA$ , $V_{CE}=-1.0Vdc$ )	100 60 30	300	
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ( $I_C=-10mA$ , $I_B=-1.0mA$ ) ( $I_C=-50mA$ , $I_B=-5.0mA$ )		-0.25 -0.4	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ( $I_C=-10mA$ , $I_B=-1.0mA$ ) ( $I_C=-50mA$ , $I_B=-5.0mA$ )	-0.65	-0.85 -0.95	Vdc
$f_T$	Current Gain-Bandwidth Product ( $I_C=-10mA$ , $V_{CE}=-20Vdc$ , $f=100MHz$ )	250		MHz

### SWITCHING CHARACTERISTICS


Symbol	Parameter	Conditions	Max	Unit
$t_d$	Delay Time	( $V_{CC}=-3.0Vdc$ , $V_{BE}=-0.5Vdc$ )	35	ns
$t_r$	Rise Time	( $I_C=-10mA$ , $I_{B1}=-1.0mA$ )	35	ns
$t_s$	Storage Time	( $V_{CC}=-3.0Vdc$ , $I_C=-10mA$ )	225	ns
$t_f$	Fall Time	( $I_{B1}=I_{B2}=-1.0mA$ )	75	ns







\*Pulse Width  $\leq 300\mu s$ , Duty Cycle  $\leq 2.0\%$

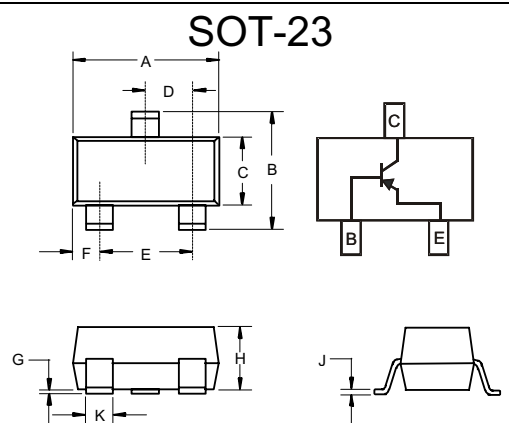







DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.110	.120	2.80	3.04	
B	.083	.098	2.10	2.64	
C	.047	.055	1.20	1.40	
D	.035	.041	.89	1.03	
E	.070	.081	1.78	2.05	
F	.018	.024	.45	.60	
G	.0005	.0039	.013	.100	
H	.035	.044	.89	1.12	
J	.003	.007	.085	.180	
K	.015	.020	.37	.51	

### Suggested Solder Pad Layout




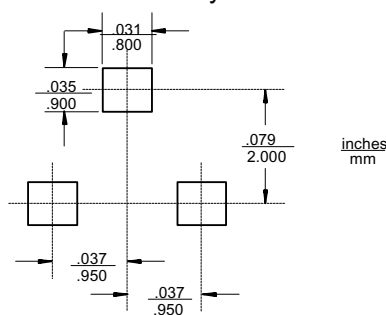


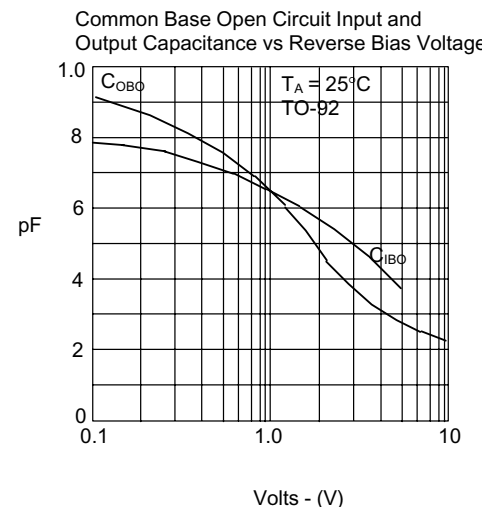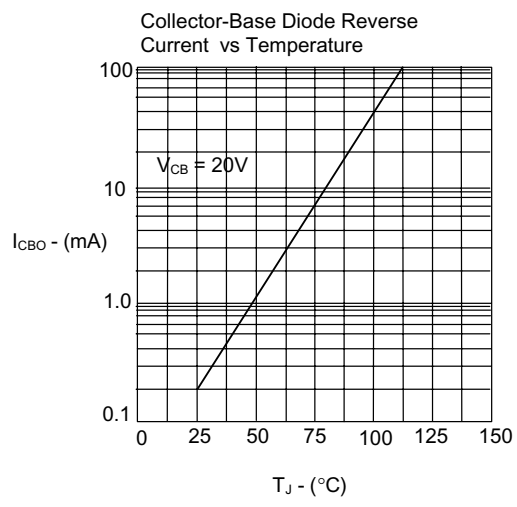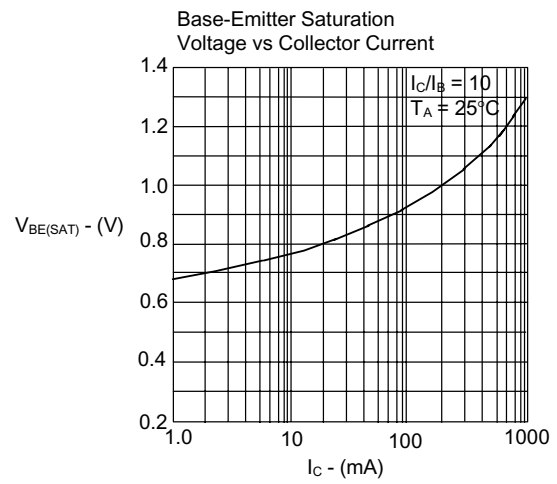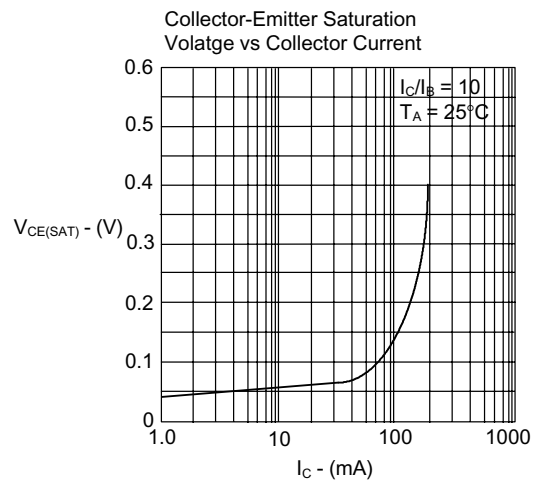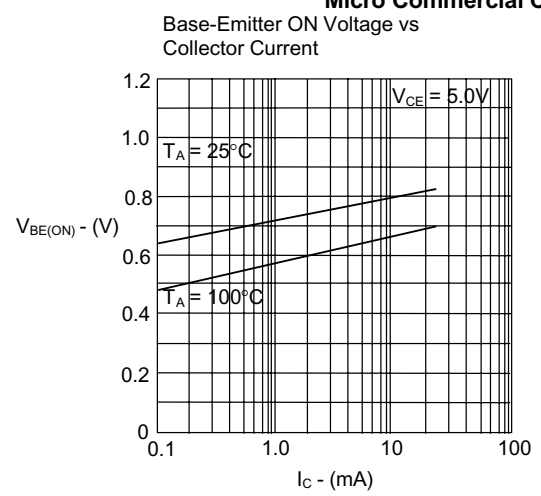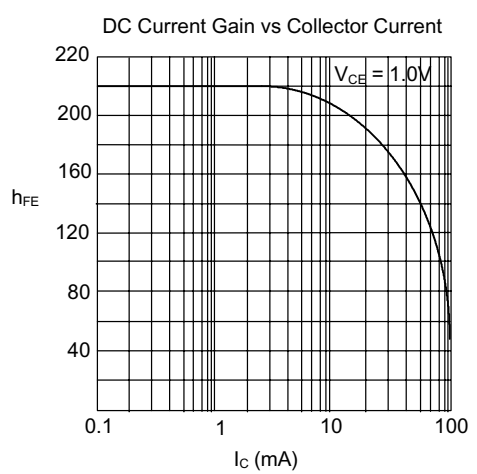

# MMBT3906

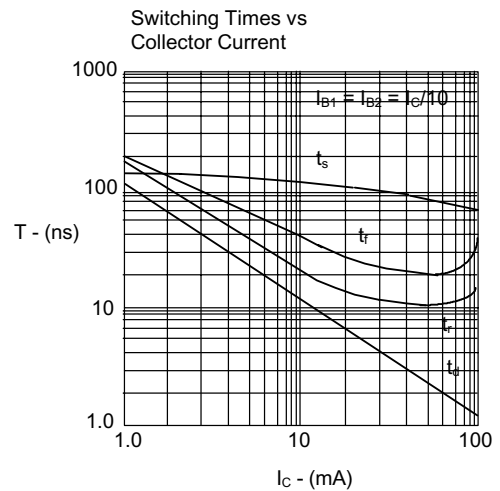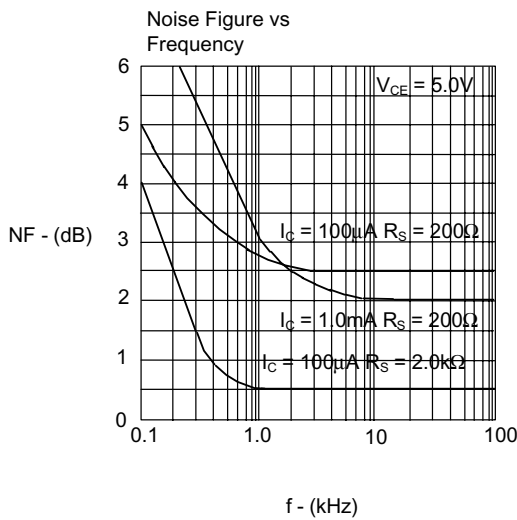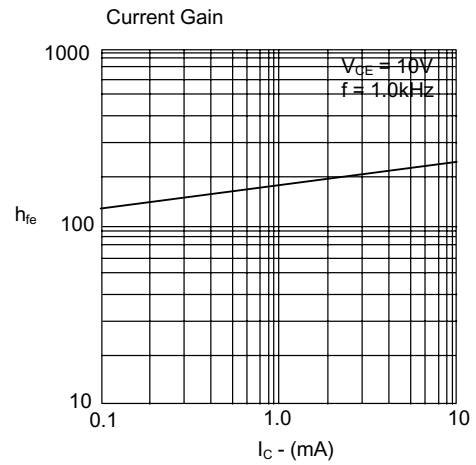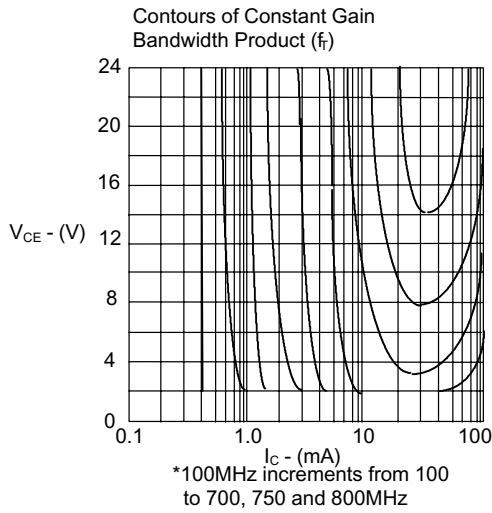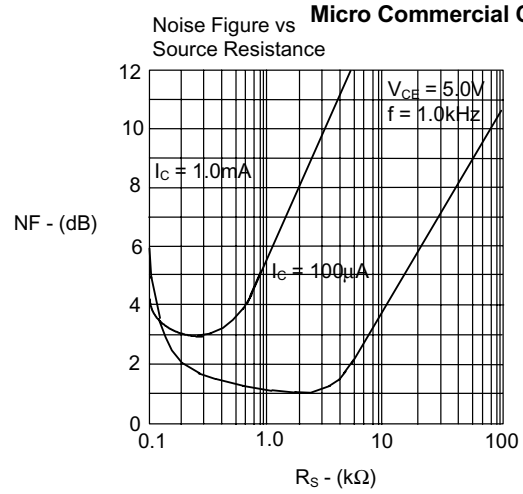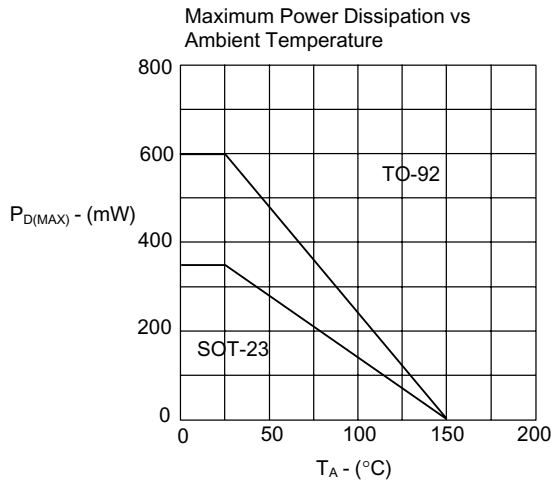

# MMBT3906

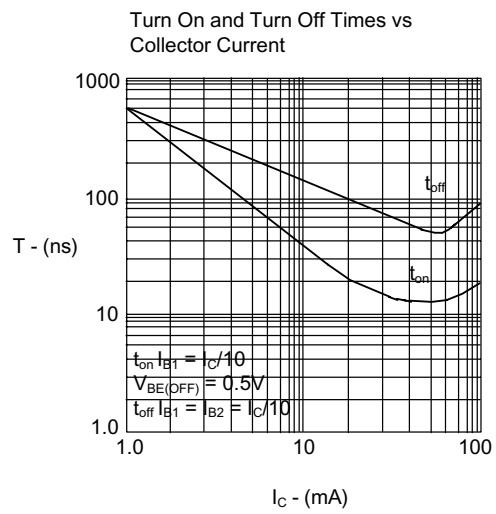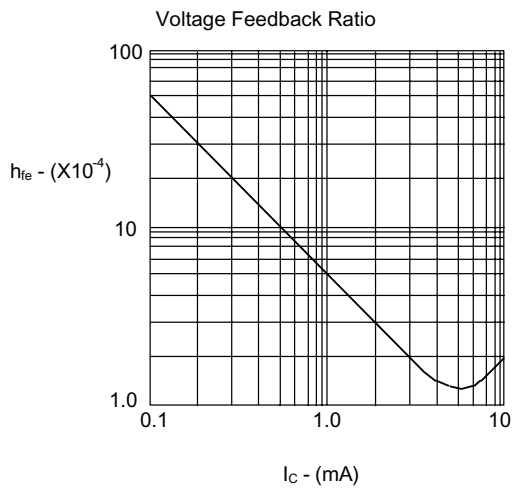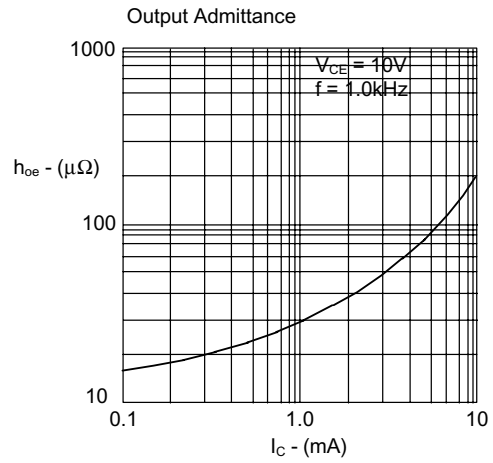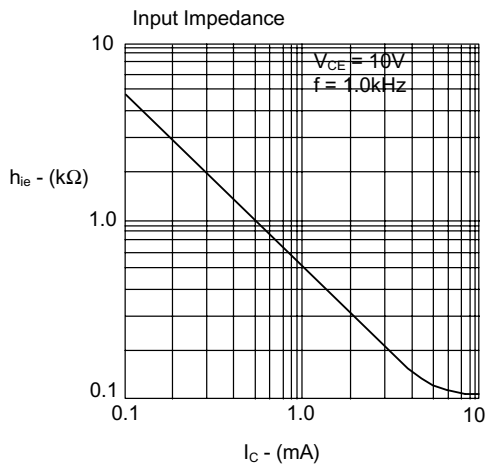



Micro Commercial Components

## Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

### \*\*\*IMPORTANT NOTICE\*\*\*

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. *Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

### \*\*\*APPLICATIONS DISCLAIMER\*\*\*

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.