



Micro Commercial Components

Micro Commercial Components  
20736 Marilla Street Chatsworth  
CA 91311  
Phone: (818) 701-4933  
Fax: (818) 701-4939

## MMBT5551

### NPN Plastic Encapsulate Transistor

## Features

- Collector Current:  $I_{CM}=0.6A$
- Collector-Base Voltage:  $V_{(BR)CBO}=180V$
- Operating And Storage Temperatures  $-55^{\circ}C$  to  $150^{\circ}C$
- Capable of 0.3Watts of Power Dissipation
- Marking: G1
- Case Material:Molded Plastic. UL Flammability  
Classificatio Rating 94-0 and MSL Rating 1

### Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------

#### OFF CHARACTERISTICS

$V_{(BR)CEO}$	Collector -Emitter Breakdown Voltage ( $I_C=1.0mA$ , $I_B=0$ )	160	---	Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ( $I_C=100\mu A$ , $I_E=0$ )	180	---	Vdc
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage ( $I_E=10\mu A$ , $I_C=0$ )	6.0	---	Vdc
$I_{CBO}$	Collector Cutoff Current ( $V_{CB}=120Vdc$ , $I_E=0$ )	---	0.1	$\mu A$
$I_{EBO}$	Emitter Cutoff Current ( $V_{EB}=4.0Vdc$ , $I_C=0$ )	---	0.1	$\mu A$


#### ON CHARACTERISTICS

$h_{FE-1}$	DC Current Gain ( $V_{CE}=5.0Vdc$ , $I_C=1.0mA$ )	80	---	---
$h_{FE-2}$	DC Current Gain ( $V_{CE}=5.0Vdc$ , $I_C=10mA$ )	100	200	---
$h_{FE-3}$	DC Current Gain ( $V_{CE}=5.0Vdc$ , $I_C=50mA$ )	50	---	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ( $I_C=50mA$ , $I_B=5.0mA$ )	---	0.5	Vdc
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ( $I_C=50mA$ , $I_B=5.0mA$ )	---	1.0	Vdc

#### SMALL-SIGNAL CHARACTERISTICS


$f_T$	Current Gain-Bandwidth Product ( $I_C=10mA$ , $V_{CE}=5.0Vdc$ , $f=30MHz$ )	100	---	MHz
-------	--------------------------------------------------------------------------------	-----	-----	-----

### SOT-23

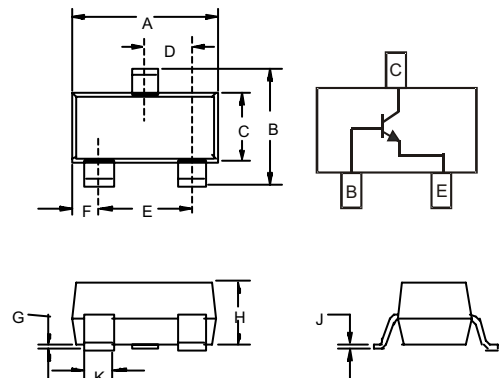

DIMENSIONS					
DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.110	.120	2.80	3.04	
B	.083	.098	2.10	2.64	
C	.047	.055	1.20	1.40	
D	.035	.041	.89	1.03	
E	.070	.081	1.78	2.05	
F	.018	.024	.45	.60	
G	.0005	.0039	.013	.100	
H	.035	.044	.89	1.12	
J	.003	.007	.085	.180	
K	.015	.020	.37	.51	

### Suggested Solder Pad Layout

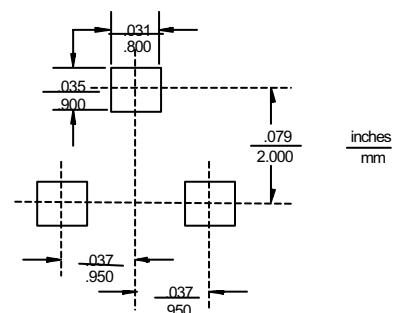

## Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

### \*\*\*IMPORTANT NOTICE\*\*\*

*Micro Commercial Components Corp.* reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .  
*Micro Commercial Components Corp.* does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

### \*\*\*APPLICATIONS DISCLAIMER\*\*\*

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.