



Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

MMST2907A

Features


- Power dissipation: 200mW ($T_{amb}=25^{\circ}\text{C}$)
- Collector current: -0.6A
- Marking Code: K3F
- Operating and Storage junction temperature range
-55°C to +150°C
- Case Material: Molded Plastic. UL Flammability
Classification Rating 94V-0 and MSL Rating 1

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units	
OFF CHARACTERISTICS ⁽²⁾					
V _{(BR)CEO}	Collector-Emitter Breakdown Voltage (I _C =-10mAdc, I _B =0)	-60	---	Vdc	
V _{(BR)CBO}	Collector-Base Breakdown Voltage (I _C =-10uAdc, I _E =0)	-60	---	Vdc	
V _{(BR)EBO}	Collector-Emitter Breakdown Voltage (I _E =-10uAdc, I _C =0)	-5.0	---	Vdc	
I _{CBO}	Collector Cutoff Current (V _{CB} =-50Vdc, I _E =0Vdc)	---	-0.01	μAdc	
I _{CEO}	Collector Cutoff Current (V _{CE} =-35Vdc, I _B =0Vdc)	---	-0.05	μAdc	
I _{EBO}	Emitter Cutoff Current (V _{EB} =-3Vdc, I _C =0Vdc)	---	-0.01	μAdc	
h _{FE}	DC Current Gain (I _C =-150mAdc, V _{CE} =-10Vdc) (I _C =-1mAdc, V _{CE} =-10Vdc)	100 100	300 ---	--- ---	
V _{CE(sat)}	Collector-Emitter Saturation Voltage (I _C =-500mAdc, I _B =-50mAdc)	---	-0.6	Vdc	
V _{BE(sat)}	Base-Emitter Saturation Voltage (I _C =-500mAdc, I _B =-50mAdc)	---	-1.2	Vdc	
f _T	Current Gain-Bandwidth Product (V _{CE} =-20Vdc, I _C =-50mAdc, f=100MHz)	200	---	MHz	
C _{ob}	Output Capacitance (V _{CB} =-10Vdc, f=1.0MHz, I _E =0)	---	8	pF	
t _d	Delay Time	V _{CC} =-30V, I _C =-150mA, V _{BE(off)} =-0.5V, I _{B1} =-15mA	---	10 25	ns ns
t _r	Rise Time	V _{CC} =-30V, I _C =-150mA, I _{B1} =I _{B2} =-15mA	---	80	ns
t _s	Storage Time		---	30	ns
t _f	Fall Time		---		


PNP Small Signal Transistors

SOT-323

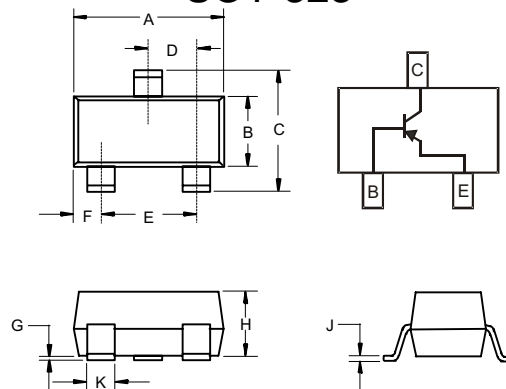

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.071	.087	1.80	2.20	
B	.045	.053	1.15	1.35	
C	.079	.087	2.00	2.20	
D	.026 Nominal		0.65 Nominal		
E	.047	.055	1.20	1.40	
F	.012	.016	.30	.40	
G	.000	.004	.000	.100	
H	.035	.039	.90	1.00	
J	.004	.010	.100	.250	
K	.012	.016	.30	.40	

Suggested Solder Pad Layout



Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

IMPORTANT NOTICE

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp.* and all the companies whose products are represented on our website, harmless against all damages.

APPLICATIONS DISCLAIMER

Products offer by *Micro Commercial Components Corp.* are not intended for use in Medical, Aerospace or Military Applications.