



Micro Commercial Components

Micro Commercial Components
 20736 Marilla Street Chatsworth
 CA 91311
 Phone: (818) 701-4933
 Fax: (818) 701-4939

MMST3906

Features

- Epitaxial Planar Die Construction
- Complementary NPN Type available (MMST3904)
- Ultra-small surface mount package
- Marking : K5N
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1

PNP Small Signal Transistors

Maximum Ratings

Symbol	Rating	Rating	Unit
V_{CEO}	Collector-Emitter Voltage	40	V
V_{CBO}	Collector-Base Voltage	40	V
V_{EBO}	Emitter-Base Voltage	5.0	V
I_C	Collector Current-Continuous ⁽¹⁾	200	mA
P_C	Power dissipation ⁽¹⁾	200	mW
T_J	Junction Temperature	-55 to +150	°C
T_{STG}	Storage Temperature	-55 to +150	°C

Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------

OFF CHARACTERISTICS ⁽²⁾


$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ($I_C=1.0mA$, $I_B=0$)	40	---	Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ($I_C=10uA$, $I_E=0$)	40	---	Vdc
$V_{(BR)EBO}$	Collector-Emitter Breakdown Voltage ($I_C=10uA$, $I_C=0$)	5.0	---	Vdc
I_{CEX}	Collector-Base Cutoff Current ($V_{CE}=30Vdc$, $V_{EB(OFF)}=3.0Vdc$)	---	50	nAdc
I_{BL}	Emitter-Base Cutoff Current ($V_{CE}=30Vdc$, $V_{EB(OFF)}=3.0Vdc$)	---	50	nAdc

ON CHARACTERISTICS ⁽²⁾

h_{FE}	DC Current Gain ($I_C=100uA$, $V_{CE}=1.0Vdc$) ($I_C=1.0mA$, $V_{CE}=1.0Vdc$) ($I_C=10mA$, $V_{CE}=1.0Vdc$) ($I_C=50mA$, $V_{CE}=1.0Vdc$) ($I_C=500mA$, $V_{CE}=1.0Vdc$)	60 80 100 60 30	---	---	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ($I_C=10mA$, $I_B=1.0mA$) ($I_C=50mA$, $I_B=5.0mA$)	---	0.20 0.30	Vdc	
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ($I_C=10mA$, $I_B=1.0mA$) ($I_C=50mA$, $I_B=5.0mA$)	0.65 ---	0.85 0.95	Vdc	

Note: 1. Valid provided that terminals are kept at ambient temperature.
 2. Pulse test: Pulse width<300us, duty cycle<2%


SOT-323

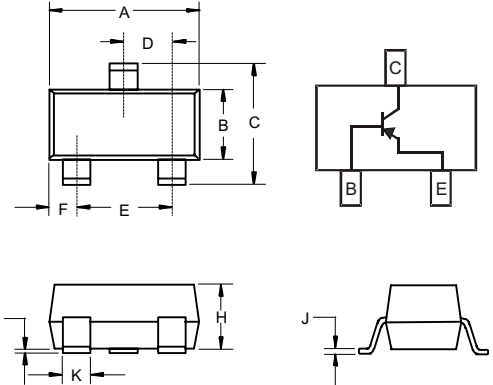

DIMENSIONS

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.071	.087	1.80	2.20	
B	.045	.053	1.15	1.35	
C	.079	.087	2.00	2.20	
D	.026 Nominal		0.65Nominal		
E	.047	.055	1.20	1.40	
F	.012	.016	.30	.40	
G	.000	.004	.000	.100	
H	.035	.039	.90	1.00	
J	.004	.010	.100	.250	
K	.012	.016	.30	.40	

Suggested Solder Pad Layout



SMALL SIGNAL CHARACTERISTICS

C_{obo}	Output Capacitance ($V_{CB}=5.0Vdc, f=1.0MHz, I_E=0$)	---	4.5	pF	
C_{ibo}	Input Capacitance ($V_{EB}=0.5Vdc, f=1.0MHz, I_C=0$)	---	10	pF	
h_{ie}	Input Impedance	$V_{CE}=10Vdc, I_C=1.0mA, f=1.0KHz$	2.0	12	kohms
h_{re}	Voltage Feedback Ratio		0.1	10	$\times 10^{-4}$
h_{fe}	Small Signal Current Gain		100	400	---
h_{oe}	Output Admittance		3.0	60	μS
f_T	Current Gain-Bandwidth Product ($V_{CE}=20Vdc, I_C=10mA, f=100MHz$)	300	---	MHz	
NF	Noise Figure ($V_{CE}=5.0Vdc, I_C=100\mu A, R_S=1.0KOHMS, f=1.0KHz$)	---	4.0	dB	

SWITCHING CHARACTERISTICS

t_d	Delay Time	$V_{CC}=3.0Vdc, I_C=10mA,$	---	35	ns
t_r	Rise Time	$V_{BE(off)}=0.5Vdc, I_{B1}=1.0mA$	---	35	ns
t_s	Storage Time	$V_{CC}=3.0Vdc, I_C=10mA,$	---	225	ns
t_f	Fall Time	$I_{B1}=I_{B2}=1.0mA$	---	75	ns



Micro Commercial Components

Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp . reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .
Micro Commercial Components Corp . does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp* . and all the companies whose products are represented on our website, harmless against all damages.

*****APPLICATIONS DISCLAIMER*****

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical, Aerospace or Military Applications.