



Series 518 Open Frame Collet Sockets w/Solder Pin Tails

FEATURES


- Open Frame allows efficient utilization of board space with optimized cooling
- Choose from several pin styles
- Compatible with automatic insertion equipment
- Side-to-side and end-to-end stackable

SPECIFICATIONS

- Body Material: black UL 94V-0 glass-filled 4/6 Nylon
- Pin Body: Brass Alloy 360 1/2-hard per UNS C36000 ASTM B16-00
- Pin Body Plating: 10 μ [0.25 μ] min. Gold per MIL-G-45204
or
200 μ [5.08 μ] min. 93/7 Tin/Lead per ASTM B545
or
200 μ [5.08 μ] min. Tin per ASTM B545 Type 1 over 100 μ [2.54 μ] min. Nickel per SAE AMS-QQ-N-290
- 4-fingered Collet Contact: Beryllium-Copper per UNS C17200 ASTM B194-01
- Contact Plating: 200 μ [5.08 μ] min. 93/7 Tin/Lead per ASTM B545
or
200 μ [5.08 μ] min. Tin per ASTM B545 Type 1
or
10 μ [0.25 μ] Gold per MIL-G-45204 over 50 μ min. [1.27 μ] Nickel per SAE AMS-QQ-N-290
- Available Plating: Heavy Gold 30 μ [0.76 μ]
- Contact Current Rating: 3 amps
- Operating Temperature: 221°F [105°C] Tin and Tin/Lead plating 257°F [125°C] Gold plating
- Insertion Force: 180 grams/pin
- Withdrawal Force: 90 grams/pin
- Normal Force: 140 grams/pin
- Midget Pin Insertion Force: 370 grams/pin
- Midget Pin Withdrawal Force: 150 grams/pin
- Midget Pin Normal Force: 240 grams/pin, based on a 0.018 [0.46] diameter test lead
- Accepts Lead Lengths from 0.100 [2.54] min. and 0.015-0.025 [0.38-0.64] diameter
- Accepts Midget Pin Lead Lengths from 0.080 [2.03] and up to 0.022 [0.56] diameter

MOUNTING CONSIDERATIONS

- Suggested PCB Hole Size for Solder Pin Tail and Extra Long Pin: 0.030 \pm 0.002 [0.76 \pm 0.05] diameter
- Suggested PCB Hole Size for Midget Pin: 0.040 \pm 0.002 [1.02 \pm 0.05] diameter

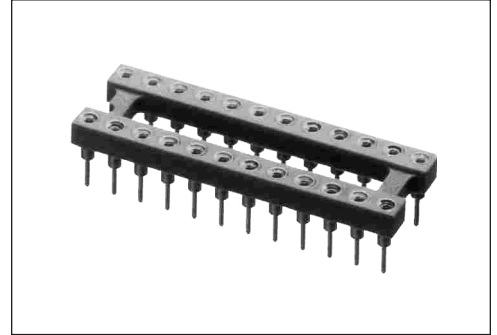


Bristol, PA 19007-6810 USA
TEL (215) 781-9956 • FAX (215) 781-9845
WWW.ARIESELEC.COM • INFO@ARIESELEC.COM





Series 518 Open Frame Collet Sockets w/Solder Pin Tails

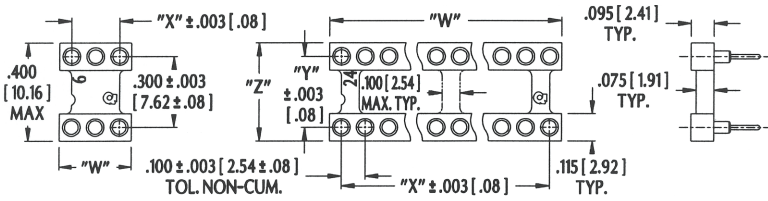


STYLE A

STYLE B,C (2.3 RIB)

Style D (4,5 rib) not shown

Frame Style	No. of Ribs	Centers "Y"	Dim. "Z"	Available Sizes
A	1	0.300 [7.62]	0.400 [10.16]	6
B	2	0.300 [7.62]	0.400 [10.16]	8, 14, 16, 18, 20, 24 20, 22
		0.400 [10.16]	0.500 [12.70]	
C	3	0.300 [7.62]	0.400 [10.16]	28 24 24, 28, 32, 40, 48
		0.400 [10.16]	0.500 [12.70]	
		0.600 [15.24]	0.700 [17.78]	
D	4, 5	0.900 [22.86]	1.000 [25.40]	50, 64

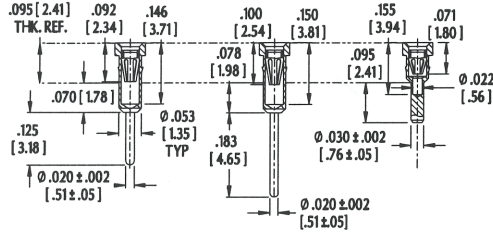

NOTES

CONSULT FACTORY FOR OTHER SIZES & CONFIGURATIONS

"W" (# PINS PER ROW) x 0.100 [2.54]
 "X" (# PINS PER ROW -1) x 0.100 [2.54]

Other Collet Pins available, consult Data Sheet

12017 for Wire Wrap Pins

12018 for Surface Mount Pins

12026 and **12027** for Open-Frame Capacitor sockets

ALL TOLERANCES: ±0.005 [0.13]
 UNLESS OTHERWISE SPECIFIED

ALL DIMENSIONS: INCHES [MILLIMETERS]

ORDERING INFORMATION

XX-X518-1XXXXXX

Pin Count
(see Table)

Row-to-Row Spacing

3 "Y" = 0.300 [7.62]

4 "Y" = 0.400 [10.16]

6 "Y" = 0.600 [15.24]

9 "Y" = 0.900 [22.86]

Series

Solder Pin Tail

Plating

0 = Gold Collet, Tin Shell

OE = Gold Collet, Tin Shell w/Extra Long Solder Tail

OTL = Gold Collet, Tin-Lead Shell

1 = Gold Collet, Gold Shell

Optional Suffix

H = Heavy Gold on Collet

T = Tin on Collet

TL Tin-Lead on Collet

M = Midget Solder Tail - Available Gold Collet, Tin Shell

MTL = Midget Solder Tail - Available Gold Collet, Tin-Lead Shell Only



Bristol, PA 19007-6810 USA
 TEL (215) 781-9956 • FAX (215) 781-9845
 WWW.ARIESELEC.COM • INFO@ARIESELEC.COM

