


LOC		DIST		REVISIONS			
AD	00	P	LTR	DESCRIPTION	DATE	DMN	APVD
		R	EC	063C 0645 04	11MAR05	BSV	DFR
		R1		REVISED PER ECO-09-021826	07JAN10	KK	AEG

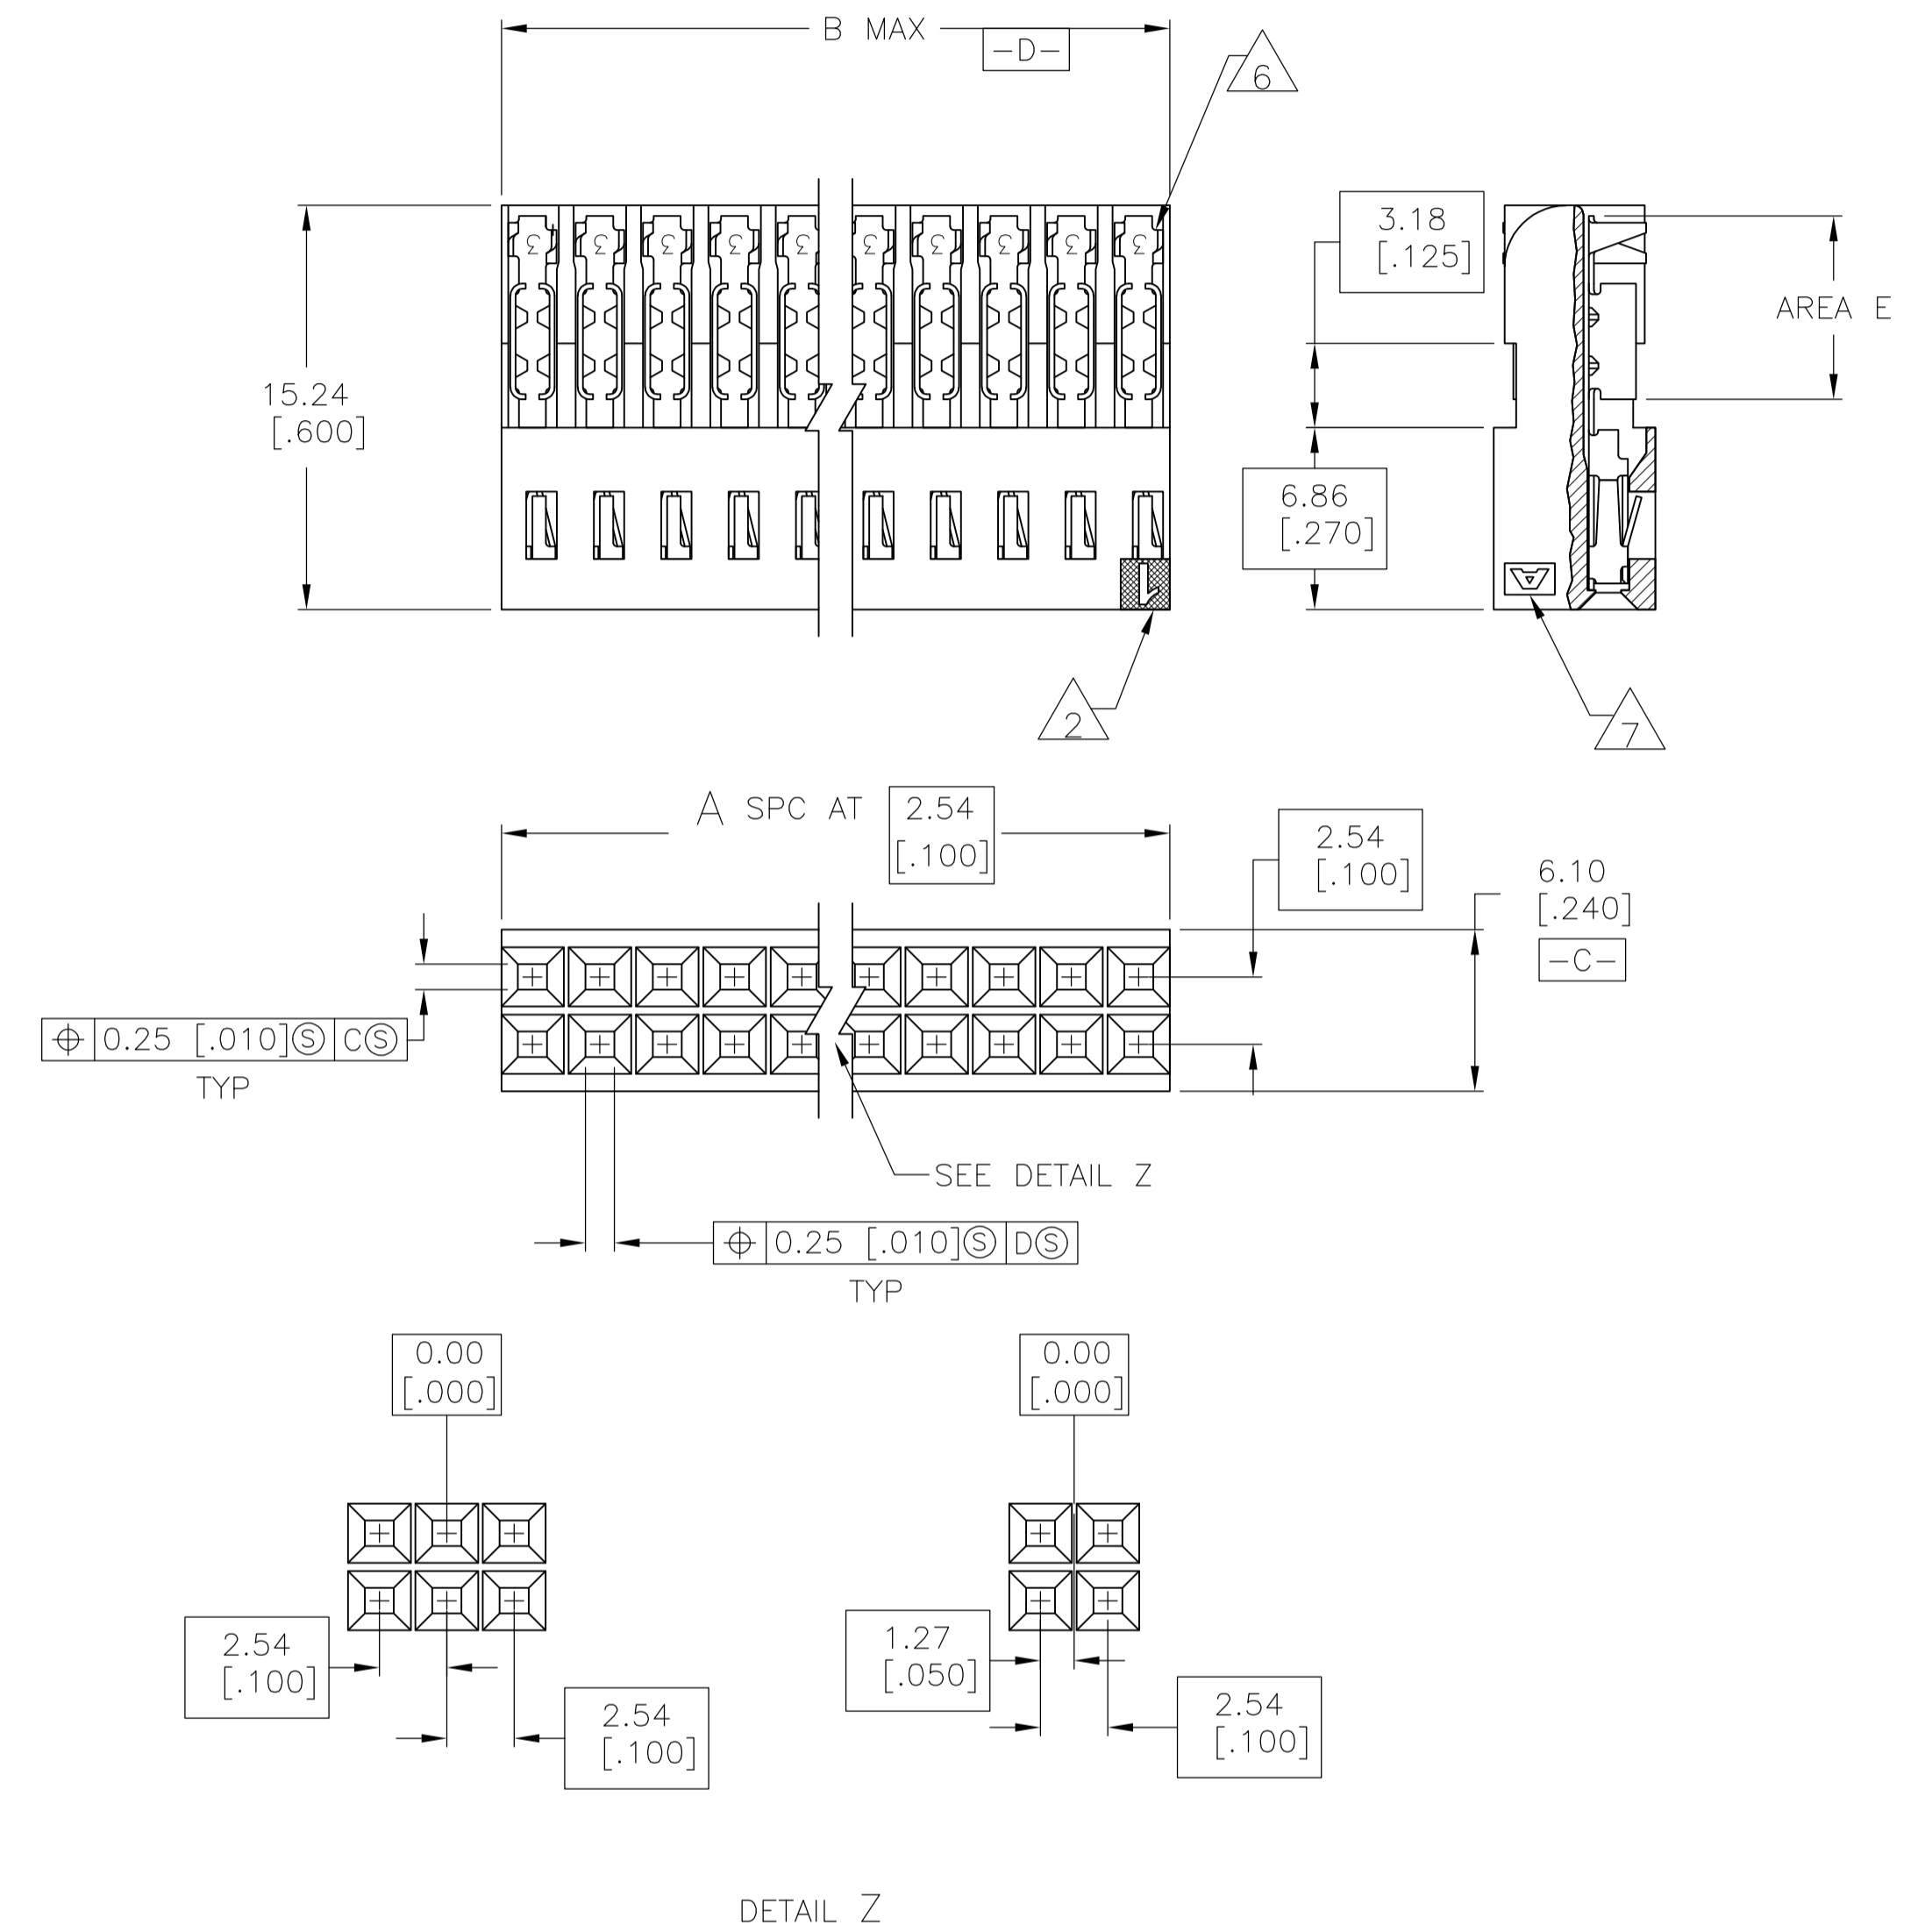

- 1 HOUSING: PBT, UL 94V-0 RATED, COLOR-BLACK
CONTACTS: COPPER ALLOY PER ASTM B103
- 2 MOLDED CIRCUIT #1 IDENTIFIER IN LOCATION SHOWN.
- 3 0.00076[.000030] MIN GOLD IN CONTACT AREA, 0.00127-0.00254 [.000050-.000100] TIN-LEAD IN AREA E, ALL OVER 0.00127[.000050] MIN NICKEL.
- 4 0.00076[.000030] MIN GOLD IN CONTACT AREA, 0.00127-0.00254 [.000050-.000100] TIN IN AREA E, ALL OVER 0.00127[.000050] MIN NICKEL.
- 5. USE WITH #20-#22 AWG WIRE SIZE, .050 MAX INSULATION DIA., .015 MAX INSULATION WALL THICKNESS.
- 6 CONTACT IDENTIFICATION NUMBER "3" LOCATED IN THIS AREA.
- 7 AMP TRADEMARK (EITHER SIDE).
- 8 OBSOLETE PART NUMBER.
- 9 ROHS 2002/95/EC COMPLIANT.
- 10 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

FINISH	B	A	NO. OF POSN	PART NO.
10	OBSOLETE	4 9	81.28 [3.200]	31 64 8-102448-0
10	OBSOLETE	4 9	76.20 [3.000]	29 60 7-102448-8
		4 9	63.50 [2.500]	24 50 7-102448-3
		4 9	50.80 [2.000]	19 40 6-102448-8
		4 9	43.18 [1.700]	16 34 6-102448-5
10	OBSOLETE	4 9	40.64 [1.600]	15 32 6-102448-4
		4 9	38.10 [1.500]	14 30 6-102448-3
10	OBSOLETE	4 9	35.56 [1.400]	13 28 6-102448-2
		4 9	33.02 [1.300]	12 26 6-102448-1
		4 9	30.48 [1.200]	11 24 6-102448-0
10	OBSOLETE	4 9	27.94 [1.100]	10 22 5-102448-9
		4 9	25.40 [1.000]	9 20 5-102448-8
		4 9	22.86 [.900]	8 18 5-102448-7
10	OBSOLETE	4 9	20.32 [.800]	7 16 5-102448-6
		4 9	17.78 [.700]	6 14 5-102448-5
		4 9	15.24 [.600]	5 12 5-102448-4
		4 9	12.70 [.500]	4 10 5-102448-3
		4 9	10.16 [.400]	3 8 5-102448-2
10	OBSOLETE	4 9	7.62 [.300]	2 6 5-102448-1

FINISH	B	A	NO. OF POSN	PART NO.
		3	91.44 [3.600]	35 72 3-102448-4
		3	88.90 [3.500]	34 70 3-102448-3
		3	86.36 [3.400]	33 68 3-102448-2
		3	83.82 [3.300]	32 66 3-102448-1
10	OBSOLETE	3	81.28 [3.200]	31 64 3-102448-0
10	OBSOLETE	3	78.74 [3.100]	30 62 2-102448-9
10	OBSOLETE	3	76.20 [3.000]	29 60 2-102448-8
		3	73.66 [2.900]	28 58 2-102448-7
		3	71.12 [2.800]	27 56 2-102448-6
		3	68.58 [2.700]	26 54 2-102448-5
		3	66.04 [2.600]	25 52 2-102448-4
		3	63.50 [2.500]	24 50 2-102448-3
		3	60.96 [2.400]	23 48 2-102448-2
		3	58.42 [2.300]	22 46 2-102448-1
		3	55.88 [2.200]	21 44 2-102448-0
		3	53.34 [2.100]	20 42 1-102448-9
		3	50.80 [2.000]	19 40 1-102448-8
		3	48.26 [1.900]	18 38 1-102448-7
		3	45.72 [1.800]	17 36 1-102448-6
10	OBSOLETE	3	43.18 [1.700]	16 34 1-102448-5
10	OBSOLETE	3	40.64 [1.600]	15 32 1-102448-4
		3	38.10 [1.500]	14 30 1-102448-3
10	OBSOLETE	3	35.56 [1.400]	13 28 1-102448-2
		3	33.02 [1.300]	12 26 1-102448-1
		3	30.48 [1.200]	11 24 1-102448-0
10	OBSOLETE	3	27.94 [1.100]	10 22 102448-9
		3	25.40 [1.000]	9 20 102448-8
		3	22.86 [.900]	8 18 102448-7
		3	20.32 [.800]	7 16 102448-6
		3	17.78 [.700]	6 14 102448-5
		3	15.24 [.600]	5 12 102448-4
		3	12.70 [.500]	4 10 102448-3
10	OBSOLETE	3	10.16 [.400]	3 8 102448-2
10	OBSOLETE	3	7.62 [.300]	2 6 102448-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

APPROVED: S. SHUEY, M. RIDER, R. FELLIX

DATE: 06JAN92, 07JAN92

TYCO ELECTRONICS CORPORATION, Harrisburg, Pa 17105-3608

AMPMODU MT, RCPT ASSY, STANDARD PRESSURE CONTACTS FOR 20-22 AWG WIRE SIZE

SIZE: A1, WEIGHT: 00779, SCALE: 4:1, SHEET: 1 OF 1, REV: R1