
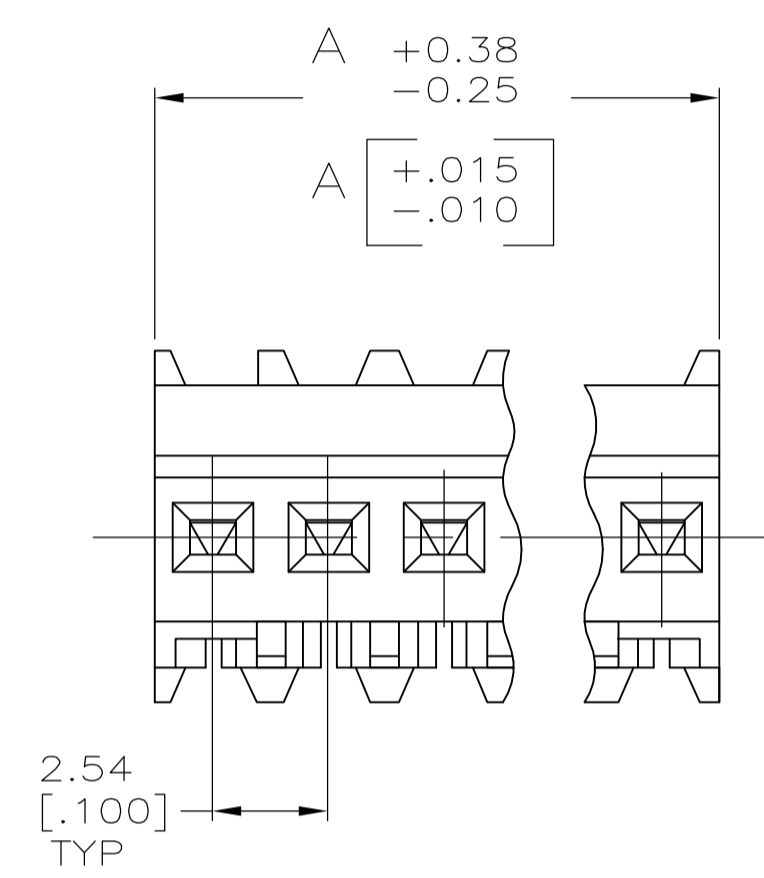
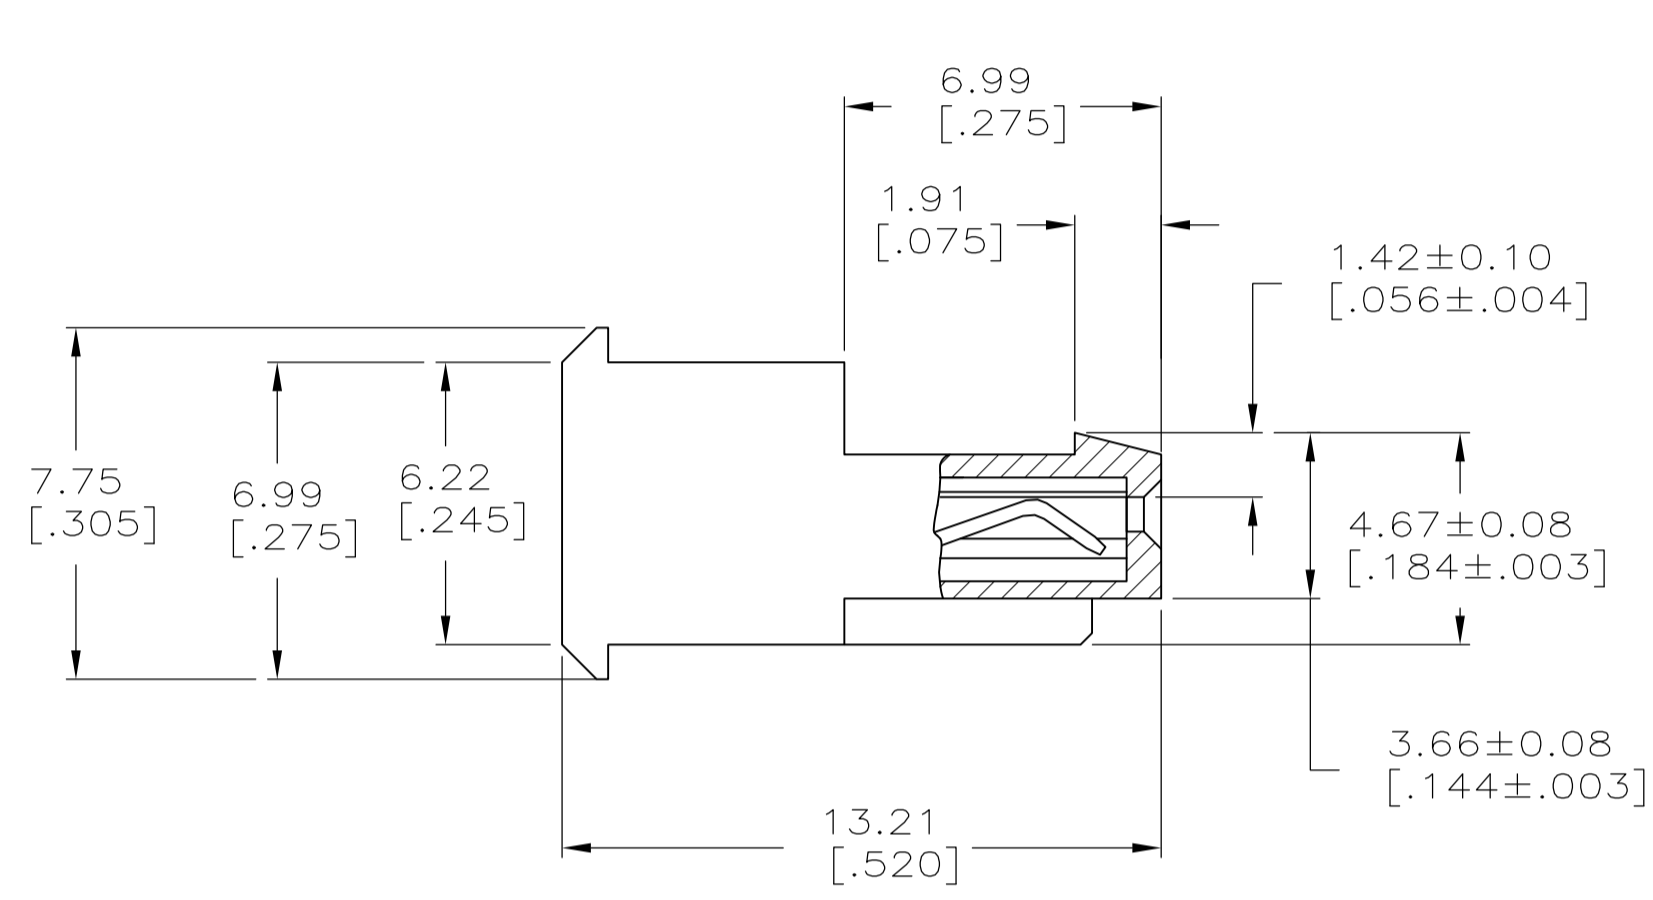


LOC	DIST	REVISIONS			
P	LTR	DESCRIPTION	DATE	DMN	APVO
J		REVISED PER ECO-07-003754	27FEB07	KW	DB
J1		REVISED PER ECO-09-023313	13OCT09	KK	AEG

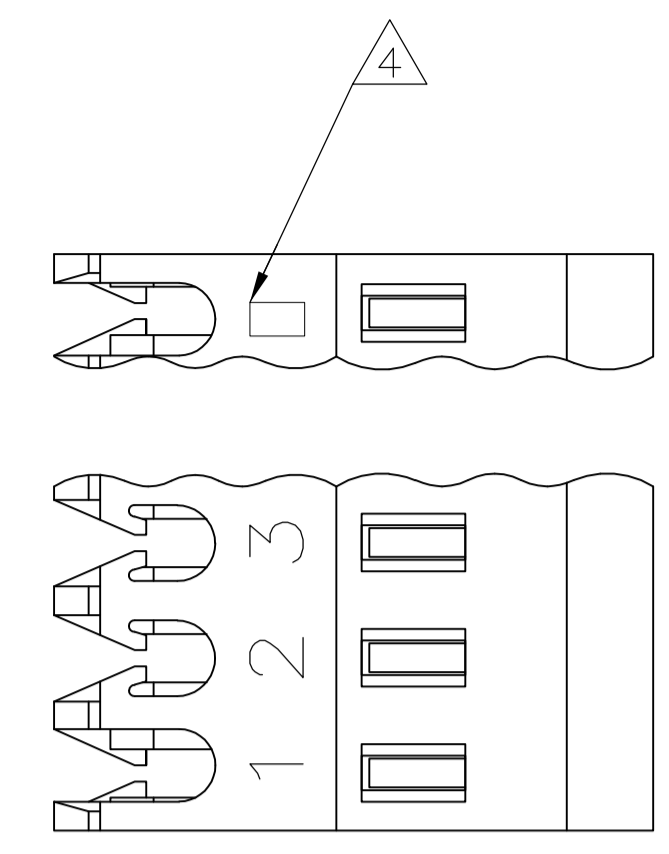

- △ MATERIAL: CONNECTOR-NYLON UL94V-2 (GREEN). CONTACTS-0.30 [.012] THICK COPPER ALLOY 0.000038 [.000015] GOLD IN CONTACT AREA WITH BRIGHT TIN-LEAD FOR 641201-2 THRU 2-641201-8, MATTE WHISKER MITIGATED TIN FOR 3-641201-2 THRU 5-641201-8 OVER NICKEL UNDERPLATE.
- CONTACTS ACCEPT 28 AWG WIRE WITH 1.52 [.060] MAX INSULATION DIAMETER.
  - CONTACTS MUST ACCEPT 0.64±0.03 [.025±.001] SQUARE POST AND REMAIN LOCKED IN POSITION.
- △ IDENTIFICATION NUMBER FOR LAST CIRCUIT MAY NOT APPEAR ON ALL ASSEMBLIES.
- DIMENSIONS IN BRACKETS ARE IN INCHES.
  - HOUSING FEATURES ARE: FEED THRU WITH LOCKING RAMP.
- △ OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

71.12 [2.800]	28	5-641201-8
68.58 [2.700]	27	5-641201-7
66.04 [2.600]	26	5-641201-6
63.50 [2.500]	25	5-641201-5
60.96 [2.400]	24	5-641201-4
58.42 [2.300]	23	5-641201-3
55.88 [2.200]	22	5-641201-2
53.34 [2.100]	21	5-641201-1
50.80 [2.000]	20	5-641201-0
48.26 [1.900]	19	4-641201-9
45.72 [1.800]	18	4-641201-8
43.18 [1.700]	17	4-641201-7
40.64 [1.600]	16	4-641201-6
38.10 [1.500]	15	4-641201-5
35.56 [1.400]	14	4-641201-4
33.02 [1.300]	13	4-641201-3
30.48 [1.200]	12	4-641201-2
27.94 [1.100]	11	4-641201-1
25.40 [1.000]	10	4-641201-0
22.86 [.900]	9	3-641201-9
20.32 [.800]	8	3-641201-8
17.78 [.700]	7	3-641201-7
15.24 [.600]	6	3-641201-6
12.70 [.500]	5	3-641201-5
10.16 [.400]	4	3-641201-4
7.62 [.300]	3	3-641201-3
5.08 [.200]	2	3-641201-2
DIM A	NO.OF POSN	ASSEMBLY

71.12 [2.800]	28	2-641201-8
68.58 [2.700]	27	2-641201-7
66.04 [2.600]	26	2-641201-6
63.50 [2.500]	25	2-641201-5
60.96 [2.400]	24	2-641201-4
58.42 [2.300]	23	2-641201-3
55.88 [2.200]	22	2-641201-2
53.34 [2.100]	21	2-641201-1
50.80 [2.000]	20	2-641201-0
48.26 [1.900]	19	1-641201-9
45.72 [1.800]	18	1-641201-8
43.18 [1.700]	17	1-641201-7
40.64 [1.600]	16	1-641201-6
38.10 [1.500]	15	1-641201-5
35.56 [1.400]	14	1-641201-4
33.02 [1.300]	13	1-641201-3
30.48 [1.200]	12	1-641201-2
27.94 [1.100]	11	1-641201-1
25.40 [1.000]	10	1-641201-0
22.86 [.900]	9	641201-9
20.32 [.800]	8	641201-8
17.78 [.700]	7	641201-7
15.24 [.600]	6	641201-6
12.70 [.500]	5	641201-5
10.16 [.400]	4	641201-4
7.62 [.300]	3	641201-3
5.08 [.200]	2	641201-2
DIM A	NO.OF POSN	ASSEMBLY



THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm [INCHES]	TOLERANCES UNLESS OTHERWISE SPECIFIED:	DIN S. HOOVER 20-DEC-2004	APPRO D. ROSSI 20-DEC-2004	Tyco Electronics Corporation Harrisburg, Pa 17105-3608
0. PLC ±	1. PLC ±	2. PLC ±	3. PLC ±	4. PLC ±
ANGLES ±				
MATERIAL △	FINISH △	APPRO D. ROSSI 20-DEC-2004	NAME	RESTRICTED TO
		PRODUCT SPEC	108-1050	
		APPLICATION SPEC	114-1019	
		WEIGHT	A1 00779	DRAWING NO
		CUSTOMER DRAWING	SCALE 6:1	SHEET 1 OF 1 REV J1