



## Part Search

[Back](#)
[Search Again?](#)

### Card Edge

#### Series 243 Card Edge Connector

.200" (5.08mm) Contact Spacing



#### FEATURES


- .200" (5.08mm) Contact Spacing x .200" (5.08mm) Row Spacing
- Accepts .062" (1.57mm) Nominal Thickness PC Board
- High Profile Insulator Body, .656" (16.66mm)
- Insulating Bushings Press into Metal Backplane
- Modular Design permits any Connector Length Assembly
- Contact Termination .045" (1.14mm) Square Wire Wrap
- Accepts Between Contact and In-Contact Polarizing Keys

#### SPECIFICATIONS

- Insulator Material: Thermoplastic Polyester, UL 94V-0, Colour: White
- Contact Material: Phosphor Bronze Alloy CA-510
- Contact Plating: Gold over Nickel for Entire Contact
- Current Rating: 5 Amperes Continuous
- Contact Resistance: 10 Milliohms Maximum

- Dielectric Withstanding Voltage: 1800 V AC rms at Sea Level Between Adjacent Contacts
- Insulation Resistance: 5000 Megohms Minimum
- Operating Temperature: -65 to +125 Degrees C
- Insertion Force: 16 oz (4.45 N) Maximum per Contact Pair when Tested with a .070" (1.78mm) Thick Gauge
- Withdrawal Force: 1 oz (0.28 N) Minimum per Contact Pair when Tested with a .054" (1.37mm) Thick Gauge

### ORDERING CODE

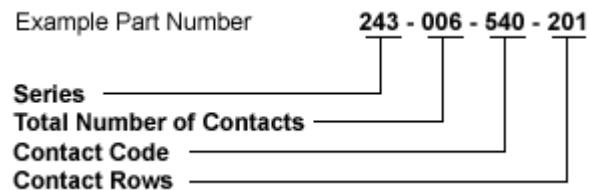

### Series 243

Total Number of Contacts	Contact Rows
002 or 003	Single Row
004 or 006	Dual Row

Contact Code	Description & Tail Size	Tail Length "G"
542	Wire Wrap .045" Square (1.14mm Square)	.650" (16.51mm)

Contact Rows	Description
101	Single Row
201	Dual Row

### [Connector Sizes and Dimensions](#)

### [Card Guide Options](#)

For more information on these products, please contact us at "[edac@edac.net](mailto:edac@edac.net)", or visit our "[Custom Solutions](#)" page to help us better understand your needs.

[Home](#) | [About Us](#) | [Reps & Distributors](#) | [ISO 9001 Quality Assurance](#) | [Contact Us](#) | [Online Catalogue](#)

[Press Releases](#) | [Sample Order Form](#) | [Product Search](#) | [Custom Solutions](#) | [User Sign-In](#) | [Site Map](#)