


SIGN	DATE	DESCRIPTION	APPROVER
		THIS IS CAD DRAWING, DO NOT REVISE MANUALLY!!!	

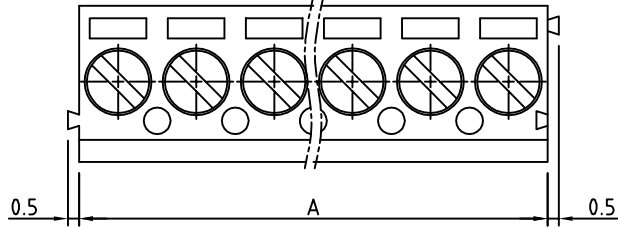

- Material:
- Terminal body
 - (metal housing): Brass(CuZn)
 - Terminal screw: Steel Plated Zinc
 - Wire guard: Stainless steel
 - Surface of solder tail: Tin plated
 - Insulator(housing): Thermoplastic (UL94V-0)

- Electrical:
- | | | |
|--------------------------|------------------|----------|
| | UL | CSA |
| ● Voltage rating: | 125V | 125V |
| ● Current rating: | 10A | 10A |
| ● Wire range: | | |
| ● Solid wire(AWG): | 16-26 | 16-26 |
| ● Stranded wire(AWG): | 16-26 | 16-26 |
| ● Torque: | 1.7Lb-In | 4 Kgf.cm |
| ● Screw: | M2 | |
| ● Wire strip length: | 5-6mm | |
| ● Withstanding Voltage: | 1.25 KV | 1.25 KV |
| ● Operating temperature: | -30°C to +105°C | |
| ● Soldering temperature: | 245°C±10°C/5 Sec | |
| ● Safety Approval: | | |
- RoHS Compliant



PART NUMBER **OSTTEXX0164**

No. of Poles

- 02: 2 Poles
- 03: 3 Poles
- ...
- 24: 24 Poles

COLOR

- 0: Black
- 5: Green
- 6: Blue (Standard)
- 8: Grey

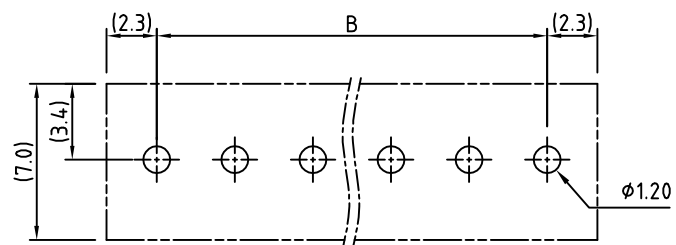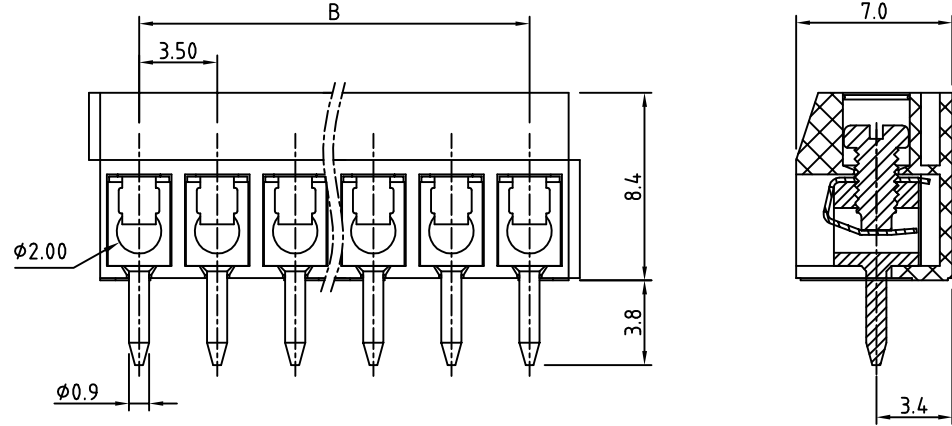

P.C.B. LAYOUT

POLE		2	3	4	5	6	7	8	9	10	11	12	
A		7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	42.00	
B		3.50	7.00	10.50	14.00	17.50	21.00	24.50	28.00	31.50	35.00	38.50	
Tol.		±0.10					±0.15						
POLE		13	14	15	16	17	18	19	20	21	22	23	24
A		45.50	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50	84.00
B		42.00	45.50	49.00	52.50	56.00	59.50	63.00	66.50	70.00	73.50	77.00	80.50
Tol.		±0.20					±0.30						



TITLE	OSTTE 3.5mm Solid block series "-" Screw												
PART NO.	OSTTEXX0164						DWG NO.	OSTTEXX0164.DWG					
APPROVED	CHECKED	DESIGNED	DRAWN	CUST NO.									
		Tony 2007.12.12	Tony 2007.12.12										
							UNIT: mm	Tolerance					
					SHEET: 01/01		SCALE: NONE	X.	±0.50				
							REV.: B	X.X	±0.30				
								X.XX	±0.10				
								X°	±1°				